

◆ 开拓太阳能路灯的先驱者 ◆
Pioneers in solar street lighting



联系我们
Contact us

邮箱/Mail: Oslifan8734@gmail.com

电话/Telephonel: 17666489092

facebook

WhatsApp: 17666480902



产品手册
Product manual

● ZHONGSHANQIANJILIGHTINGCO.LTD

关于我们

ABOUT US

广东千吉照明有限公司，坐落于中国灯都古镇，是一家国家级高新技术企业。其在中山古镇、江门设有两个生产基地。自2004年起，公司专注于户外照明产品的设计、研发、生产及销售，并于2007年正式注册“千吉”品牌。作为一家提供全方位解决方案和专业施工安装服务的综合服务企业，千吉照明致力于为客户提供优质服务。


千吉照明历经多年发展，已构建起完善的生产制造体系和销售服务体系，拥有先进的大型灯体生产加工设备，并持有城市及道路照明工程专业承包二级资质。公司先后荣获国家ISO9001质量管理体系认证、ISO14001环境管理体系认证、职业健康安全管理体系认证、节能认证、CQC认证等多项认证，是智慧路灯行业标准制定的积极参与者之一。千吉照明为客户提供智慧路灯、交安杆件等综合解决方案，以及非标订制的景观照明设计、生产、安装、产品售后等一站式专业服务，为城市信息化、数字化、智能化提供全面的智慧科技管理平台。公司主要产品包括高杆灯、智慧路灯、多功能交通综合杆、太阳能路灯、玉兰灯、中华灯、庭院灯、景观灯等3000多个品种，产品广泛应用于市政道路、大型广场、城市园林景观、公园、文旅项目、学校、机场、新农村建设项目等领域。

千吉照明秉持“千里征途、万道吉光”的企业愿景，坚守“质量为本、服务至上、信誉为尊”的经营理念，不断优化产品设计、工艺及质量体系，致力于为客户提供卓越品质的产品和服务。公司期待与您携手共创美好未来！

Guangdong Qianji Lighting Co., Ltd. is located in the ancient town of China's lighting capital. It is a national-level high-tech enterprise. The company has two production bases in Zhongshan Ancient Town and Jiangmen. Since 2004, the company has focused on the design, research and development, production and sales of outdoor lighting products, and officially registered the "Qianji" brand in 2007. As a comprehensive service enterprise providing all-round solutions and professional construction and installation services, Qianji Lighting is committed to providing customers with high-quality services.

Over the years of development, Qianji Lighting has established a complete production and manufacturing system and sales service system. It has advanced large-scale lamp body production and processing equipment and holds the second-level qualification for urban and road lighting engineering professional contracting. The company has successively obtained multiple certifications such as the national ISO9001 quality management system certification, ISO14001 environmental management system certification, occupational health and safety management system certification, energy-saving certification, and CQC certification. It is one of the active participants in the formulation of industry standards for smart streetlights. Qianji Lighting provides customers with comprehensive solutions such as smart streetlights, traffic safety poles, etc., as well as one-stop professional services for non-standard customized landscape lighting design, production, installation, and product after-sales, providing a comprehensive smart technology management platform for urban informatization, digitalization, and intelligence. The company's main products include high-pole lights, smart streetlights, multi-functional traffic integrated poles, solar street lights, plum blossom lights, Chinese lanterns, courtyard lights, landscape lights, etc., totaling over 3,000 varieties. The products are widely used in municipal roads, large squares, urban garden scenes, parks, cultural tourism projects, schools, airports, new rural construction projects, and other fields.

Qianji Lighting adheres to the corporate vision of "a thousand-mile journey and ten thousand paths of good luck" and the business philosophy of "quality first, service supreme, reputation paramount". It continuously optimizes product design, processes, and quality systems, and is committed to providing customers with excellent products and services. The company looks forward to working with you to create a better future together!








产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-120-200W	397*342*71mm	5730灯珠 162珠*3 SMD 5730, 162chips*3	335*308mm 6V12W	32650磷酸铁锂 10AH 32650 LiFePO ₄ , 10AH
SE-QJ-120-400W	564*342*71mm	5730灯珠 324珠*3 SMD 5730, 324 chips*3	335*475mm 6V20W	32650磷酸铁锂 15AH 32650 LiFePO ₄ , 15AH
SE-QJ-120-600W	740*342*71mm	5730灯珠 496珠*3 SMD 5730, 496chips*3	335*644mm 6V30W	32650磷酸铁锂 20AH 32650 LiFePO ₄ , 20AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C-+60°C
防护等级/Protection Rating	IP65/66/67

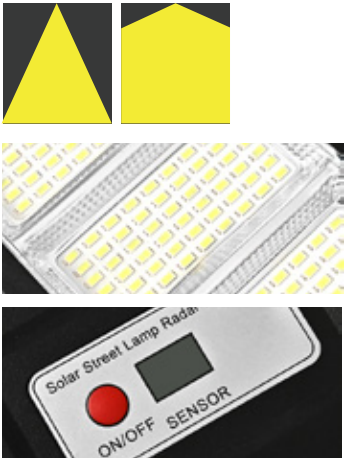

人体感应遥控
一体式太阳能路灯

All-in-One Street Light
Infrared remote control






SE-QJ-121-180W SE-QJ-121-240W SE-QJ-121A-320W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-121A-180W	390*238*70mm	5730灯珠 162珠*2 SMD 5730, 162chips*2	334*231mm 6V6W	32650磷酸铁锂 5AH 32650 LiFePO ₄ , 5AH
SE-QJ-121A-240W	590*238*70mm	5730灯珠 324珠*2 SMD 5730, 324 chips*2	502*231mm 6V12W	32650磷酸铁锂 10AH 32650 LiFePO ₄ , 10AH
SE-QJ-121A-320W	745*238*70mm	5730灯珠 496珠*2 SMD 5730, 496chips*2	654*231mm 6V15W	32650磷酸铁锂 12AH 32650 LiFePO ₄ , 12AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C-+60°C
防护等级/Protection Rating	IP65/66/67

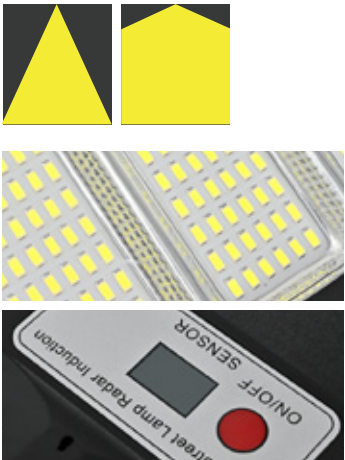

红外远程遥控
一体式太阳能路灯

All-in-One Street Light
Infrared remote control






SE-QJ-121A-200W SE-QJ-121A-400W SE-QJ-121A-600W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-121A-200W	390*238*70mm	5730灯珠 162珠*2 SMD 5730, 162chips*2	334*231mm 6V6W	32650磷酸铁锂 5AH 32650 LiFePO ₄ , 5AH
SE-QJ-121A-400W	590*238*70mm	5730灯珠 324珠*2 SMD 5730, 324 chips*2	502*231mm 6V12W	32650磷酸铁锂 10AH 32650 LiFePO ₄ , 10AH
SE-QJ-121A-600W	745*238*70mm	5730灯珠 496珠*2 SMD 5730, 496chips*2	654*231mm 6V15W	32650磷酸铁锂 12AH 32650 LiFePO ₄ , 12AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C-+60°C
防护等级/Protection Rating	IP65/66/67



红外远程遥控
一体式太阳能路灯

All-in-One Street Light
Infrared remote control





SE-QJ-GCB-500W SE-QJ-GCB-800W SE-QJ-GCB-1000W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-GCB-500W	924*354*90mm	5054灯珠 288珠 SMD 5054, 288 chips	900*330mm 6V55W	32650磷酸铁锂 48AH 32650 LiFePO ₄ , 48AH
SE-QJ-GCB-800W	1123*354*90mm	5054灯珠 384珠 SMD 5054, 384 chips	1100*330mm 6V70W	32650磷酸铁锂 54AH 32650 LiFePO ₄ , 54AH
SE-QJ-GCB-1000W	1323*354*90mm	5054灯珠 480珠 SMD 5054, 480 chips	1300*330mm 6V85W	32650磷酸铁锂 72AH 32650 LiFePO ₄ , 72AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C+60°C
防护等级/Protection Rating	IP65/66/67



新农村建设路灯

一体式太阳能路灯

All-in-One Street Light
Infrared remote control





产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-GCA-300W	924*354*90mm	5054灯珠 144珠 SMD 5054, 144 chips	900*330mm 6V55W	32650磷酸铁锂 48AH 32650 LiFePO ₄ , 48AH
SE-QJ-GCA-400W	1123*354*90mm	5054灯珠 192珠 SMD 5054, 192 chips	1100*330mm 6V70W	32650磷酸铁锂 54AH 32650 LiFePO ₄ , 54AH
SE-QJ-GCA-500W	1323*354*90mm	5054灯珠 240珠 SMD 5054, 240 chips	1300*330mm 6V85W	32650磷酸铁锂 72AH 32650 LiFePO ₄ , 72AH
SE-QJ-GCA-800W	1173*245*115mm	5054灯珠 360珠*2 SMD 5054, 360 chips*2	1167*221mm 6V30W	32650磷酸铁锂 25AH 32650 LiFePO ₄ , 25AH
SE-QJ-GCA-1000W	825*392*140mm	5054灯珠 360珠*4 SMD 5054, 360 chips*4	369*803mm 6V40W	32650磷酸铁锂 35AH 32650 LiFePO ₄ , 35AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C-+60°C
防护等级/Protection Rating	IP65/66/67



新农村建设路灯
一体式太阳能路灯

All-in-One Street Light
Infrared remote control





红外远程遥控
一体式太阳能路灯

All-in-One Street Light
Infrared remote control




SE-QJ-126A-600W SE-QJ-126A-800W SE-QJ-126A-1000W SE-QJ-126A-1000W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-127A-400W	485*229*70mm	5054灯珠 45珠*2 SMD 5054, 45 chips*2	397*212mm 6V8W	32650磷酸铁锂 8AH 32650 LiFePO ₄ , 8AH
SE-QJ-127A-600W	594*247*70mm	5054灯珠 45珠*3 SMD 5054, 45 chips*3	508*231mm 6V12W	32650磷酸铁锂 10AH 32650 LiFePO ₄ , 10AH
SE-QJ-127A-800W	680*247*70mm	5054灯珠 45珠*4 SMD 5054, 45 chips*4	598*230mm 6V15W	32650磷酸铁锂 12AH 32650 LiFePO ₄ , 12AH
SE-QJ-127B-800W	680*360*66mm	5054灯珠 180珠 SMD 5054, 180 chips	610*332mm 6V28W	32650磷酸铁锂 25AH 32650 LiFePO ₄ , 25AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C-+60°C
防护等级/Protection Rating	IP65/66/67






SE-QJ-FGA-600W SE-QJ-FGA-800W SE-QJ-FGA-1200W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-FGA-600W	340*428*70mm	5730灯珠 864珠 SMD 5730, 864 chips	335*388mm 6V12W	32650磷酸铁锂 10AH 32650 LiFePO ₄ , 10AH
SE-QJ-FGA-800W	548*340*72mm	5730灯珠 864珠 SMD 5730, 864 chips	335*510mm 25W	32650磷酸铁锂 20AH 32650 LiFePO ₄ , 20AH
SE-QJ-FGA-1200W	648*340*72mm	5730灯珠 1152珠 SMD 5730, 1152 chips	335*590mm 30W	32650磷酸铁锂 25AH 32650 LiFePO ₄ , 25AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C-+60°C
防护等级/Protection Rating	IP65/66/67



红外远程遥控
一体式太阳能路灯

All-in-One Street Light
Infrared remote control






SE-QJ-FGB-400W SE-QJ-FGB-600W SE-QJ-FGB-800W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-FGB-400W	428*220*75mm	5730灯珠 480珠 SMD 5730, 480 chips	397*212mm 6V8W	32650磷酸铁锂 8AH 32650 LiFePO ₄ , 8AH
SE-QJ-FGB-600W	540*239*75mm	5730灯珠 720珠 SMD 5730, 720chips	507*230mm 6V12W	32650磷酸铁锂 10AH 32650 LiFePO ₄ , 10AH
SE-QJ-FGB-800W	630*239*75mm	5730灯珠 960珠 SMD 5730, 960 chips	598*230mm 6V15W	32650磷酸铁锂 12AH 32650 LiFePO ₄ , 12AH

其他参数 Other parameters


显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20℃+60℃
防护等级/Protection Rating	IP65/66/67



红外远程遥控
一体式太阳能路灯

All-in-One Street Light
Infrared remote control



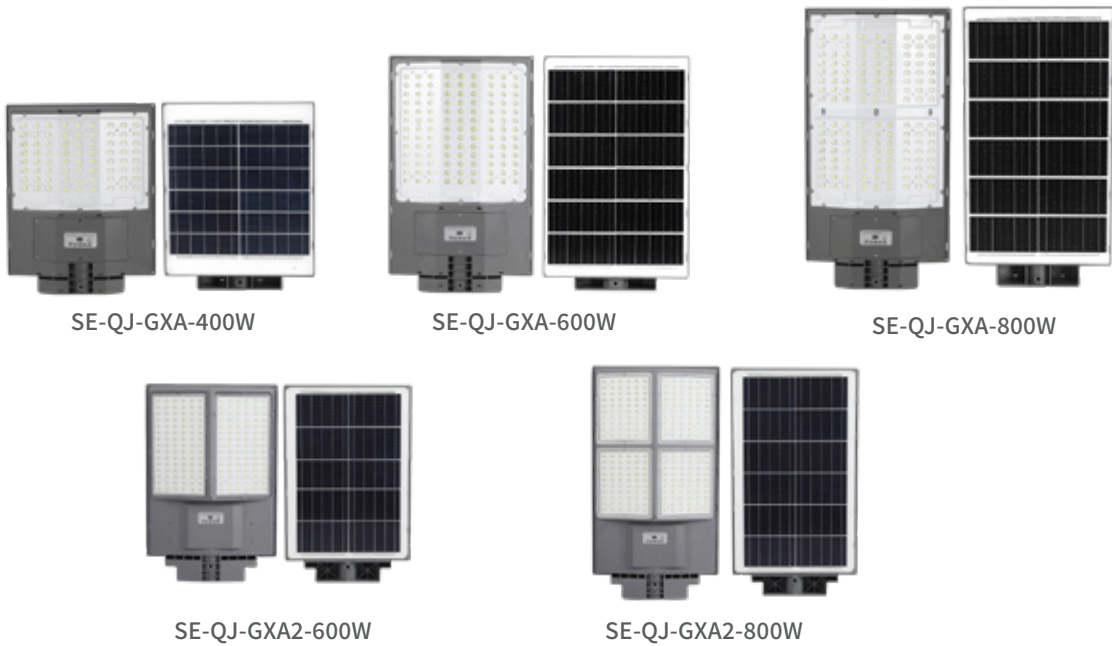

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-GXA-400W	340*428*70mm	5054灯珠 72珠 SMD 5054, 72 chips	335*388mm 6V12W	32650磷酸铁锂 10AH 32650 LiFePO ₄ , 10AH
SE-QJ-GXA-600W	548*340*72mm	5054灯珠 117珠 SMD 5054, 117 chips	335*510mm 25W	32650磷酸铁锂 15AH 32650 LiFePO ₄ , 15AH
SE-QJ-GXA-800W	648*340*72mm	5054灯珠 144珠 SMD 5054, 144 chips	335*590mm 30W	32650磷酸铁锂 25AH 32650 LiFePO ₄ , 25AH
SE-QJ-GXA2-600W	580*385*85mm	5054灯珠 180珠 SMD 5054, 180 chips	369*489mm 6V22W	32650磷酸铁锂 15AH 32650 LiFePO ₄ , 15AH
SE-QJ-GXA2-800W	700*385*85mm	5054灯珠 240珠 SMD 5054, 240 chips	369*614mm 6V30W	32650磷酸铁锂 20AH 32650 LiFePO ₄ , 20AH

其他参数 Other parameters

显色指数/CRI	70-80Ra	
SMD发光效率/SMD LuminousEfficacy	150-180LM/W	
光束角/Beam Ange	70°-140°	
控制器效率/ControllerEfficiency	>90%	
续航时间/Endurance Time	10-12H	
工作温度/WorkingTemperature	-20°C+60°C	
防护等级/Protection Rating	IP65/66/67	

人体感应遥控
一体式太阳能路灯

All-in-One Street Light
Infrared remote control





SE-QJ-GXB-200W

SE-QJ-GXB-400W

SE-QJ-GXB-600W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-GXB-200W	428*220*75mm	5054灯珠 60珠 SMD 5054, 60 chips	397*212mm 6V8W	32650磷酸铁锂 8AH 32650 LiFePO ₄ , 8AH
SE-QJ-GXB-400W	540*239*75mm	5054灯珠 90珠 SMD 5054, 90 chips	507*230mm 6V12W	32650磷酸铁锂 10AH 32650 LiFePO ₄ , 10AH
SE-QJ-GXB-600W	630*239*75mm	5054灯珠 120珠 SMD 5054, 120 chips	598*230mm 6V15W	32650磷酸铁锂 12AH 32650 LiFePO ₄ , 12AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C+60°C
防护等级/Protection Rating	IP65/66/67



红外远程遥控
一体式太阳能路灯

All-in-One Street Light
Infrared remote control





SE-QJ-BYA-400W



SE-QJ-BYA-600W



SE-QJ-BYA-800W



SE-QJ-BYA-1000W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-BYA-400W	510*340*70mm	5730灯珠 480珠 SMD 5730, 480 chips	335*420mm 6V18W	32650磷酸铁锂 12AH 32650 LiFePO ₄ , 12AH
SE-QJ-BYA-600W	595*340*70mm	5730灯珠 600珠 SMD 5730, 600 chips	335*510mm 6V20W	32650磷酸铁锂 15AH 32650 LiFePO ₄ , 15AH
SE-QJ-BYA-800W	675*340*70mm	5730灯珠 720珠 SMD 5730, 720 chips	335*590mm 6V28W	32650磷酸铁锂 20AH 32650 LiFePO ₄ , 20AH
SE-QJ-BYA-1000W	755*340*70mm	5730灯珠 840珠 SMD 5730, 840 chips	335*670mm 6V35W	32650磷酸铁锂 25AH 32650 LiFePO ₄ , 25AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C-+60°C
防护等级/Protection Rating	IP65/66/67



新农村建设路灯

一体式太阳能路灯

All-in-One Street Light

Infrared remote control





SE-QJ-BYA-400W



SE-QJ-BYA-600W



SE-QJ-BYA-800W



SE-QJ-BYA-1000W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-BYA-400W	510*340*70mm	5730灯珠 480珠 SMD 5730, 480 chips	335*420mm 6V18W	32650磷酸铁锂 12AH 32650 LiFePO ₄ , 12AH
SE-QJ-BYA-600W	595*340*70mm	5730灯珠 600珠 SMD 5730, 600 chips	335*510mm 6V20W	32650磷酸铁锂 15AH 32650 LiFePO ₄ , 15AH
SE-QJ-BYA-800W	675*340*70mm	5730灯珠 720珠 SMD 5730, 720 chips	335*590mm 6V28W	32650磷酸铁锂 20AH 32650 LiFePO ₄ , 20AH
SE-QJ-BYA-1000W	755*340*70mm	5730灯珠 840珠 SMD 5730, 840 chips	335*670mm 6V35W	32650磷酸铁锂 25AH 32650 LiFePO ₄ , 25AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C+60°C
防护等级/Protection Rating	IP65/66/67



新农村建设路灯

一体式太阳能路灯

All-in-One Street Light

Infrared remote control





新农村建设路灯
一体式太阳能路灯

All-in-One Street Light
Infrared remote control



SE-QJ-BYA-400W



SE-QJ-BYA-600W



SE-QJ-BYA-800W



SE-QJ-BYA-1000W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-BYA-400W	510*340*70mm	5730灯珠 480珠 SMD 5730, 480 chips	335*420mm 6V18W	32650磷酸铁锂 12AH 32650 LiFePO ₄ , 12AH
SE-QJ-BYA-600W	595*340*70mm	5730灯珠 600珠 SMD 5730, 600 chips	335*510mm 6V20W	32650磷酸铁锂 15AH 32650 LiFePO ₄ , 15AH
SE-QJ-BYA-800W	675*340*70mm	5730灯珠 720珠 SMD 5730, 720 chips	335*590mm 6V28W	32650磷酸铁锂 20AH 32650 LiFePO ₄ , 20AH
SE-QJ-BYA-1000W	755*340*70mm	5730灯珠 840珠 SMD 5730, 840 chips	335*670mm 6V35W	32650磷酸铁锂 25AH 32650 LiFePO ₄ , 25AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C-+60°C
防护等级/Protection Rating	IP65/66/67





SE-QJ-089A-600W

SE-QJ-089A-900W


SE-QJ-089A-1200W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-089A-600W	472*333*80mm	2835灯珠 324珠*2 SMD 2835, 324 chips*2	330*454mm 6V20W	32650磷酸铁锂 15AH 32650 LiFePO ₄ , 15AH
SE-QJ-089A-900W	638*333*80mm	2835灯珠 324珠*3 SMD 2835, 324 chips*3	330*610mm 6V28W	32650磷酸铁锂 20AH 32650 LiFePO ₄ , 20AH
SE-QJ-089A-1200W	750*333*80mm	2835灯珠 324珠*4 SMD 2835, 324 chips*4	330*736mm 6V35W	32650磷酸铁锂 24AH 32650 LiFePO ₄ , 24AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C+60°C
防护等级/Protection Rating	IP65/66/67



新农村建设路灯
一体式太阳能路灯

All-in-One Street Light
Infrared remote control





SE-QJ-126A-600W SE-QJ-126A-800W SE-QJ-126A-1000W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-126A-600W	413*365*60mm	5730灯珠 180珠*2 SMD 5730, 180chips*2	348*378mm 6V15W	32650磷酸铁锂 10AH 32650 LiFePO ₄ , 10AH
SE-QJ-126A-800W	503*365*60mm	5730灯珠 240珠*2 SMD 5730, 240chips*2	348*468mm 6V20W	32650磷酸铁锂 15AH 32650 LiFePO ₄ , 15AH
SE-QJ-126A-1000W	593*365*60mm	5730灯珠 300珠*2 SMD 5730, 300chips*2	348*559mm 6V25W	32650磷酸铁锂 20AH 32650 LiFePO ₄ , 20AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C+60°C
防护等级/Protection Rating	IP65/66/67



红外远程遥控
一体式太阳能路灯

All-in-One Street Light
Infrared remote control






产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-SM-500W	402*185*58mm	5730灯珠 480珠 SMD 5730, 480 chips	335*420mm 6V18W	32650磷酸铁锂 12AH 32650 LiFePO ₄ , 12AH
SE-QJ-SM-800W	638*333*80mm	5730灯珠 600珠 SMD 5730, 600 chips	335*510mm 6V20W	32650磷酸铁锂 15AH 32650 LiFePO ₄ , 15AH
SE-QJ-SM-1000W	750*333*80mm	5730灯珠 720珠 SMD 5730, 720 chips	335*590mm 6V28W	32650磷酸铁锂 20AH 32650 LiFePO ₄ , 20AH
SE-QJ-SM-1500W	750*333*80mm	5730灯珠 840珠 SMD 5730, 840 chips	335*670mm 6V35W	32650磷酸铁锂 25AH 32650 LiFePO ₄ , 25AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C+60°C
防护等级/Protection Rating	IP65/66/67

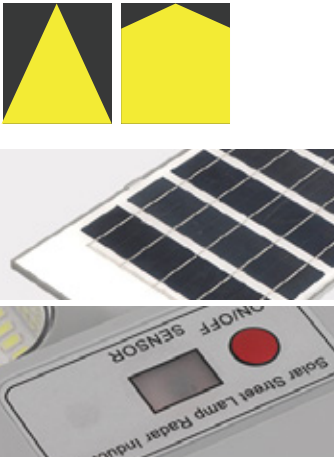

新农村建设路灯

一体式太阳能路灯

All-in-One Street Light
Infrared remote control





SE-QJ-129A-300W



SE-QJ-129A-600W



SE-QJ-129A-900W



SE-QJ-129A-1200W



SE-QJ-129A-2500W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-129A-300W	385*195*50mm	2835灯珠 146珠 SMD 2835, 146 bulbs	301*188mm 6V6W	32650磷酸铁锂 5AH 32650 LiFePO ₄ , 5AH
SE-QJ-129A-600W	454*220*50mm	2835灯珠 292珠 SMD 2835, 292 bulbs	396*212mm 6V8W	32650磷酸铁锂 6AH 32650 LiFePO ₄ , 6AH
SE-QJ-129A-900W	585*210*50mm	2835灯珠 438珠 SMD 2835, 438 bulbs	498*208mm 6V12W	32650磷酸铁锂 10AH 32650 LiFePO ₄ , 10AH
SE-QJ-129A-1200W	719*220*50mm	2835灯珠 584珠 SMD 2835, 584 bulbs	626*212mm 6V15W	32650磷酸铁锂 12AH 32650 LiFePO ₄ , 12AH
SE-QJ-129A-2500W	740*390*93mm	2835灯珠 1168珠 SMD 2835, 1168 bulbs	700*368mm 6V35W	32650磷酸铁锂 30AH 32650 LiFePO ₄ , 30AH
SE-QJ-129A-3000W	790*510*102mm	2835灯珠 1752珠 SMD 2835, 1752 bulbs	756*495mm 6V50W	32650磷酸铁锂 30AH 32650 LiFePO ₄ , 30AH

新农村建设路灯

一体式太阳能路灯

All-in-One Street Light


Infrared remote control



其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C-+60°C
防护等级/Protection Rating	IP65/66/67



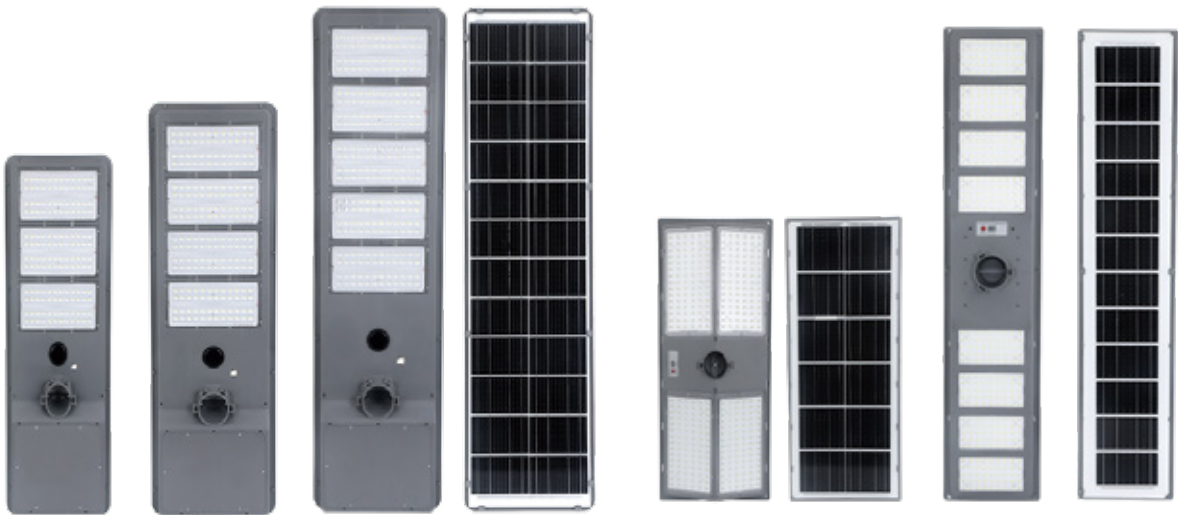

SE-QJ-GCA-1000W SE-QJ-GCA-800W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-GCA-300W	924*354*90mm	5054灯珠 144珠 SMD 5054, 144 chips	900*330mm 6V55W	32650磷酸铁锂 48AH 32650 LiFePO ₄ , 48AH
SE-QJ-GCA-400W	1123*354*90mm	5054灯珠 192珠 SMD 5054, 192 chips	1100*330mm 6V70W	32650磷酸铁锂 54AH 32650 LiFePO ₄ , 54AH
SE-QJ-GCA-500W	1323*354*90mm	5054灯珠 240珠 SMD 5054, 240 chips	1300*330mm 6V85W	32650磷酸铁锂 72AH 32650 LiFePO ₄ , 72AH
SE-QJ-GCA-800W	1173*245*115mm	5054灯珠 360珠*2 SMD 5054, 360 chips*2	1167*221mm 6V30W	32650磷酸铁锂 25AH 32650 LiFePO ₄ , 25AH
SE-QJ-GCA-1000W	825*392*140mm	5054灯珠 360珠*4 SMD 5054, 360 chips*4	369*803mm 6V40W	32650磷酸铁锂 35AH 32650 LiFePO ₄ , 35AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C+60°C
防护等级/Protection Rating	IP65/66/67



新农村建设路灯
一体式太阳能路灯

All-in-One Street Light
Infrared remote control





产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-131A-400W	472*333*80mm	5054灯珠 48珠*2 SMD 5054, 48 chips*2	330*454mm 6V20W	32650磷酸铁锂 15AH 32650 LiFePO ₄ , 15AH
SE-QJ-131A-600W	638*333*80mm	5054灯珠 48珠*3 SMD 5054, 48 chips*3	330*610mm 6V28W	32650磷酸铁锂 20AH 32650 LiFePO ₄ , 20AH
SE-QJ-131A-800W	750*333*80mm	5054灯珠 48珠*4 SMD 5054, 48 chips*4	330*736mm 6V35W	32650磷酸铁锂 25AH 32650 LiFePO ₄ , 25AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C-+60°C
防护等级/Protection Rating	IP65/66/67



新农村建设路灯

一体式太阳能路灯

All-in-One Street Light
Infrared remote control






产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-GH103	342*475*72mm	5054灯珠 360珠 SMD 5054, 360 chips	335*388mm 6V15W	32650磷酸铁锂 15AH 32650 LiFePO ₄ , 15AH
SE-QJ-GH103	342*598*72mm	5054灯珠 480珠 SMD 5054, 480 chips	335*510mm 6V25W	32650磷酸铁锂 20AH 32650 LiFePO ₄ , 20AH
SE-QJ-GH103	342*675*72mm	5054灯珠 600珠 SMD 5054, 600 chips	335*590mm 6V30W	32650磷酸铁锂 25AH 32650 LiFePO ₄ , 25AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C-+60°C
防护等级/Protection Rating	IP65/66/67

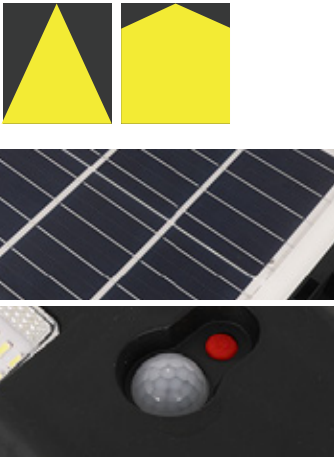

新农村建设路灯
一体式太阳能路灯

All-in-One Street Light
Infrared remote control





产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-GH104	230*485*52mm	5054灯珠 140珠 SMD 5054, 48 chips	230*507mm 6W	32650磷酸铁锂 6AH 32650 LiFePO ₄ , 6AH
SE-QJ-GH104	248*620*52mm	5054灯珠 210珠 SMD 5054, 48 chips	230*596mm 12W	32650磷酸铁锂 10AH 32650 LiFePO ₄ , 10AH
SE-QJ-GH104	248*720*52mm	5054灯珠 280珠 SMD 5054, 48 chips	212*396mm 15W	32650磷酸铁锂 12AH 32650 LiFePO ₄ , 12AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C-+60°C
防护等级/Protection Rating	IP65/66/67



新农村建设路灯

一体式太阳能路灯

All-in-One Street Light
Infrared remote control





SE-QJ-129A-300W



SE-QJ-129A-600W



SE-QJ-129A-900W



SE-QJ-129A-1200W



SE-QJ-129A-2500W

产品参数 Product parameters

型号 Model number	尺寸 Lamp body dimensions	光源 Light source	光伏板 Photovoltaic panel	电池 Battery
SE-QJ-129B-300W	358*195*50mm	2835灯珠 146珠 SMD 2835, 146 bulbs	301*188mm 6V6W	32650磷酸铁锂 5AH 32650 LiFePO ₄ , 5AH
SE-QJ-129B-600W	454*220*50mm	2835灯珠 292珠 SMD 2835, 292 bulbs	396*212mm 6V8W	32650磷酸铁锂 6AH 32650 LiFePO ₄ , 6AH
SE-QJ-129B-900W	585*210*50mm	2835灯珠 438珠 SMD 2835, 438 bulbs	498*208mm 6V12W	32650磷酸铁锂 10AH 32650 LiFePO ₄ , 10AH
SE-QJ-129B-1200W	719*220*50mm	2835灯珠 584珠 SMD 2835, 584 bulbs	626*212mm 6V15W	32650磷酸铁锂 12AH 32650 LiFePO ₄ , 12AH
SE-QJ-129B-2500W	740*390*93mm	2835灯珠 1168珠 SMD 2835, 1168 bulbs	700*368mm 6V35W	32650磷酸铁锂 30AH 32650 LiFePO ₄ , 30AH
SE-QJ-129B-3000W	790*510*102mm	2835灯珠 1752珠 SMD 2835, 1752 bulbs	756*495mm 6V50W	32650磷酸铁锂 30AH 32650 LiFePO ₄ , 30AH

其他参数 Other parameters

显色指数/CRI	70-80Ra
SMD发光效率/SMD LuminousEfficacy	150-180LM/W
光束角/Beam Ange	70°-140°
控制器效率/ControllerEfficiency	>90%
续航时间/Endurance Time	10-12H
工作温度/WorkingTemperature	-20°C+60°C
防护等级/Protection Rating	IP65/66/67



新农村建设路灯
一体式太阳能路灯

All-in-One Street Light
Infrared remote control

