



PRODUCT CATALOGUE
2026

GLOBAL MANUFACTURING BASE OF LUMINAIRE PRODUCTS

We strive to be the leader in
the industry and the worlds most
respected lighting solution provider.

VACE Lighting

VACE Lighting adopts lean production management mode(JIT), introduces advanced automatic mechanical production equipment to improve the efficiency of production and managerment. With 4RoHs workshops, 2 dust-free SMT workshops and 33 production assembly lines, there are more than 500 staff to reach the monthly productivity of more than 3 million units. VACE Lighting Technology Co., Ltd., with the attitude of pursuing perfection, strictly guarantees quality, and controls product through consistent

process standard and rigorous process. With the integrated industrial chain from LED welding, part forming, surface treatment to assembly, most key components and treatment of VACE Lighting are completed inside. every product must pass more than 20 production processes and inspection procedures which strictly meet the international standard, so as to ensure product precision and quality.

With professional technical level and outstanding social responsibility, our company has successfully passed ISO9001 quality management system, ISO14001 quality management system, and obtained a number of domestic and foreign certifications such as CCC, SAA, CE, CB, UL, etc.

Both the production and product quality meet international standard, and our company is awarded the title of “Quality, Service, Integrity Model Enterprise In LED Industry”, and “Chinese Green Environmental Protection Product”.



Company Certiications

2015 ISO9001 Company Quality Certiication
2015 ISO9001 Company Environ-mental Certiication
Passed the supplier audit of Philips, Landvance and Opple

Product Certiications

CCC、SAA、CE、CB、UL

Management System

Toyota Lean Production Management
Supply Chain Management
Product Life Cycle Management
Manufacturing Execution System
Advanced Planning And Scheduling Management
Just In Time

Our Workshop

Tooling Workshop
Injection Workshop
Hardware Workshop
SMT Workshop
Electronics Workshop
Assembly Workshop



Daily output 80000 pcs
Everyday 3 containers shipout



800 workers
40 assembling lines



One-stop solution provider
85% key components made in house



Various products includes
Ceiling Fan, Ceiling Light,
LED Downlight, Magnetic Light,
Floor Light

ICON INDEX

- 

Vertical Rotation
XX°
- 

Horizontal Rotation
XXX°
- 

Angle Adjustable
±XX°
- 

CCT Adjustable
K K
- 

DALI Dimmable
DALI
- 

0-10V Dimmable
0-10V
- 

Bluetooth Control
Bluetooth
- 

Ingress Protection
IPxx
- 

CRI
CRI≥xx
- 

UGR
UGR≥xx
- 

Beam Angle
xxx°
- 

Voltage
AC
xxx-xxxV
- 

Recessed installation
Recessed
- 

Surface mounted installation
Surface
- 

Pendant installation
Pendant
- 

Wall mounted(Up)
Up
- 


Wall mounted(Down)
Down
- 

Wall mounted(Up&Down)
Up&Down
- 

Track installation
Track

CCT ——— XXXXX XXXXX XXXXX

Color ———  XXXX



LED Module Light Series



LED Tracklight Series




LED Smart Light Series



LED Miniaturised Series



LED Downlight Series




LED Panel Light Series



LED Spotlight Series



LED Linear Light Series



LED Hotel Light Series



LED Strip Light Series




LED Grille Spotlight Series




LED Magnetic Profile
LED System Series

CONTENTS

M10 Super Slim Low Voltage Track

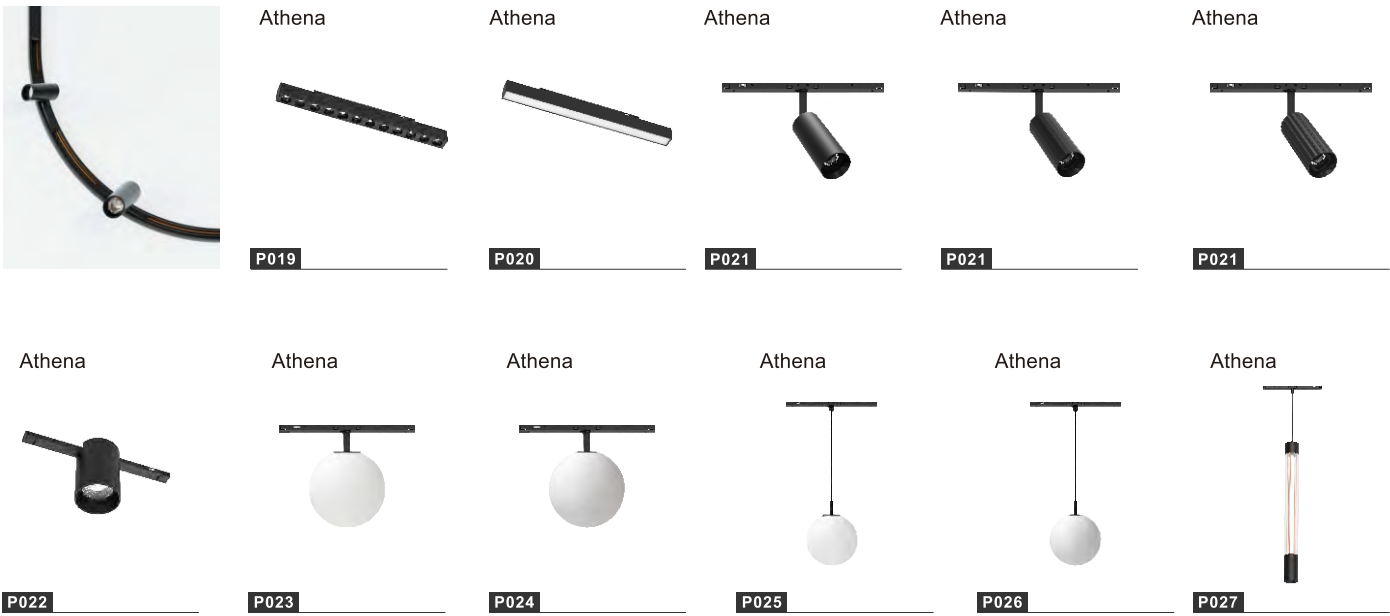

Altas Flexible Magnetic

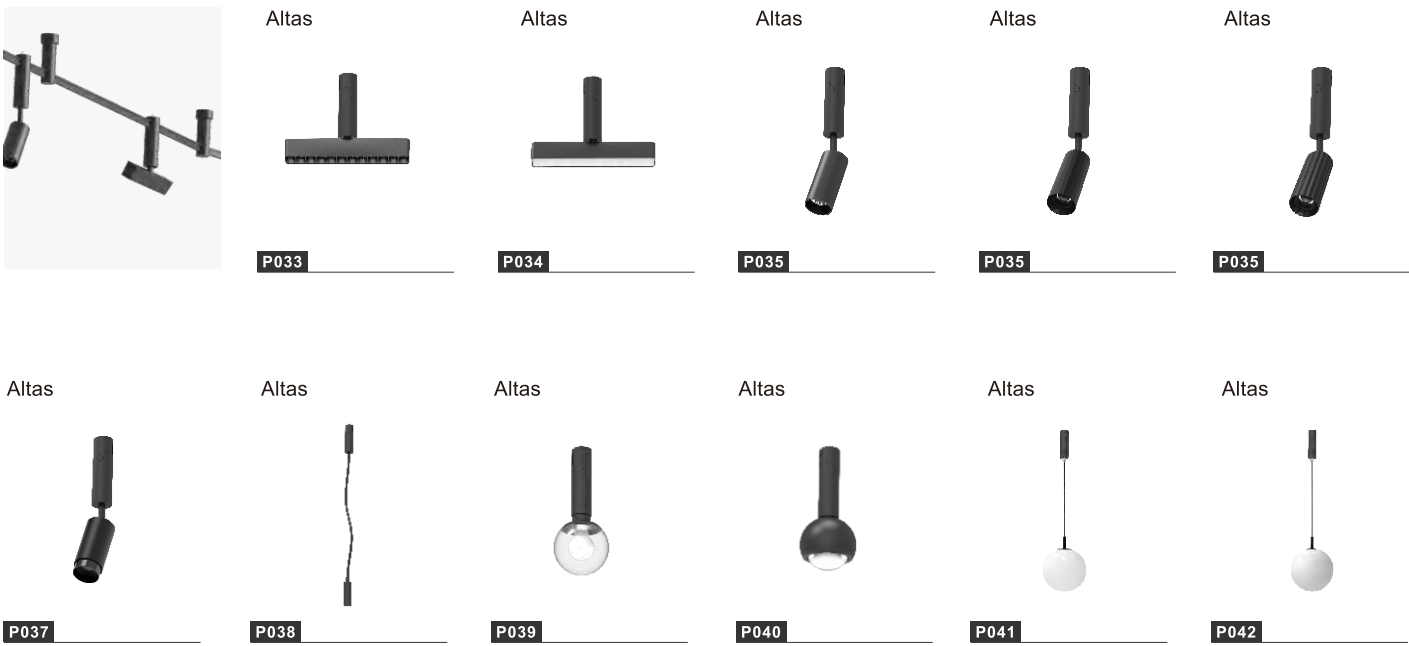

LED Magnetic Profile LED System M30 Ultra-Thin Series



Ultra-thin Mini Series



LED Magnetic Profile LED System

Wisdom



P079

Wisdom



P083

Wisdom



P087

Wisdom



P091

Wisdom



P092

Avin Curved Magnetic



P097


Avin



NEW

P098

Avin



NEW

P099

Avin



NEW

P099

LED Magnetic Profile LED System

Vicky



P103

Vicky



P104

Vicky



P105

Vicky



P106

Vicky



P107

Vicky




P108

Vicky



P109

Garage light / KD light

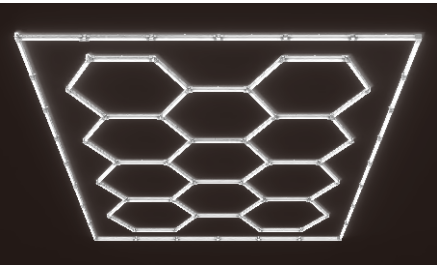

P113

Primate



NEW

P113

Ceiling Light

Tavi-A



IP54



IP54

NEW

P121

Tavi-B



IP54



IP54

NEW

P123

Tavi-C



NEW



P125

Hera



NEW

P127

Bosco



P128

Banila



NEW

IP65

P129

Alva

Double-layer



NEW

P131

Lolana



P133

Varlea



P134

Riva



P135

Riva



P136

Lumino



NEW

P137

LED Downlight Anti-Glare Series

Zona



P141

Zeus



P142

IP54

Bonnie



P143

Celia



P144

Fiona




P145

Bole



P146

Cosmo Series



P151

NEW









LED Downlight Surface mounted&Pendant Series

Tethys



P153

NEW

Tethys



P154

NEW

Crius



P155

Core



P159

Crocs



P161

LED Downlight Integrated Series

Veritas



P163

NEW

Denis



P164

Norman



P165

IP44

Suri



P166

Palco



P167

IP44

Viola



P169

Soma



P170

LED Spotlight

Protean module light



P173

Dolphin



P179

Aura



P181

NEW

Oceanus



P183

NEW

Oceanus



P185

NEW

Oceanus



P186

Hyperion



P187

NEW

Hyperion



P188

IP65

Maya



P189

IP65

Maya



P190

IP65

Maya



P191

IP65

Maya



P192

Flora



P193

Style



P195






LED Grille Spotlight


Owen	Owen	Owen	Owen	Owen	Owen
					
P203	P204	P205	P206	P207	P208
Owen	Owen				
					
P209	P210				

LED Track Light

Furino	Caphis	Migos	Odell	Odell	Koppa
					
P213	P214	P215	P217	P218	P219
Sakura	Sakura	Pallas	Cubus	Smart-T	Smart-T
					
P221	P222	P223	P225	P227	P229

LED Linear Light

Novo	Novo	Novo	Novo	Novo	
					
P236	P237	P238	P239	P240	
Mirada	Mirada	Mirada	Mirada		
					
P241	P242	P243	P244		
Eclat	Serenita	Luna	Ventus	Yaffa	Genoa
					
P245	P247	P249	P250	P251	P252

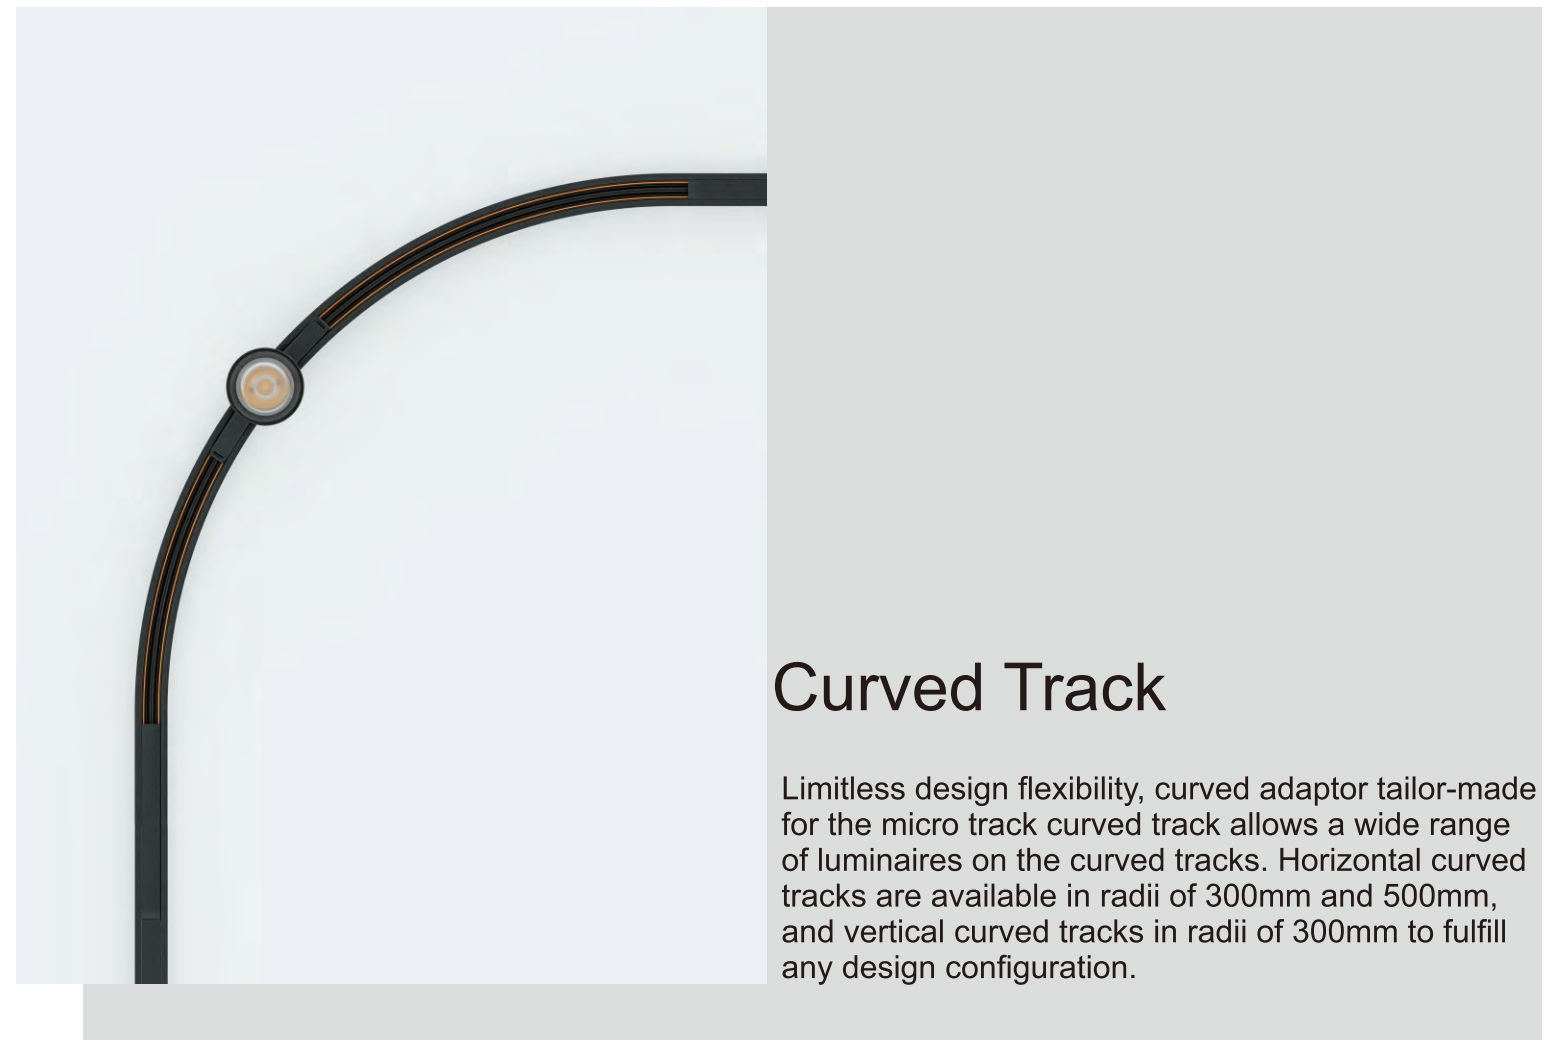

Casambi Dali Wireless Centralized Control


For Micro Track 48V DC Input

Casambi Dali Broadcast offers a cutting-edge solution for controlling wireless luminaires on low-voltage (48V) tracks.


Through Casambi Bluetooth Low Energy (BLE) communication with control apps, all you need is a smartphone or tablet to take charge of your lighting system.

Imagine having complete control over the lighting in your space without the hassle of wiring, control units, or routers. With Casambi Broadcast technology, this dream is now a reality.


Group Configuration -up to 24 luminaires

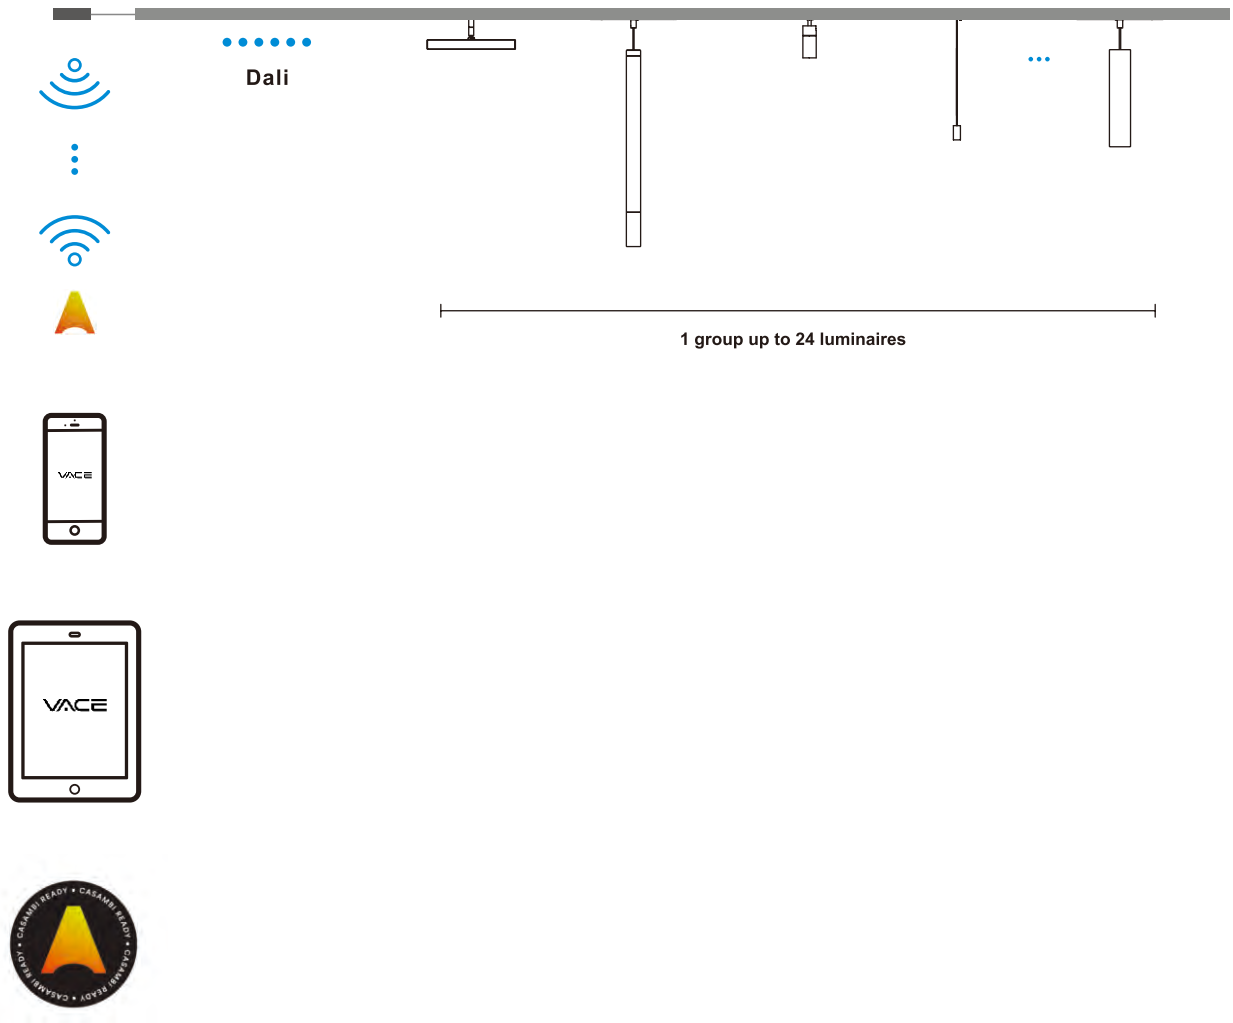

DALI/0-10V Centralized Wire Control

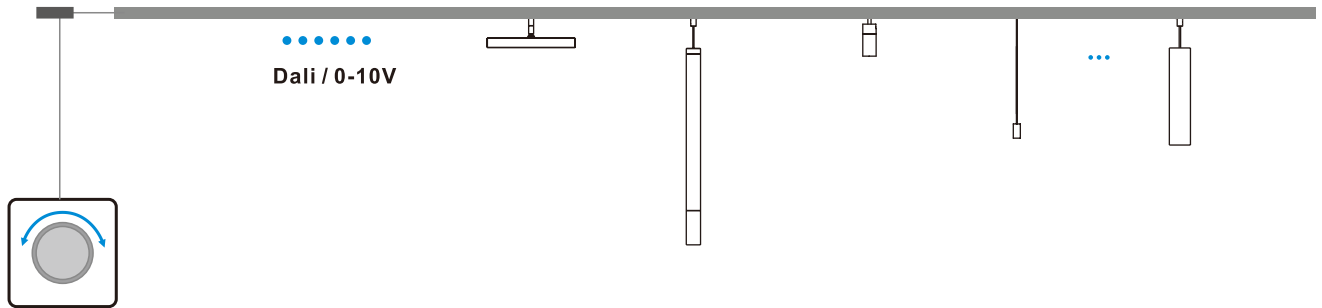


Camambi Smart Individual Control

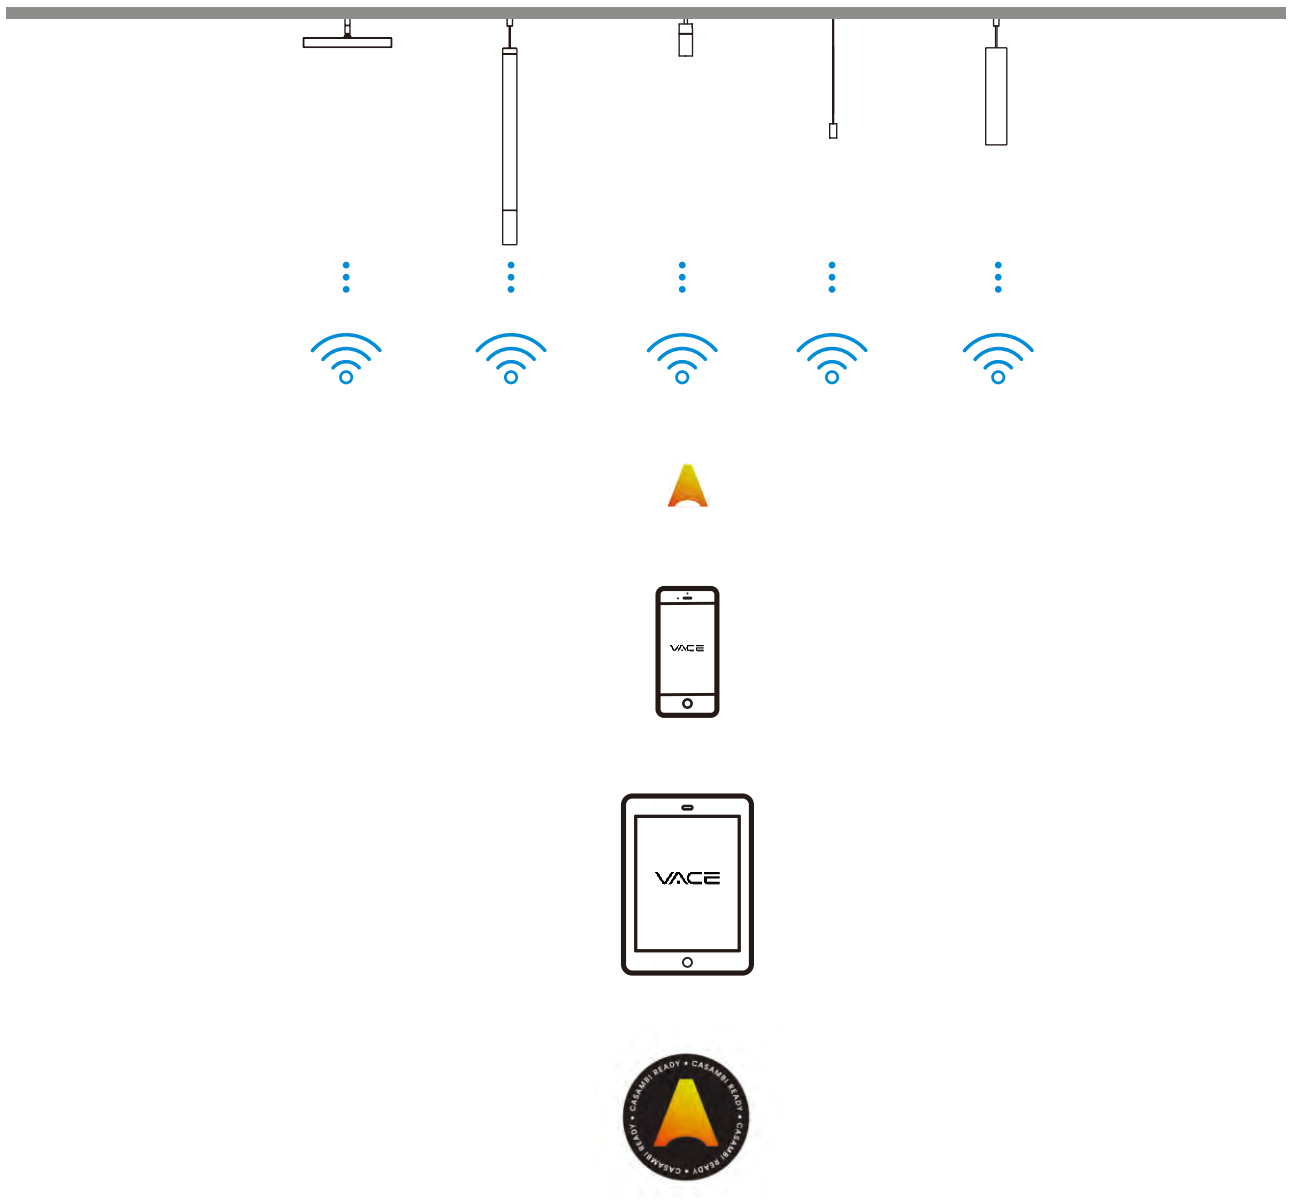



ATHENA Super Slim Magnetic

NEW

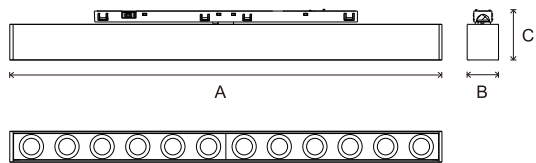

- Athena is Super Slim Low Voltage Track.
- Casambi DALI Broadcast offers a cutting-edge solution for controlling wireless luminaires on low-voltage (48V) tracks.

▶

24°

36°

SMD

IP20

▶

0-10V

DALI

K K

▶

48V

CRI ≥ 90

▶

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8637 301	12W	960	24°/36°	264.4x19x30.2	magnet

CCT

3000K


4000K

6500K

Color


White

Black

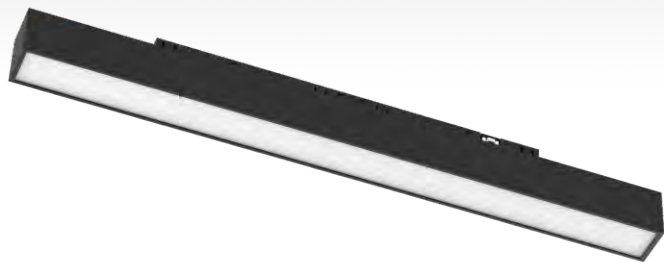

ATHENA Super Slim Magnetic

NEW

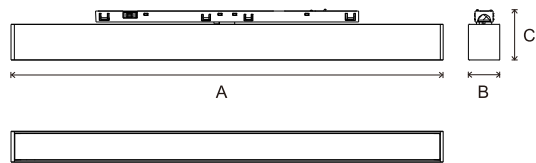

- Athena is Super Slim Low Voltage Track.
- Casambi DALI Broadcast offers a cutting-edge solution for controlling wireless luminaires on low-voltage (48V) tracks.

▶

90°

SMD

IP20

▶

0-10V

DALI

K K

▶

48V

CRI ≥ 90

▶

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8637 302	12W	840	90°	264.4x19x30.2	magnet

CCT

3000K

4000K

6500K

Color

White

Black




8637 304

8637 305

8637 306

ATHENA Super Slim Magnetic

NEW



- Athena is Super Slim Low Voltage Track.
- Casambi DALI Broadcast offers a cutting-edge solution for controlling wireless luminaires on low-voltage (48V) tracks.

▶

24°

36°

IP20

▶

DALI

K K

▶

48V

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8637 304	6W	600	24°/36°	161x139.3xØ40	magnet
8637 305	6W	600	24°/36°	161x139.3xØ40	magnet
8637 306	6W	600	24°/36°	161x139.3xØ40	magnet

CCT

3000K

4000K

6500K

Color


White

Black



ATHENA Super Slim Magnetic

NEW

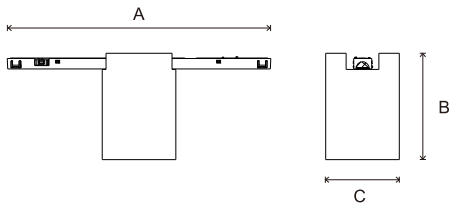

- Athena is Super Slim Low Voltage Track.
- Casambi DALI Broadcast offers a cutting-edge solution for controlling wireless luminaires on low-voltage (48V) tracks.

▶

24°

36°

IP20

▶

DALI

K K

▶

48V

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8637 303	6W	600	24°/36°	161x65xØ45	magnet

CCT

3000K

4000K

6500K


Color

White


Black



ATHENA Super Slim Magnetic NEW



- Athena is Super Slim Low Voltage Track.
- Casambi DALI Broadcast offers a cutting-edge solution for controlling wireless luminaires on low-voltage (48V) tracks.

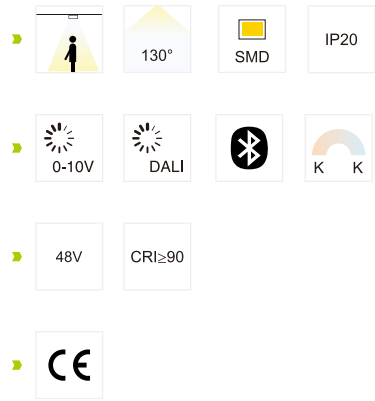


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8637 307	6W	300	130°	Ø100x145.5	magnet
8637 308	6W	300	130°	Ø120x167.4	magnet
8637 309	6W	300	130°	Ø150x199.5	magnet

CCT — 3000K 4000K 6500K


Color — White Black



ATHENA Super Slim Magnetic NEW




- Athena is Super Slim Low Voltage Track.
- Casambi DALI Broadcast offers a cutting-edge solution for controlling wireless luminaires on low-voltage (48V) tracks.

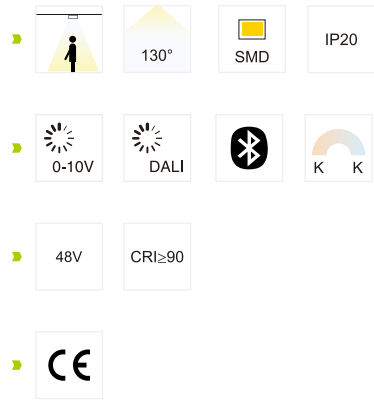


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8637 310	6W	300	130°	Ø100x145.5	magnet
8637 311	6W	300	130°	Ø120x167.4	magnet
8637 312	6W	300	130°	Ø150x199.5	magnet

CCT — 3000K 4000K 6500K


Color — White Black

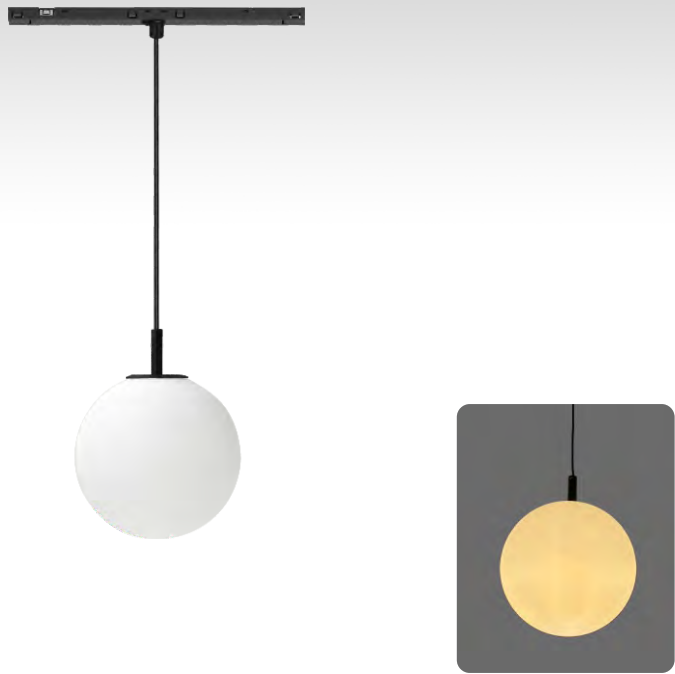

ATHENA Super Slim Magnetic NEW



- Athena is Super Slim Low Voltage Track.
- Casambi DALI Broadcast offers a cutting-edge solution for controlling wireless luminaires on low-voltage (48V) tracks.

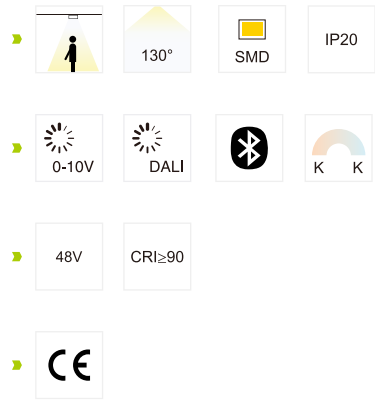


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8637 313	6W	300	130°	Ø100x1645	magnet
8637 314	6W	300	130°	Ø120x1667	magnet
8637 315	6W	300	130°	Ø150x1699	magnet

CCT — 3000K 4000K 6500K


Color — White Black



ATHENA Super Slim Magnetic NEW



- Athena is Super Slim Low Voltage Track.
- Casambi DALI Broadcast offers a cutting-edge solution for controlling wireless luminaires on low-voltage (48V) tracks.

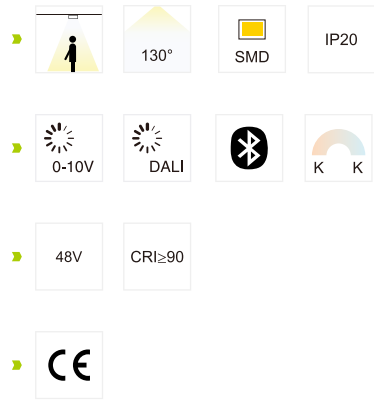


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8637 316	6W	300	130°	Ø100x1645	magnet
8637 317	6W	300	130°	Ø120x1667	magnet
8637 318	6W	300	130°	Ø150x1699	magnet

CCT — 3000K 4000K 6500K

Color — White Black



ATHENA Super Slim Magnetic NEW



- Athena is Super Slim Low Voltage Track.
- Casambi DALI Broadcast offers a cutting-edge solution for controlling wireless luminaires on low-voltage (48V) tracks.

▶

24°

36°

SMD

IP20

▶

0-10V

DALI

Bluetooth

K K

▶

48V

CRI≥90

▶

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8637 319	6W 5W	600 400	24°/36°	Ø36x380x1886.7	magnet

CCT

2200K

3000K

4000K

6500K

Color

White

Black




A modern cylinder pendant LED Light, that offers both classic filament ambient light and modern accent light. LED filament light is designed to resemble a traditional incandescent light bulb with visible filaments for aesthetic and create ambient; the spotlight with multiple beam angle options provides functional accent lighting.

Tracks/Accesorios


Surface-mounted Track

Code: 8637 324 L: 1m





Curved Track

Code: 8637 327

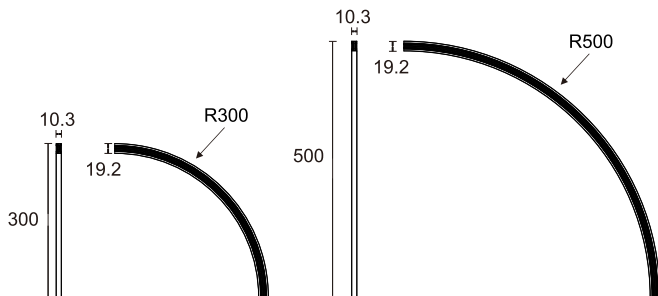


Recessed Track

Code: 8637 325 L: 1m



Corner Curved Track


Code: 8637 328

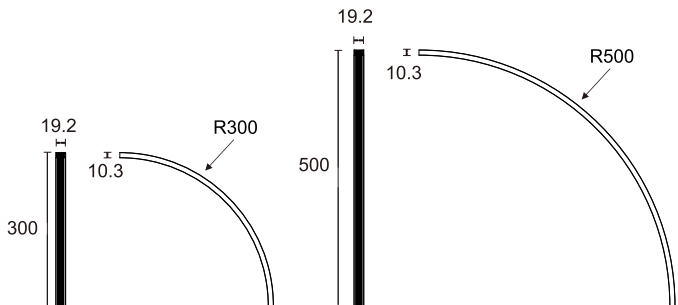

Color  White  Black


Pick-up Head

Code: 8637 329




T-type corner connector

Code: 8637 332

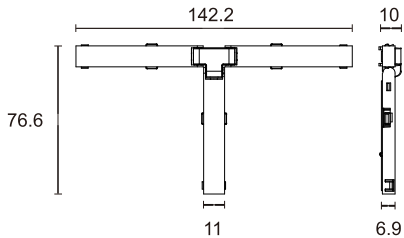


I-type corner connector/
7-word corner connector

Code: 8637 330




X-type corner connector

Code: 8637 333

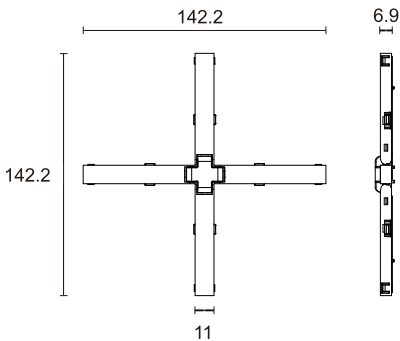


L-type corner connector

Code: 8637 331



Color  White  Black

AITAS Flexible Magnetic

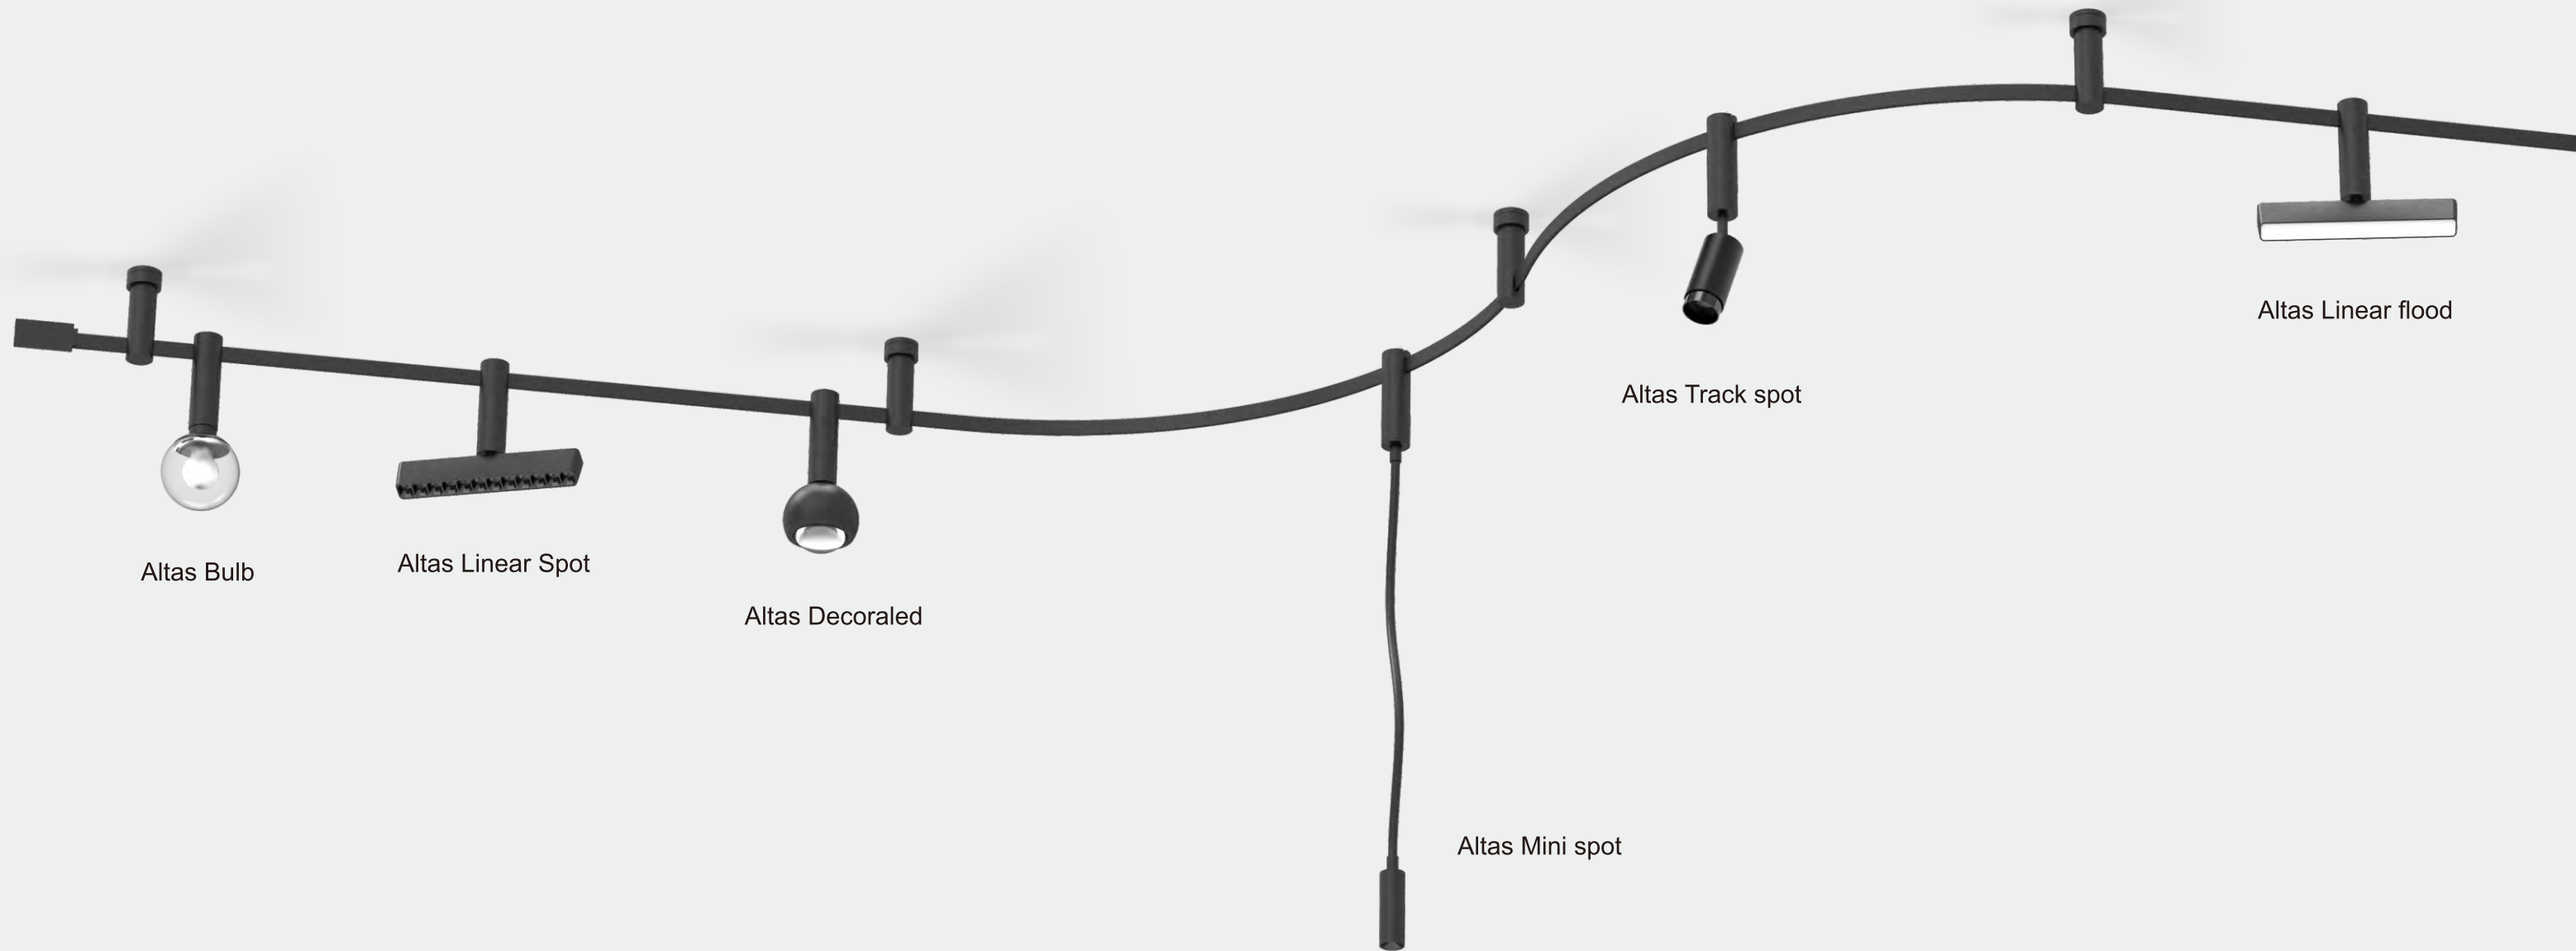

Altas Bulb

Altas Linear Spot

Altas Decoraed


Altas Track spot

Altas Linear flood


Altas Mini spot



Altas Flexible Magnetic NEW



• The same track rail with ALTAS seires is special in the different installation, even if you need to hanging on Serval luminares options for ALTAS will satisfy every personal requirements.

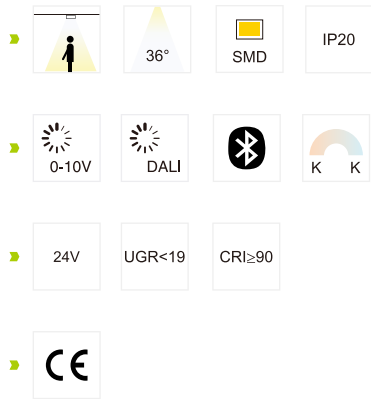


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8617 500	12W	960lm	36°	196x26x143	Track Installation

CCT — 3000K 4000K 6500K


Color — Black



Altas Flexible Magnetic NEW



• The same track rail with ALTAS seires is special in the different installation, even if you need to hanging on Serval luminares options for ALTAS will satisfy every personal requirements.

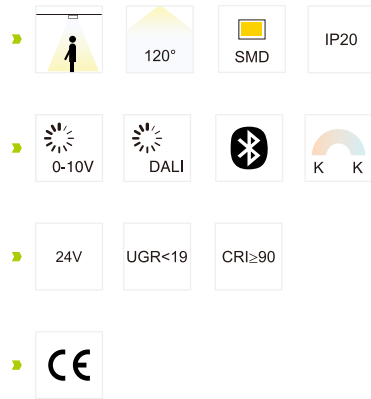

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8617 501	12W	960lm	120°	196x26x143	Track Installation

CCT — 3000K 4000K 6500K

Color — Black



8617 502




8617 503



8617 504

Atlas Flexible Magnetic NEW



• The same track rail with ALTAS seires is special in the different installation, even if you need to hanging on Serval luminares options for ALTAS will satisfy every personal requirements.

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8617 502	6W	480lm	24°/36°	Ø40xØ30x230	Track Installation
8617 503	6W	480lm	24°/36°	Ø40xØ30x230	Track Installation
8617 504	6W	480lm	24°/36°	Ø40xØ30x230	Track Installation

CCT

3000K

4000K

6500K


Color

Black





Atlas Flexible Magnetic NEW



• The same track rail with ALTAS seires is special in the different installation, even if you need to hanging on Serval luminares options for ALTAS will satisfy every personal requirements.

▶

36°

IP20

▶

0-10V

DALI

K

K

▶

24V


UGR<19

CRI≥90

▶



Atlas Flexible Magnetic NEW



• The same track rail with ALTAS seires is special in the different installation, even if you need to hanging on Serval luminares options for ALTAS will satisfy every personal requirements.

▶

36°

IP20

▶

0-10V

DALI

K

K

▶

24V

UGR<19

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8617 508	7W	560lm	36°	ø30xø35.2x215.5	Track Installation

CCT

3000K

4000K

6500K

Color

Black

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8617 505	6W	480lm	36°	ø30xø26x575	Track Installation

CCT

3000K

4000K


6500K

Color

Black



Atlas Flexible Magnetic NEW



• The same track rail with ALTAS seires is special in the different installation, even if you need to hanging on Serval luminares options for ALTAS will satisfy every personal requirements.

▶

120°

IP20

▶

0-10V

DALI

K

K

▶

24V


UGR<19

CRI≥90

▶



Atlas Flexible Magnetic NEW



• The same track rail with ALTAS seires is special in the different installation, even if you need to hanging on Serval luminares options for ALTAS will satisfy every personal requirements.

▶

36°

IP20

▶

0-10V

DALI

K

K

▶

24V

UGR<19

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8617 506	6W	480lm	120°	ø30xø80x200	Track Installation

CCT

3000K

4000K

6500K

Color

Black

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8617 507	6W	480lm	36°	ø30xø80x190	Track Installation

CCT

3000K

4000K


6500K

Color


Black



Atlas Flexible Magnetic NEW

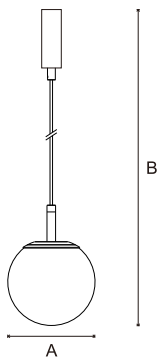

• The same track rail with ALTAS seires is special in the different installation, even if you need to hanging on Serval luminares options for ALTAS will satisfy every personal requirements.

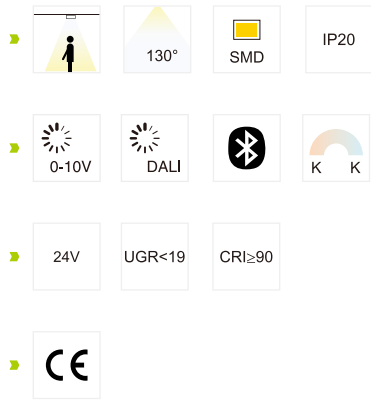


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8617 509	6W	300lm	130°	Ø100x1744.3	Track Installation
8617 510	6W	300lm	130°	Ø120x1766.3	Track Installation
8617 511	6W	300lm	130°	Ø150x1798.3	Track Installation

CCT — 3000K 4000K 6500K


Color — Black



Atlas Flexible Magnetic NEW

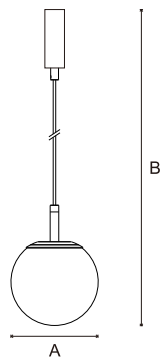

• The same track rail with ALTAS seires is special in the different installation, even if you need to hanging on Serval luminares options for ALTAS will satisfy every personal requirements.

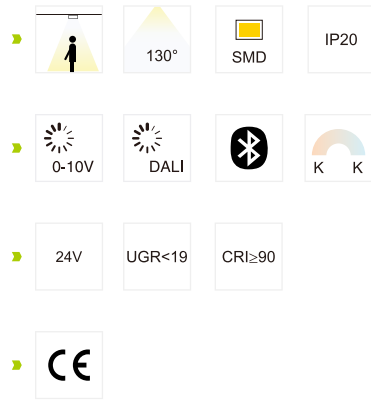

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8617 512	6W	300lm	130°	Ø100x1744.3	Track Installation
8617 513	6W	300lm	130°	Ø120x1766.3	Track Installation
8617 514	6W	300lm	130°	Ø150x1798.3	Track Installation

CCT — 3000K 4000K 6500K

Color — Black



Global Manufacturing Base of Magnetic Products




MAGNETIC PROFILE LED SYSTEM –Series–

- Magnetic absorption lighting system can combine your lighting products according to lighting needs, which can match floodlight line lighting, key line lighting, hanging line decorative lighting, adjustable Angle key lighting, wall washing lighting.
- The different luminaire components are held in place magnetically along the entire track. Installation requires no tools, can be rotated, slid to any position, and adjusted at any time, all with just one hand.

ULRICA Magnetic Profiles


M30 Ultra-Thin Series

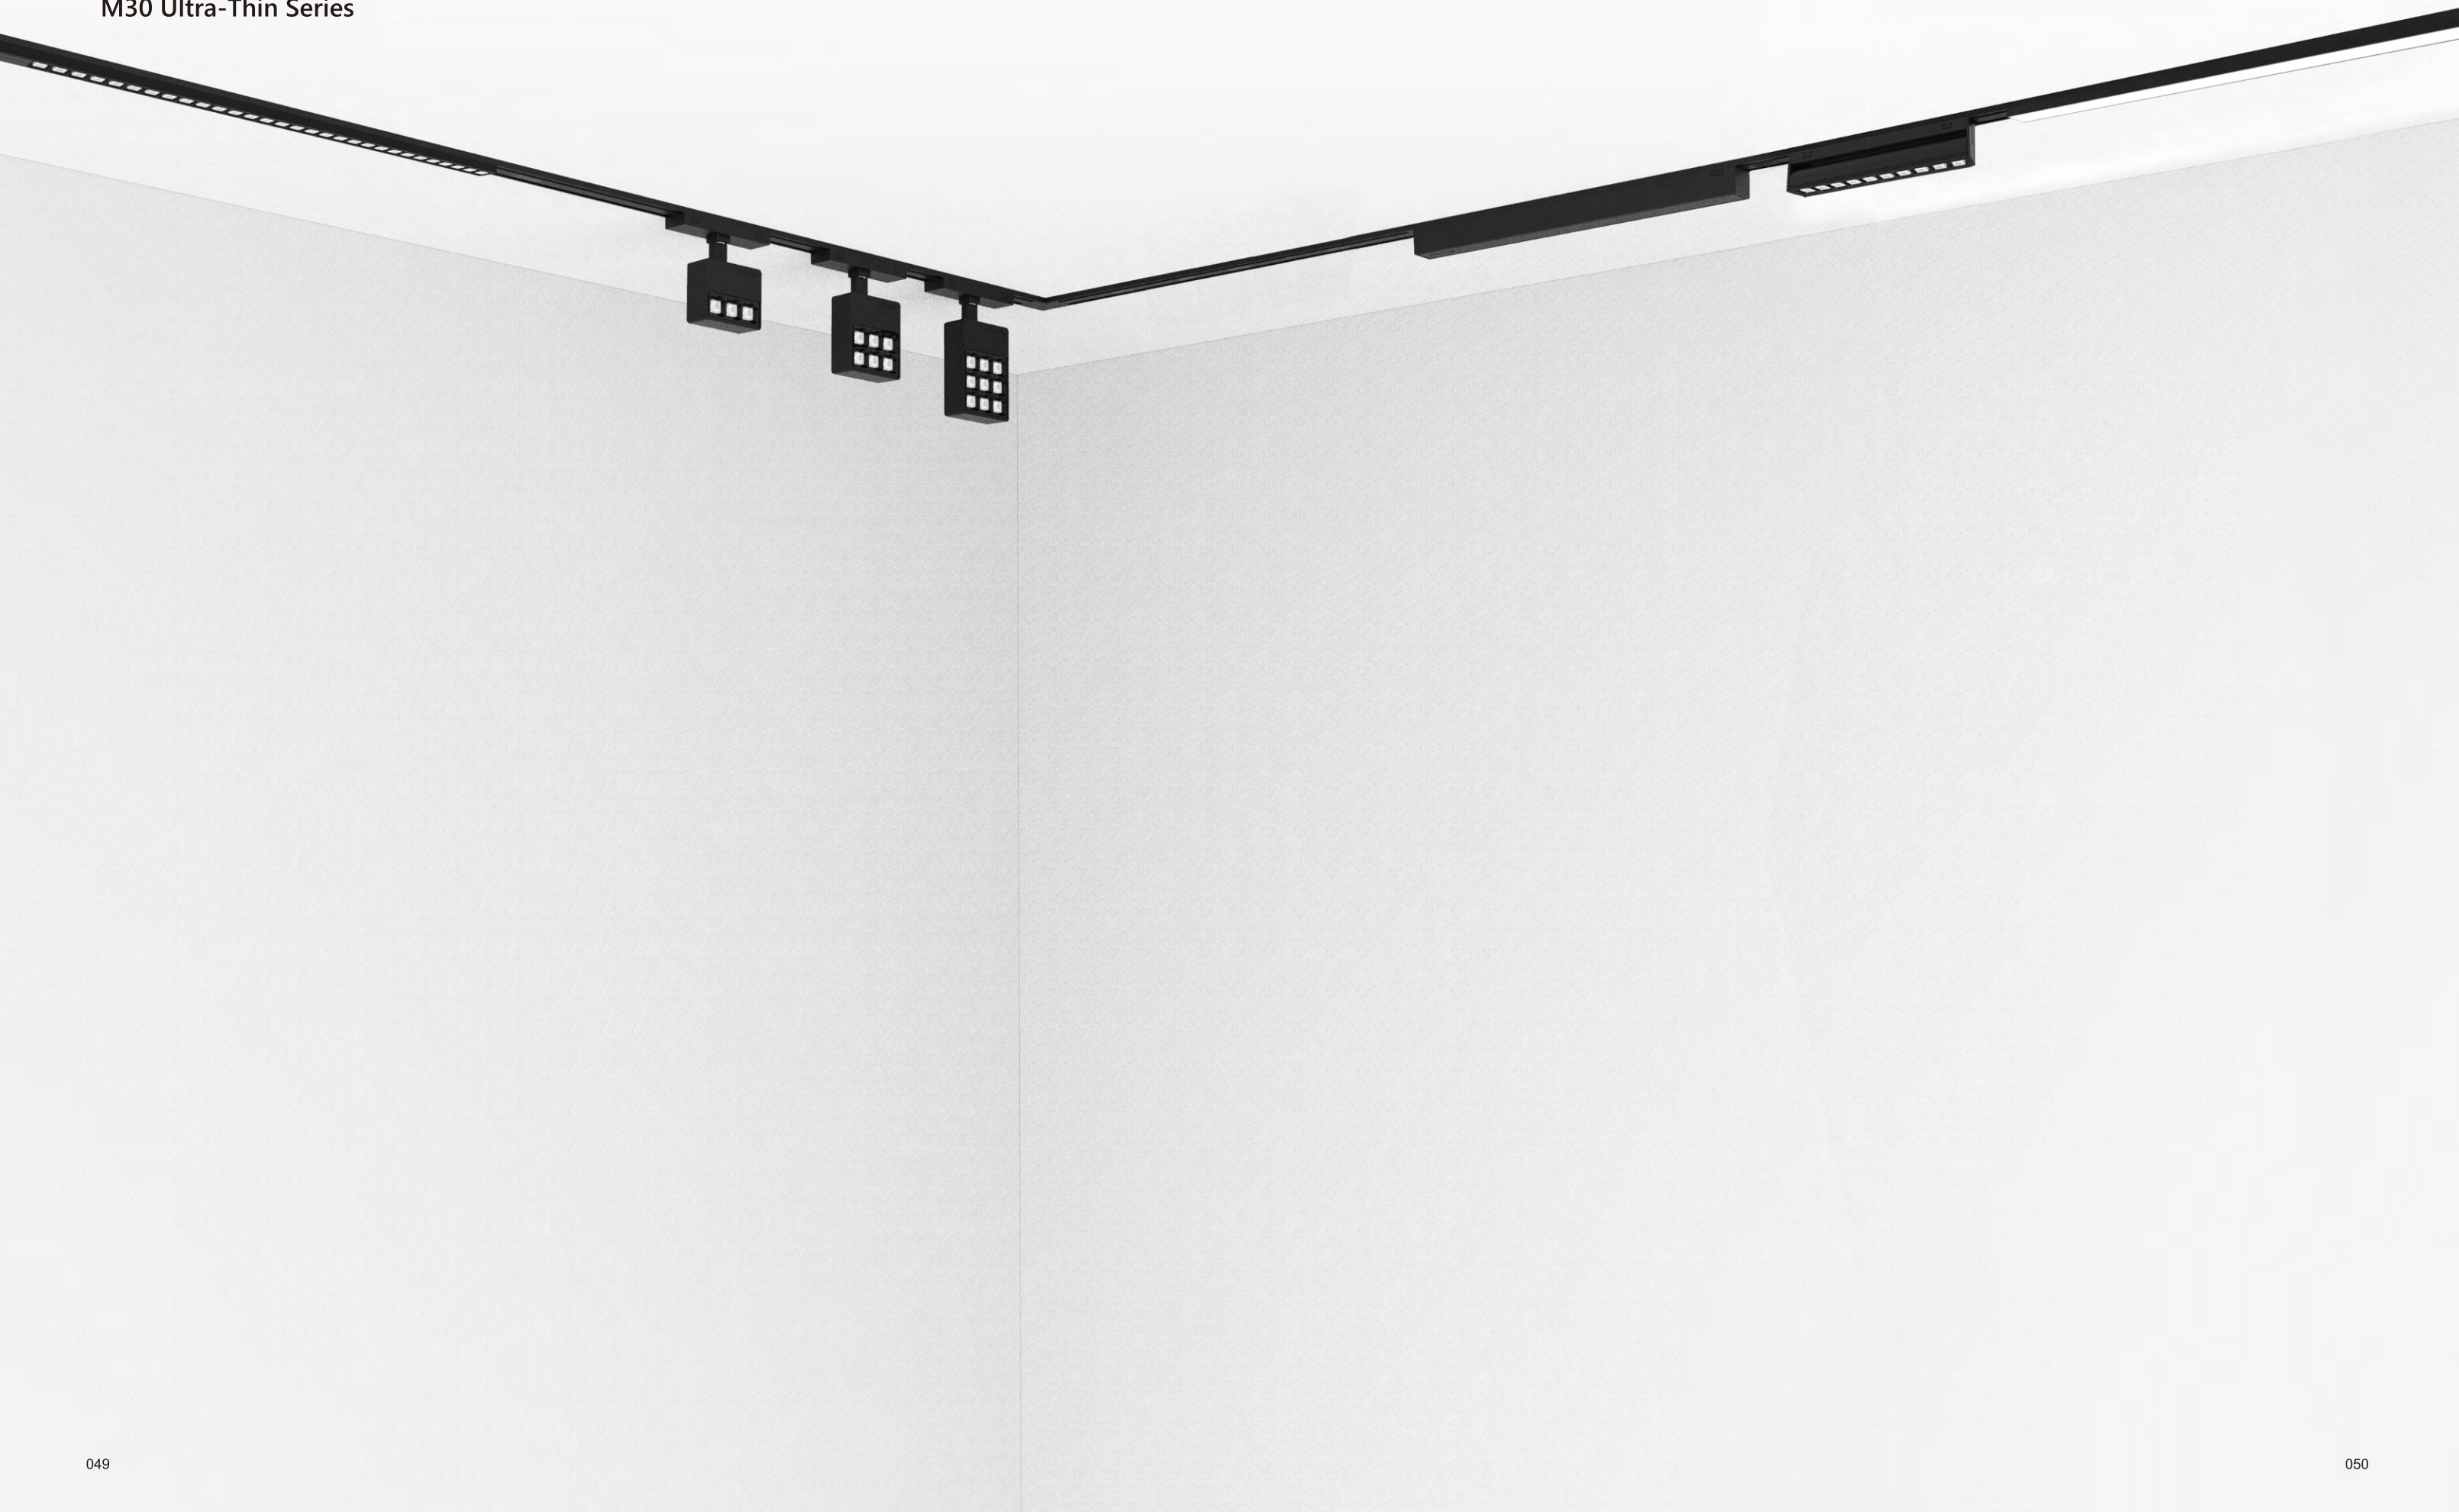



ULRICA

Magnetic profiles

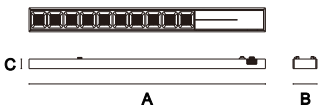

- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Ultra-thin design concept, the lamp body is as thin as 12mm, with various styles and free combinations.

▶

SMD

28°

IP20

▶

0-10V

DALI

Smart Lighting

▶

DC48V

CRI≥90

▶

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 372	8W	420lm	28°	296x30x12	magnet

CCT

Adjustable 2700K-5700K

Color


White

Black



ULRICA

Magnetic profiles



- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Ultra-thin design concept, the lamp body is as thin as 12mm, with various styles and free combinations.

▶

SMD

28°

IP20

▶

0-10V

DALI

Smart Lighting

▶

DC48V

CRI≥90

▶

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 374	15W	900lm	28°	500x30x12	magnet

CCT

Adjustable 2700K-5700K


Color

White

Black



ULRICA Magnetic profiles

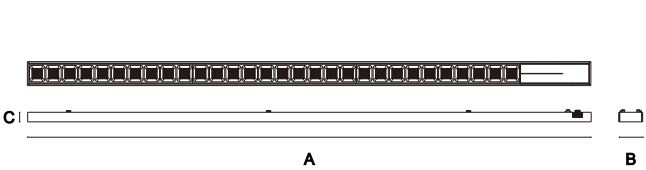

- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Ultra-thin design concept, the lamp body is as thin as 12mm, with various styles and free combinations.

SMD

28°

IP20

0-10V

DALI

Bluetooth

Smart Lighting

DC48V

CRI ≥ 90

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 376	24W	1440lm	28°	705x30x12	magnet

CCT ————

Adjustable 2700K-5700K

Color ————

White


Black





ULRICA

Magnetic profiles



- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Ultra-thin design concept, the lamp body is as thin as 12mm, with various styles and free combinations.









Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 373	8W	420lm	110°	296x30x12	magnet

CCT ———

Adjustable 2700K-5700K

Color ———


White

Black



ULRICA

Magnetic profiles



- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Ultra-thin design concept, the lamp body is as thin as 12mm, with various styles and free combinations.









Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 375	15W	900lm	110°	500x30x12	magnet

CCT ———

Adjustable 2700K-5700K


Color ———

White

Black



ULRICA Magnetic profiles

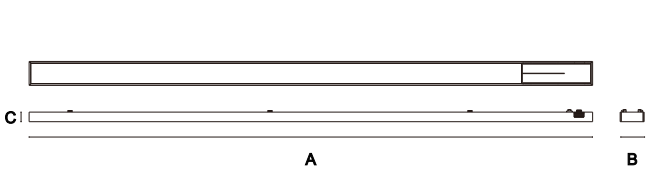

- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Ultra-thin design concept, the lamp body is as thin as 12mm, with various styles and free combinations.

SMD

110°

IP20

0-10V

DALI

Smart Lighting

DC48V

CRI≥90

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 377	24W	1440lm	110°	705x30x12	magnet


CCT

Adjustable 2700K-5700K


Color

White

Black

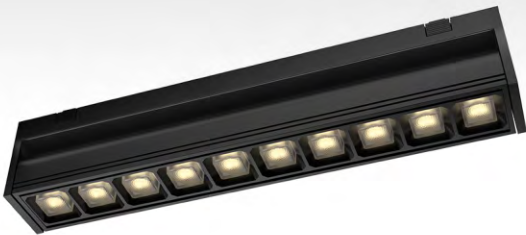

ULRICA Magnetic profiles

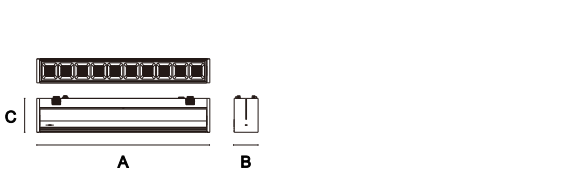

- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Ultra-thin design concept, the lamp body is as thin as 12mm, with various styles and free combinations.

SMD

28°

IP20

0-10V

DALI

Smart Lighting

DC48V

CRI≥90

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 371	12W	780lm	28°	217x30x46	magnet

CCT

Adjustable 2700K-5700K


Color

White


Black



ULRICA Magnetic profiles



- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Ultra-thin design concept, the lamp body is as thin as 12mm, with various styles and free combinations.

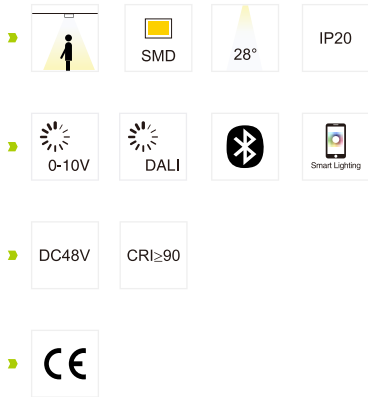


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 380	9W	585lm	28°	120x40.5x156	magnet

CCT ——— Adjustable 2700K-5700K


Color ——— White Black



ULRICA Magnetic profiles



- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Ultra-thin design concept, the lamp body is as thin as 12mm, with various styles and free combinations.

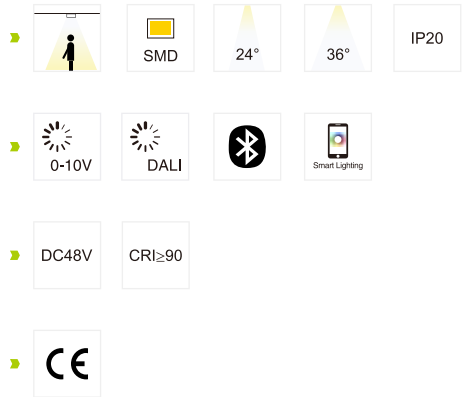

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 401	8W	520lm	24°/36°	Ø44x163.1	magnet

CCT ——— Adjustable 2700K-5700K

Color ——— White Black


Tracks/Accesorios

Surface-mounted Track


Code: 8425 032H L: 0.5m
Code: 8425 040H L: 1m
Code: 8425 033H L: 1.5m




L: 0.5m

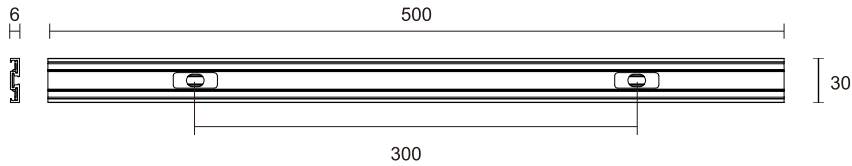

L: 1m

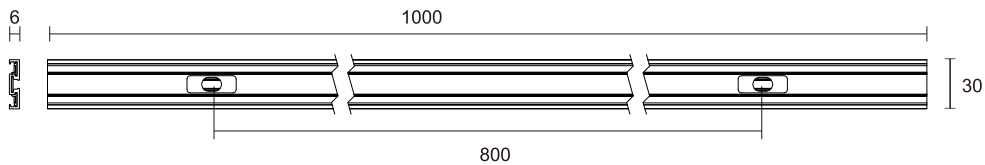


L: 1.5m

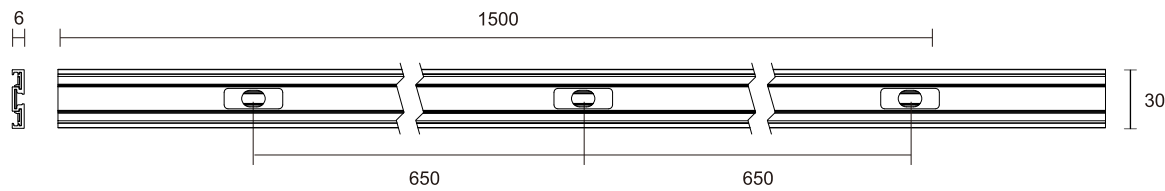

Color  White  Black



I-type
corner connector

Code: 8425 034H




L-type
corner connector

Code: 8425 035H




7-type
corner connector

Code: 8425 038H



T-type
corner connector


Code: 8425 037H




Color  White  Black

TINA Ultra-thin Mini Series



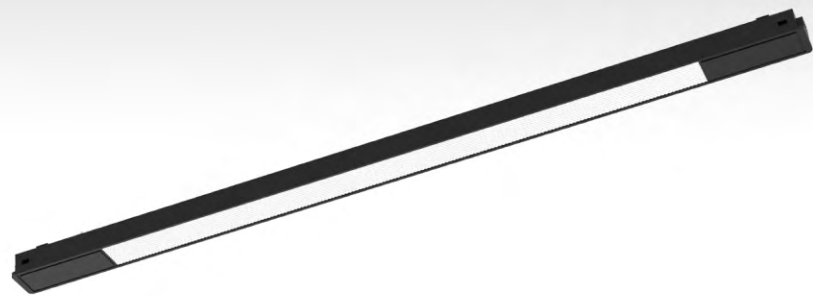

TINA Magnetic profiles



- Safety extra-low voltage 24V output.
- The lamps are 20MM wide and 12mm thick, slim and delicate.
- Ultra-thin guide rail, three ways of installation, can be embedded and installed.
- The lamp adopts the magnetic suction box card key double installation protection, more firm.

▶

SMD

110°

IP20

▶

0-10V

DALI

▶

DC24V

CRI≥90

▶

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 388	10W	600lm	110°	407x20x12	2-circuits

CCT


2700K

4000K


5700K

Color

Black

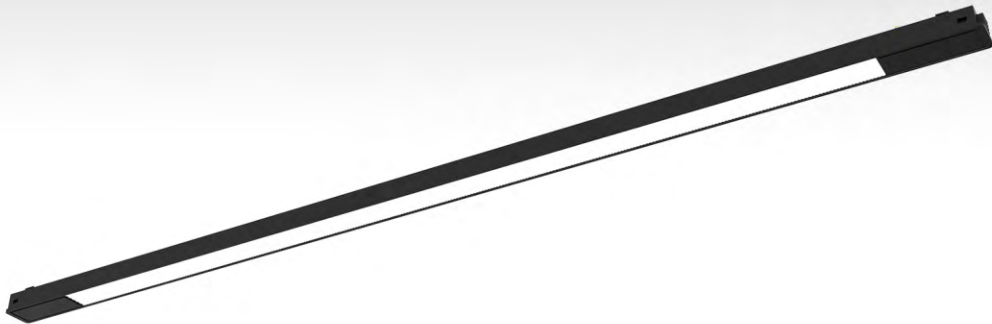

TINA Magnetic profiles



- Safety extra-low voltage 24V output.
- The lamps are 20MM wide and 12mm thick, slim and delicate.
- Ultra-thin guide rail, three ways of installation, can be embedded and installed.
- The lamp adopts the magnetic suction box card key double installation protection, more firm.

▶

SMD

110°

IP20

▶

0-10V

DALI

▶

DC24V

CRI≥90

▶

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 390	18W	1080lm	110°	611x20x12	2-circuits

CCT


2700K

4000K


5700K

Color


Black

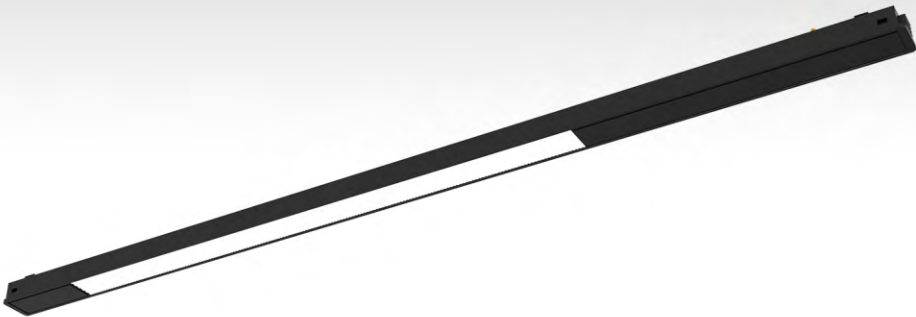

TINA Magnetic profiles




- Safety extra-low voltage 24V output.
- The lamps are 20MM wide and 12mm thick, slim and delicate.
- Ultra-thin guide rail, three ways of installation, can be embedded and installed.
- The lamp adopts the magnetic suction box card key double installation protection, more firm.

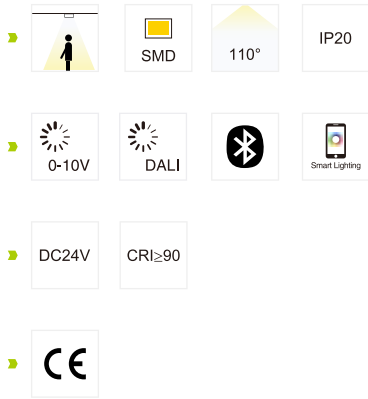


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 388S	10W	800lm	110°	512x20x12	2-circuits

CCT ——— Adjustable 2700K-5700K


Color ——— Black

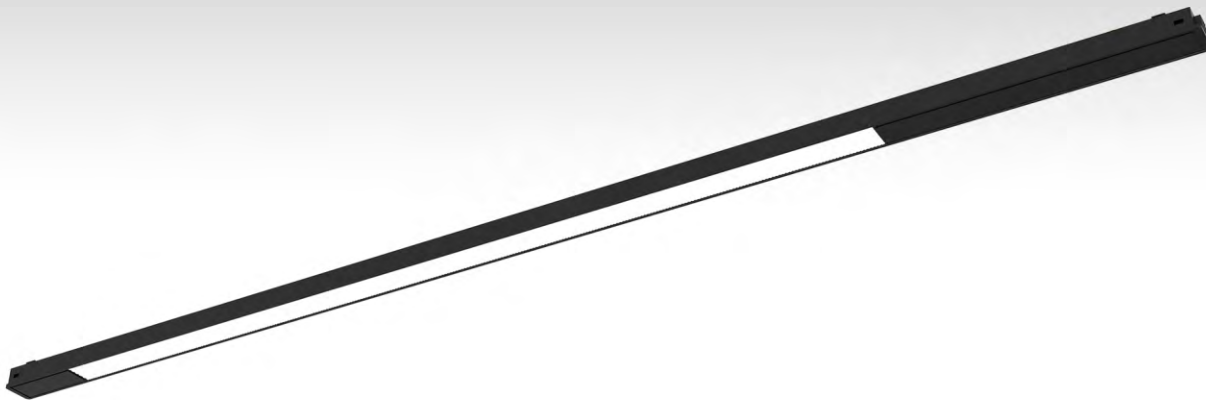

TINA Magnetic profiles



- Safety extra-low voltage 24V output.
- The lamps are 20MM wide and 12mm thick, slim and delicate.
- Ultra-thin guide rail, three ways of installation, can be embedded and installed.
- The lamp adopts the magnetic suction box card key double installation protection, more firm.

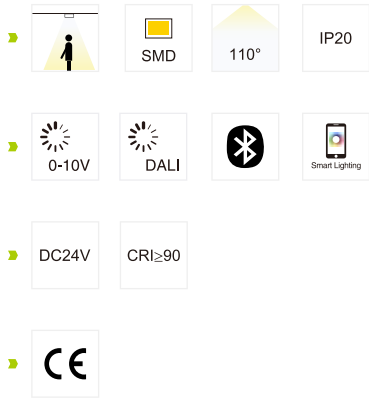


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 390S	18W	1440lm	110°	716x20x12	2-circuits

CCT ——— Adjustable 2700K-5700K

Color ——— Black



TINA Magnetic profiles



- Safety extra-low voltage 24V output.
- The lamps are 20MM wide and 12mm thick, slim and delicate.
- Ultra-thin guide rail, three ways of installation, can be embedded and installed.
- The lamp adopts the magnetic suction box card key double installation protection, more firm.

▶

SMD

28°

IP20

▶

0-10V

DALI

▶

DC24V

CRI≥90

▶

CE


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 387	10W	600lm	28°	407x20x12	2-circuits

CCT ———


Adjustable 2700K-5700K

Color ———

Black

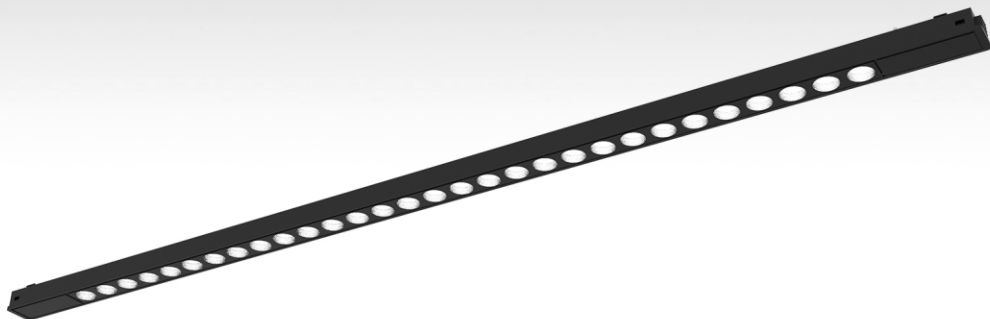

TINA Magnetic profiles



- Safety extra-low voltage 24V output.
- The lamps are 20MM wide and 12mm thick, slim and delicate.
- Ultra-thin guide rail, three ways of installation, can be embedded and installed.
- The lamp adopts the magnetic suction box card key double installation protection, more firm.

▶

SMD

28°

IP20

▶

0-10V

DALI

▶

DC24V

CRI≥90

▶

CE


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 389	18W	1080lm	28°	611x20x12	2-circuits

CCT ———


Adjustable 2700K-5700K

Color ———

Black

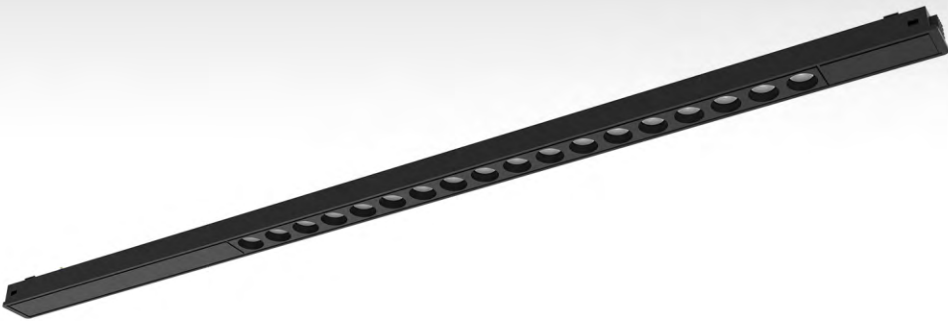

TINA Magnetic profiles



- Safety extra-low voltage 24V output.
- The lamps are 20MM wide and 12mm thick, slim and delicate.
- Ultra-thin guide rail, three ways of installation, can be embedded and installed.
- The lamp adopts the magnetic suction box card key double installation protection, more firm.

▶

SMD

28°

IP20

▶

0-10V

DALI

Smart Lighting

▶

DC24V

CRI≥90

▶

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 387S	10W	800lm	28°	512x20x12	magnet

CCT

2700K

4000K


5700K

Color

Black



TINA Magnetic profiles



- Safety extra-low voltage 24V output.
- The lamps are 20MM wide and 12mm thick, slim and delicate.
- Ultra-thin guide rail, three ways of installation, can be embedded and installed.
- The lamp adopts the magnetic suction box card key double installation protection, more firm.

▶

SMD

28°

IP20

▶

0-10V

DALI

Smart Lighting

▶

DC24V

CRI≥90

▶

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 389S	18W	1440lm	28°	716x20x12	magnet

CCT

2700K

4000K


5700K

Color


Black



TINA Magnetic profiles



- Safety extra-low voltage 24V output.
- The lamps are 20MM wide and 12mm thick, slim and delicate.
- Ultra-thin guide rail, three ways of installation, can be embedded and installed.
- The lamp adopts the magnetic suction box card key double installation protection, more firm.

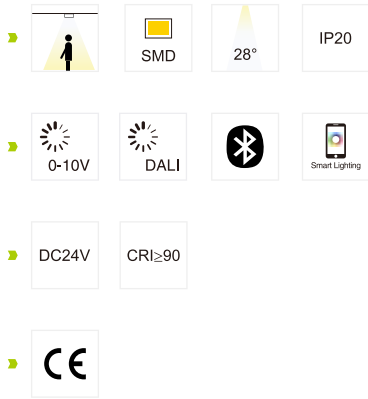


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 386	10W	600lm	28°	222.3x20x36.4	2-circuits
8630 386S	10W	800lm	28°	222.3x20x36.4	2-circuits

CCT — 2700K 4000K 5700K Adjustable 2700K-5700K


Color — Black



TINA Magnetic profiles



- Safety extra-low voltage 24V output.
- The lamps are 20MM wide and 12mm thick, slim and delicate.
- Ultra-thin guide rail, three ways of installation, can be embedded and installed.
- The lamp adopts the magnetic suction box card key double installation protection, more firm.

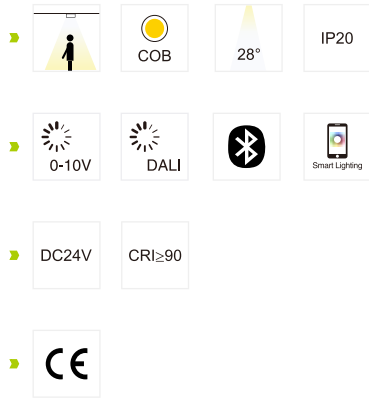

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 391	6W	360lm	28°	Ø35x195.4x123	2-circuits
8630 391S	6W	420lm	28°	Ø35x195.4x123	2-circuits


CCT — 2700K 4000K 5700K Adjustable 2700K-5700K

Color — Black

Tracks/Accesorios


Surface-mounted Track

Code: 8425 105 L: 3m
Code: 8425 106 L: 5m
Code: 8425 107 L: 10m

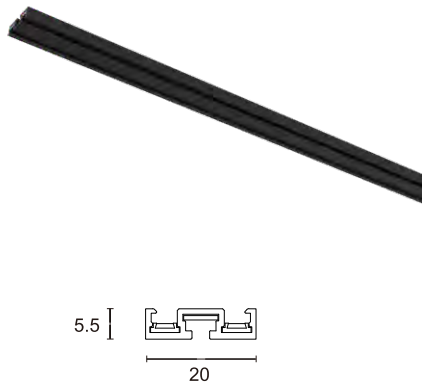


Floating Track

Code: 8425 105 L: 3m
Code: 8425 106 L: 5m
Code: 8425 107 L: 10m

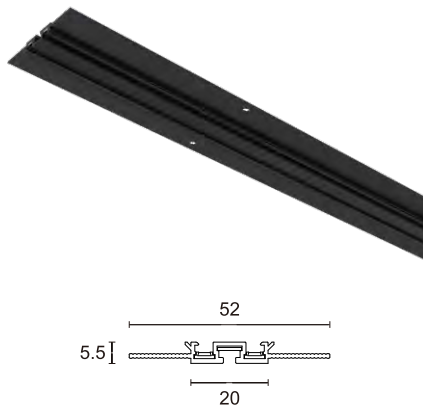


Recessed Track

Code: 8425 105 L: 3m
Code: 8425 106 L: 5m
Code: 8425 107 L: 10m

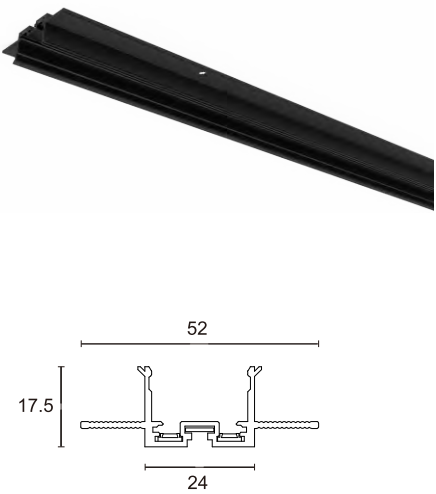

Plastering Track


Code: 8425 105 L: 3m
Code: 8425 106 L: 5m
Code: 8425 107 L: 10m

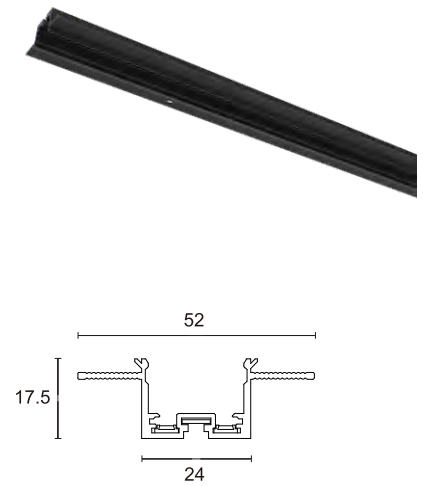

Color ————  Black


All-in-one power supply

6.21.SLAB100W24Z-B4

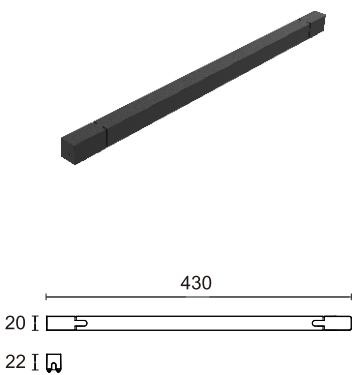


7-type
corner connector
(Surface-mounted)

Code: 8425 114

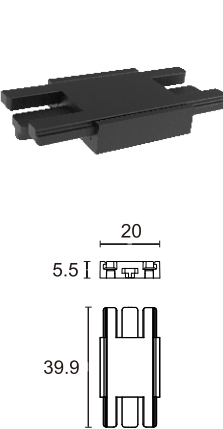


7-type
corner connector
(Surface-mounted)

Code: 8425 114

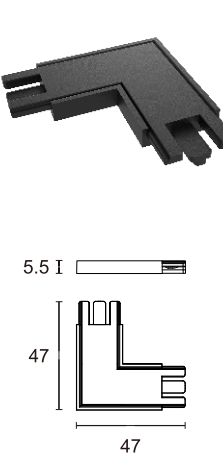


L-type
corner connector
(Surface-mounted)

Code: 8425 111

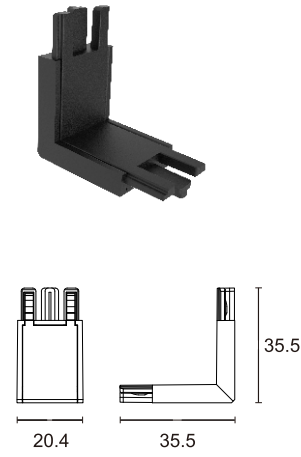


T-type
corner connector
(Surface-mounted)

Code: 8425 112

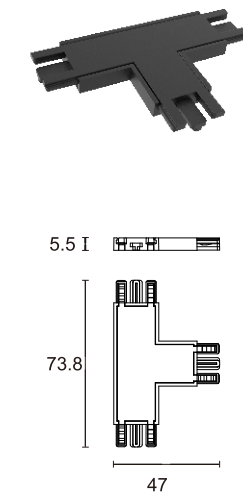


I-type
corner connector
(Recessed Track)

Code: 8425 114

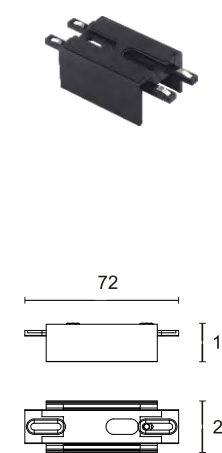


7-type
corner connector
(Recessed Track)

Code: 8425 113

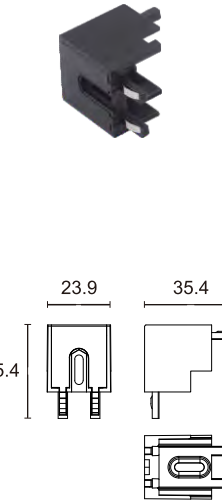


L-type
corner connector
(Recessed Track)

Code: 8425 139

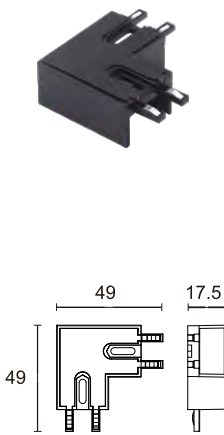

Power pickup head

Code: 8425 120

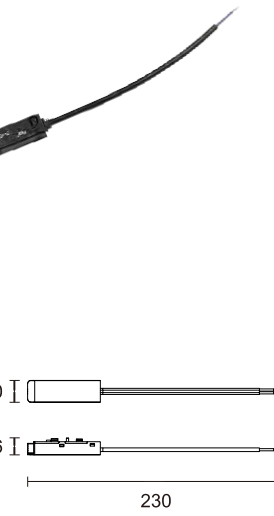

Color ————  Black


WISDOM Magnetic Profiles






PANTENT DESIGN

WISDOM Magnetic profiles

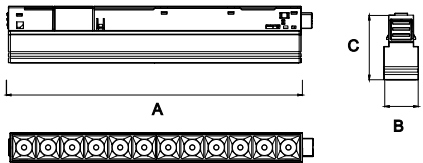

• Extremely simplified, various styles, free combination;
Multiple light emitting modes are optional;
Soft light, no shadows, no spots;
Suitable for all kinds of light environments.

WISDOM Magnetic profiles

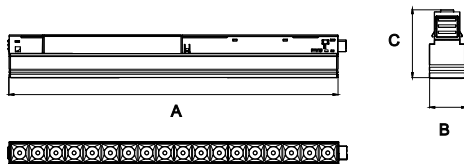

• Extremely simplified, various styles, free combination;
Multiple light emitting modes are optional;
Soft light, no shadows, no spots;
Suitable for all kinds of light environments.

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 351	9W	720lm	24°/ 36°	228x22x43	magnet

CCT ———

Adjustable 2700K-6000K

Color ———

White

Black

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 352	15W	1200lm	24°/ 36°	336x22x43	magnet

CCT ———

Adjustable 2700K-6000K

Color ———


White

Black



WISDOM

Magnetic profiles



• Extremely simplified, various styles, free combination;
Multiple light emitting modes are optional;
Soft light, no shadows, no spots;
Suitable for all kinds of light environments.

▶

▶

▶

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
SM241 063 SM241 064	24W	1728lm	24°	444x23x44	magnet

CCT — 3000K 4000K


Color — White Black





PANTENT DESIGN

WISDOM Magnetic profiles

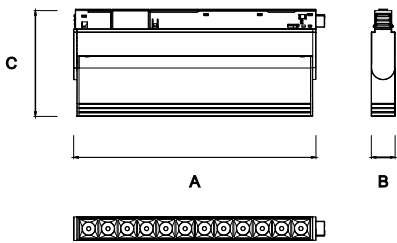

• Extremely simplified, various styles, free combination;
Multiple light emitting modes are optional;
Soft light, no shadows, no spots;
Suitable for all kinds of light environments.



Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 354	9W	720lm	24°/ 36°	235x22x100	magnet


CCT ——— Adjustable 2700K-6000K

Color ——— White Black



PANTENT DESIGN

WISDOM Magnetic profiles

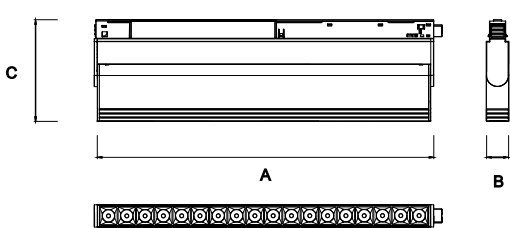

• Extremely simplified, various styles, free combination;
Multiple light emitting modes are optional;
Soft light, no shadows, no spots;
Suitable for all kinds of light environments.



Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 355	15W	1200lm	24°/ 36°	343x22x100	magnet


CCT ——— Adjustable 2700K-6000K

Color ——— White Black



PARENT DESIGN

WISDOM Magnetic profiles

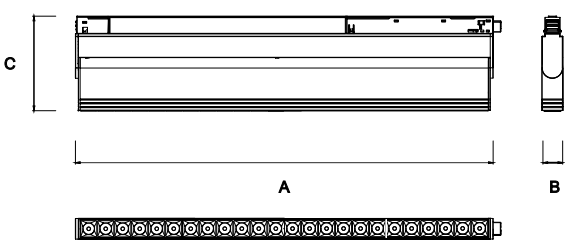

• Extremely simplified, various styles, free combination;
Multiple light emitting modes are optional;
Soft light, no shadows, no spots;
Suitable for all kinds of light environments.

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 356	20W	1600lm	24°/ 36°	451x22x100	magnet

CCT ———

Adjustable 2700K-6000K

Color ———

White


Black





PATENT DESIGN

WISDOM Magnetic profiles

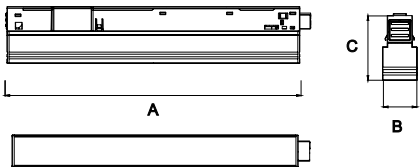


• Extremely simplified, various styles, free combination;
Multiple light emitting modes are optional;
Soft light, no shadows, no spots;
Suitable for all kinds of light environments.



PATENT DESIGN

WISDOM Magnetic profiles

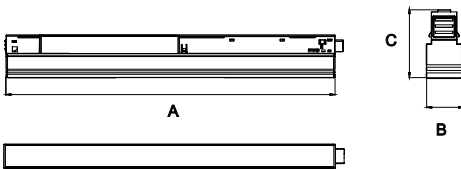

• Extremely simplified, various styles, free combination;
Multiple light emitting modes are optional;
Soft light, no shadows, no spots;
Suitable for all kinds of light environments.

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 357	9W	430lm	110°	228x22x43	magnet

CCT ———

Adjustable 2700K-6000K

Color ———

White

Black

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 358	15W	720lm	110°	336x22x43	magnet

CCT ———

Adjustable 2700K-6000K

Color ———


White

Black



PATENT DESIGN

WISDOM Magnetic profiles

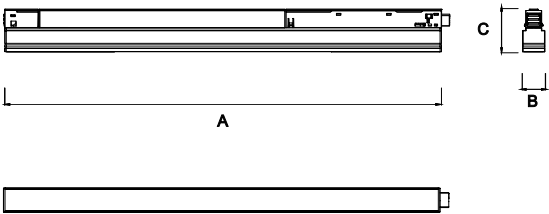

• Extremely simplified, various styles, free combination;
Multiple light emitting modes are optional;
Soft light, no shadows, no spots;
Suitable for all kinds of light environments.



Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 359	20W	960lm	110°	444x22x43	magnet


CCT ——— Adjustable 2700K-6000K

Color ——— White Black




PATENT DESIGN

WISDOM Magnetic profiles



• Extremely simplified, various styles, free combination;
Multiple light emitting modes are optional;
Soft light, no shadows, no spots;
Suitable for all kinds of light environments.

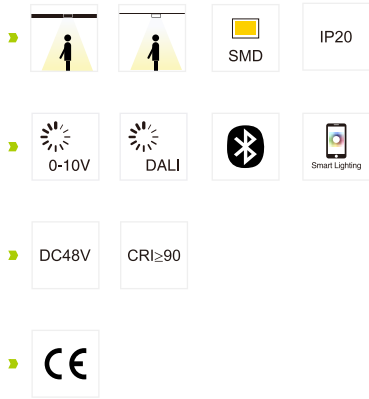

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 437	20W	1200lm	110°	250x250x43	magnet


CCT ——— Adjustable 2700K-6000K

Color ——— White Black



PANTENT DESIGN

WISDOM Magnetic profiles



• Extremely simplified, various styles, free combination;
Multiple light emitting modes are optional;
Soft light, no shadows, no spots;
Suitable for all kinds of light environments.

IP20

COB

0-10V

DALI

DC48V


CRI≥90

CE



PANTENT DESIGN

WISDOM Magnetic profiles



• Extremely simplified, various styles, free combination;
Multiple light emitting modes are optional;
Soft light, no shadows, no spots;
Suitable for all kinds of light environments.

IP20

COB

0-10V

DALI

DC48V

CRI≥90

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 360	12W	960lm	10°/ 24°/ 36°	Ø42x125x114	magnet

CCT

Adjustable 2700K-6000K

Color

White

Black

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8630 361	9W	720lm	10°/ 24°/ 36°	Ø42x350	magnet

CCT

Adjustable 2700K-6000K

Color


White

Black

Tracks/Accesorios


Surface-mounted Track

Code: 8427 022 L: 1m
Code: 8427 023 L: 2m
Code: 8427 171 L: 3m





Recessed Track

Code: 8427 019 L: 1m
Code: 8427 020 L: 2m
Code: 8427 170 L: 3m




All-in-one power supply

6.21.WR-CXHY-150W-48V3A

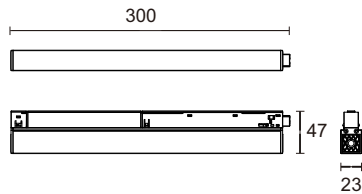


Power pickup head

Code: 8427 098





L-type
corner connector
(Surface-mounted)

Code: 8427 027




7-type
corner connector
(Surface-mounted)

Code: 8427 026




L-type
corner connector
(Recessed Track)

Code: 8427 025




7-type
corner connector
(Recessed Track)

Code: 8427 024




L-type
Corner pickups

Code: 8427 096




I-type
Corner pickups

Code: 8427 097



Color White Black

Color White Black

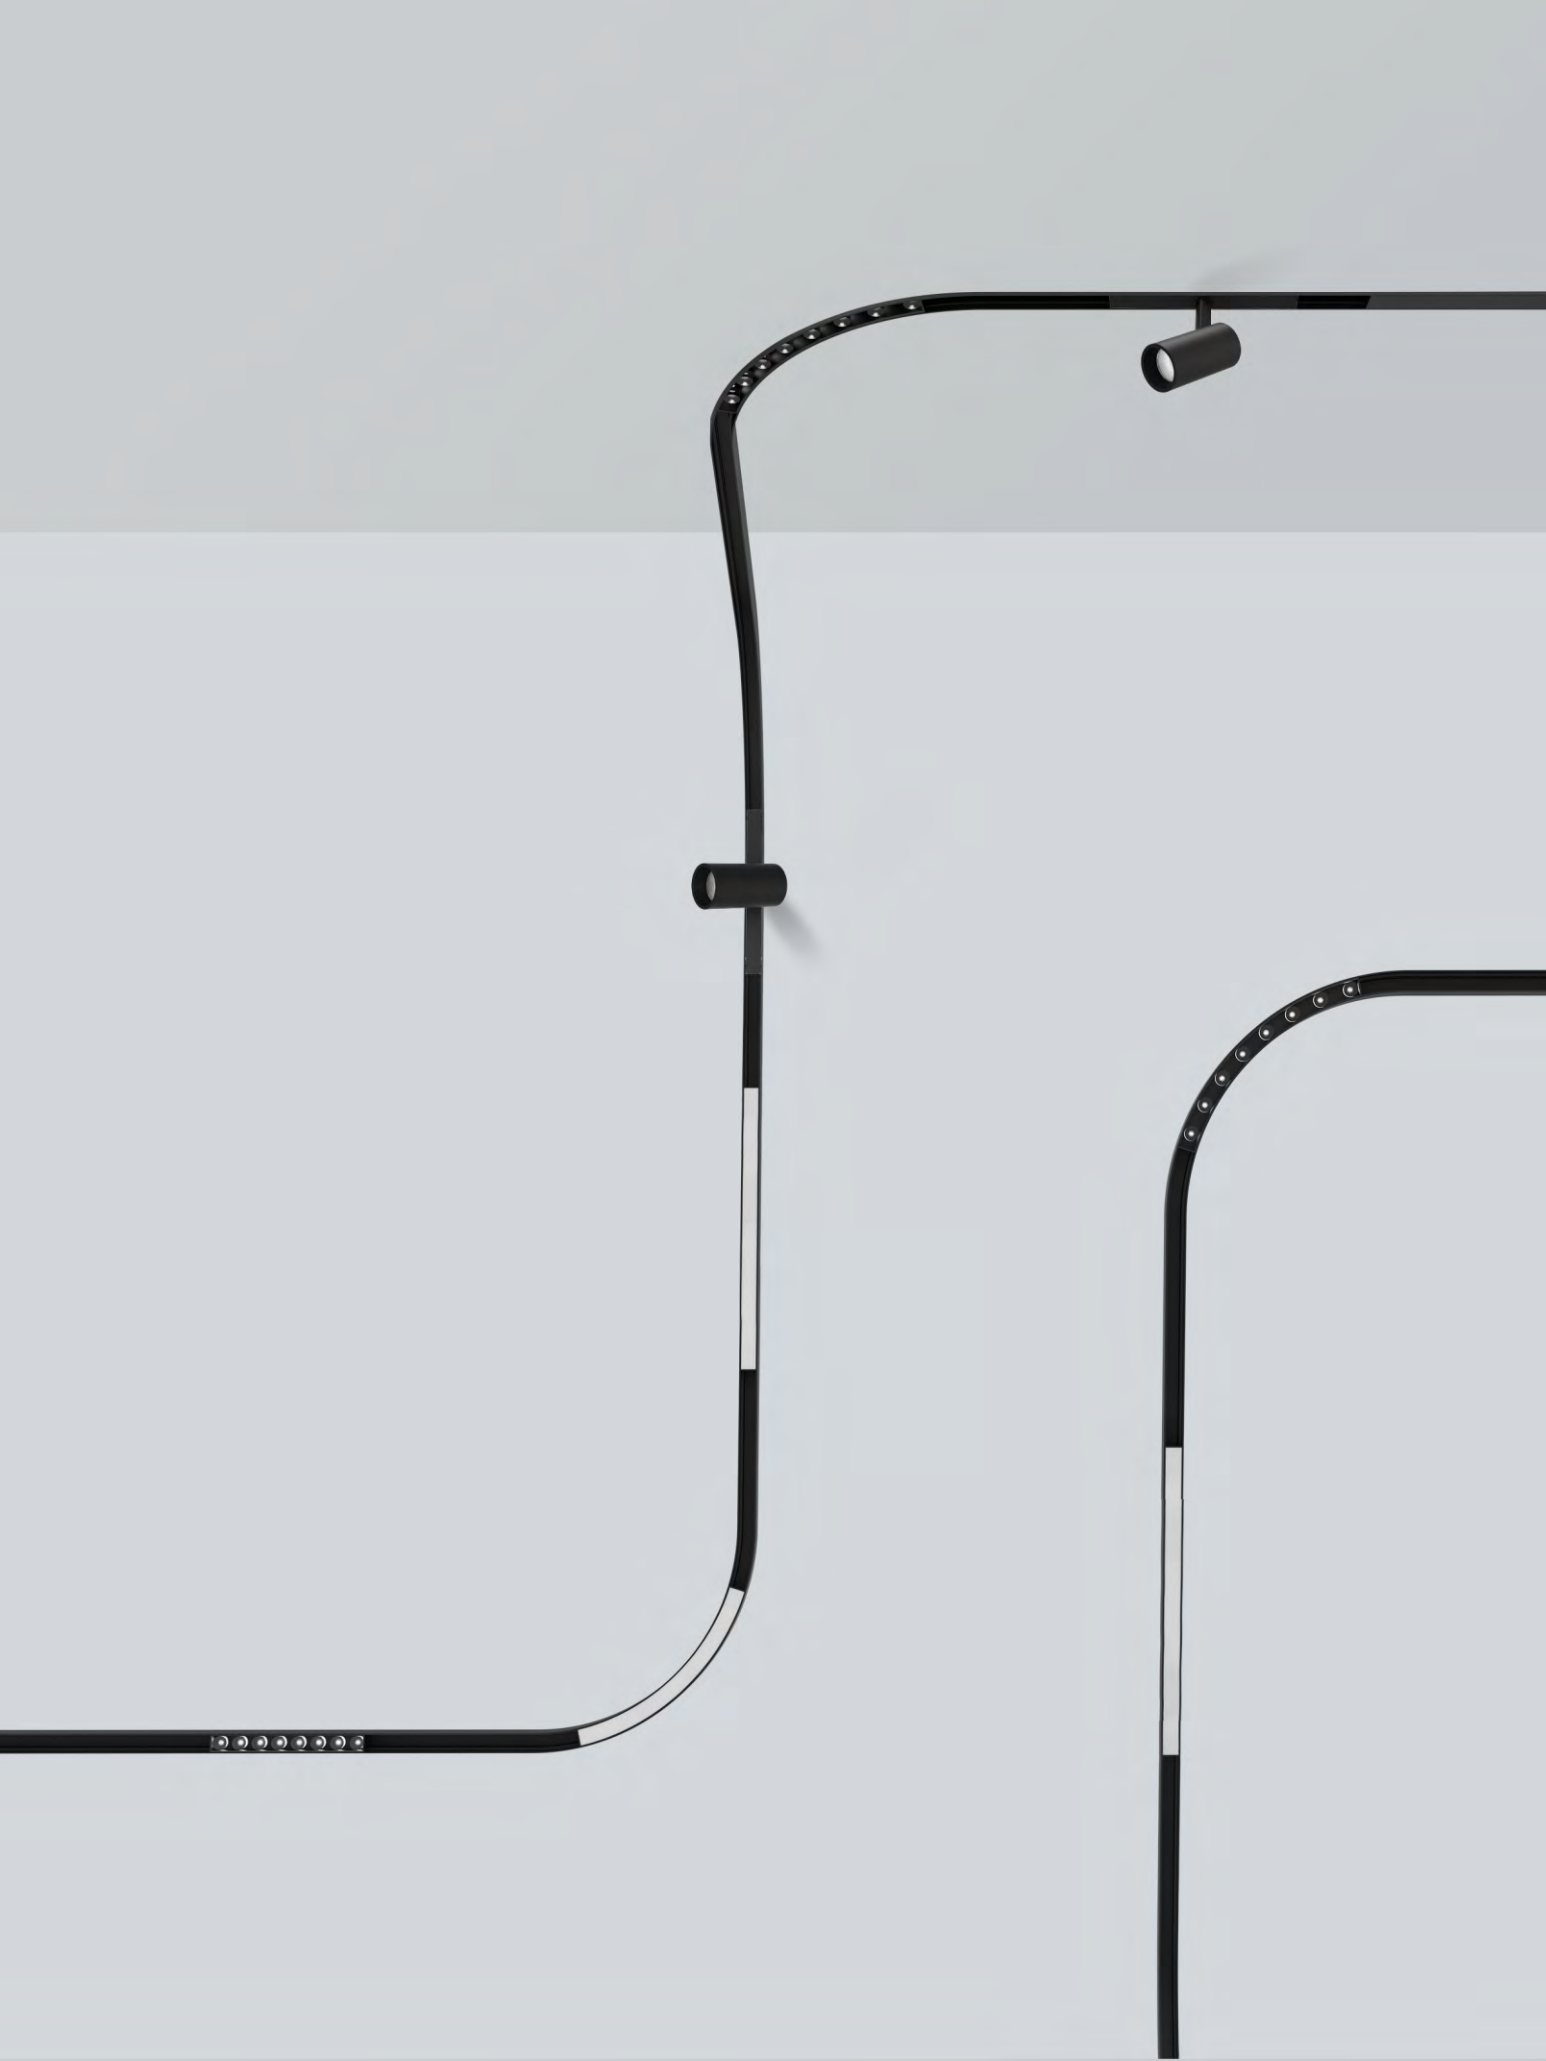


Minimum Radian: R300

AVIN NEW


Curved Magnetic

The series has different sizes of floodlights, grille lights and spotlights. It can be freely put on the track with different curvature.




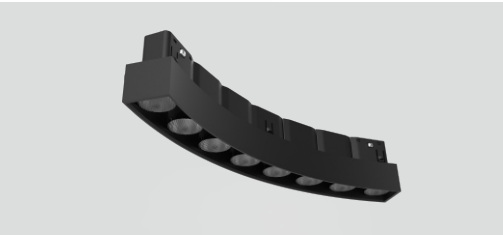

AVIN Curved Magnetic NEW

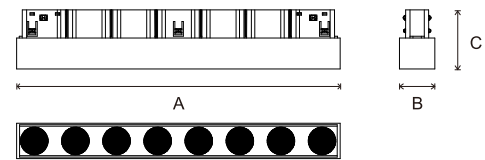



- The series has different sizes of floodlights, grille lights and spotlights.
- It can be freely put on the track with different curvature.

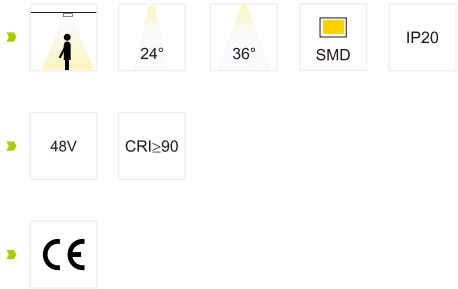


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8820 103	8W	640	24°/36°	219.6x24x40.1	magnet
8820 104	16W	1280	24°/36°	433.2x24x40.1	magnet

CCT — 3000K 4000K 6500K


Color — White Black

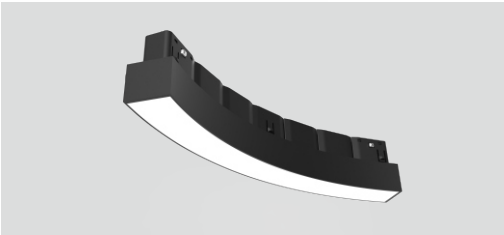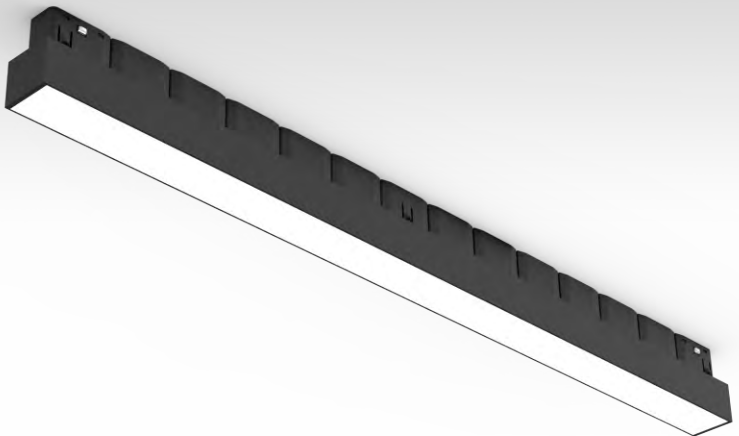

AVIN Curved Magnetic NEW

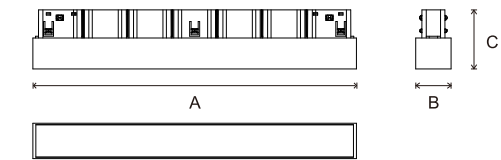

- The series has different sizes of floodlights, grille lights and spotlights.
- It can be freely put on the track with different curvature.

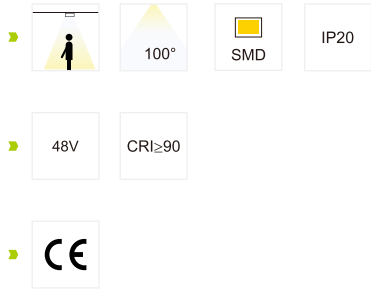


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8820 101	8W	360	100°	219.6x24x40.1	magnet
8820 102	16W	720	100°	433.2x24x40.1	magnet

CCT — 3000K 4000K 6500K

Color — White Black



AVIN Curved Magnetic NEW

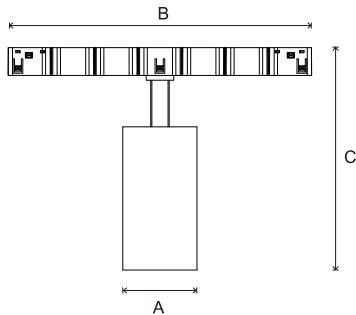

- The series has different sizes of floodlights, grille lights and spotlights.
- It can be freely put on the track with different curvature.

24°

36°

SMD

IP20

48V

CRI≥90

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8820 105	8W	680	24°/36°	Ø48x216x164.1	magnet
8820 106	12W	1020	24°/36°	Ø48x216x164.1	magnet
8820 107	16W	1360	24°/36°	Ø58x216x194.1	magnet

CCT

3000K

4000K

6500K

Color


White

Black




VICKY Magnetic Profiles



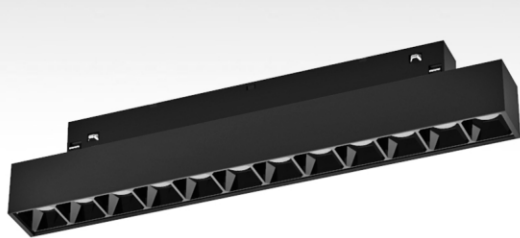

VICKY Magnetic profiles



- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Control switch and dimming color adjustment individually or in groups to meet the needs of different scenes.

SMD

24°

36°

IP20

0-10V

DALI

Smart Lighting

DC48V

CRI≥90

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 353	8W	480lm	24° / 36°	220x22x43	magnet


CCT

Adjustable 2700K-5700K


Color

White

Black

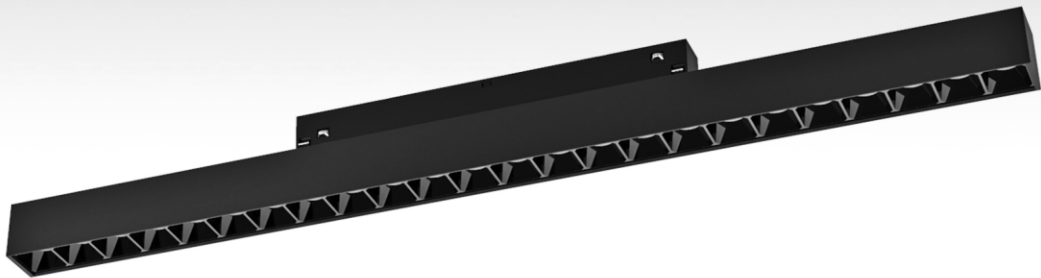

VICKY Magnetic profiles

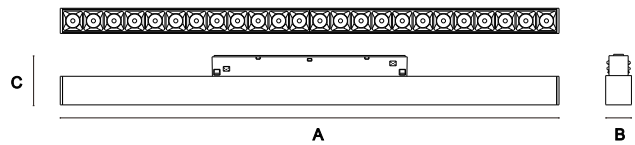

- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Control switch and dimming color adjustment individually or in groups to meet the needs of different scenes.

SMD

24°

36°

IP20

0-10V

DALI

Smart Lighting

DC48V

CRI≥90

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 355	15W	900lm	24° / 36°	436x22x43	magnet


CCT

Adjustable 2700K-5700K

Color


White

Black

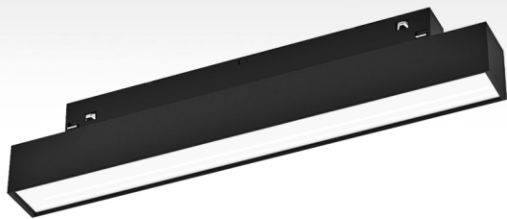

VICKY

Magnetic profiles



- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Control switch and dimming color adjustment individually or in groups to meet the needs of different scenes.

SMD

110°

IP20

0-10V

DALI

Smart Lighting

DC48V

CRI≥90

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 350	8W	480lm	110°	220x22x44	magnet

CCT

Adjustable 2700K-5700K

Color


White

Black



VICKY

Magnetic profiles

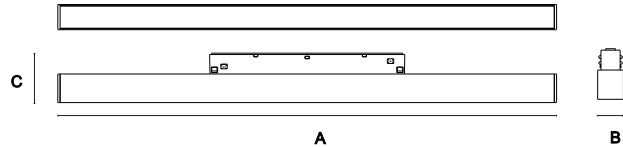

- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Control switch and dimming color adjustment individually or in groups to meet the needs of different scenes.

SMD

110°

IP20

0-10V

DALI

Smart Lighting

DC48V

CRI≥90

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 352	15W	900lm	110°	436x22x44	magnet

CCT

Adjustable 2700K-5700K


Color

White


Black



VICKY Magnetic profiles



- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Control switch and dimming color adjustment individually or in groups to meet the needs of different scenes.

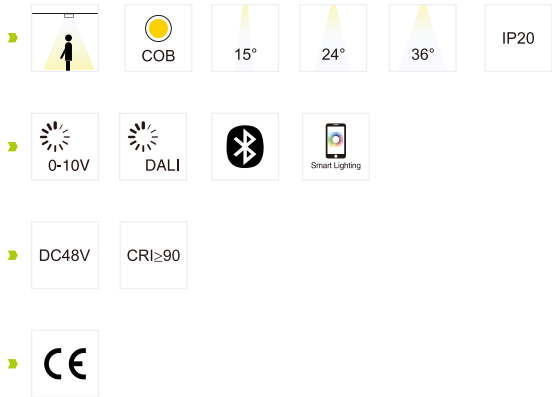


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 343	8W	480lm	15° / 24° / 36°	Ø44x143x108	magnet

CCT ——— Adjustable 2700K-5700K


Color ——— White Black



VICKY Magnetic profiles



- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Control switch and dimming color adjustment individually or in groups to meet the needs of different scenes.

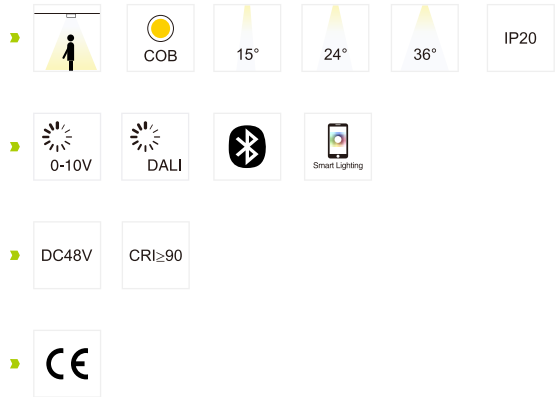


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 344	15W	900lm	15° / 24° / 36°	Ø55x156x119	magnet

CCT ——— Adjustable 2700K-5700K

Color ——— White Black



VICKY Magnetic profiles



- Safety extra-low voltage 48V output.
- Remote control, voice control, panel control and remote control are available.
- Control switch and dimming color adjustment individually or in groups to meet the needs of different scenes.

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8630 359	8W	480lm	24°/ 36°	220x22x115	magnet

CCT ————

Adjustable 2700K-5700K

Color ————

White

Black




PRISMATE

Garage light / KD light

Each LED tube can be assembled to your liking or built as displayed.
Kit includes all fasteners and connectors to build as displayed.
Features integrated wiring and snap-together design.

Application: car showroom, workshop, exhibition.




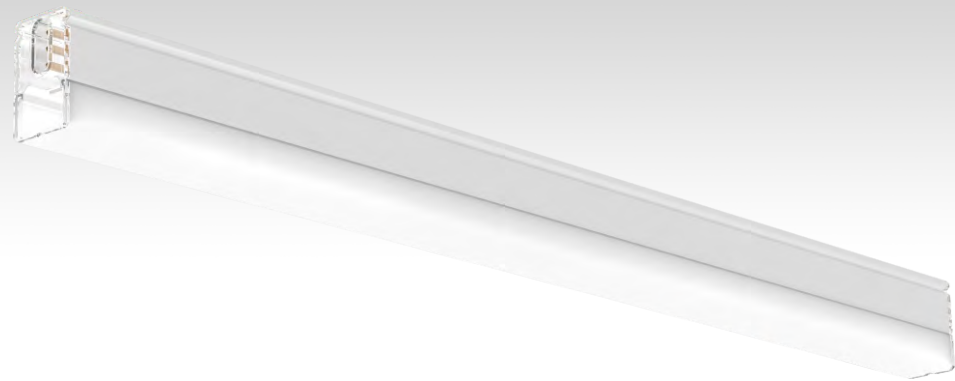

PC




Aluminum

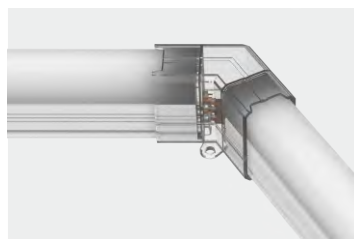


Link effect diagram

PRISMATE Garage light / KD light

NEW

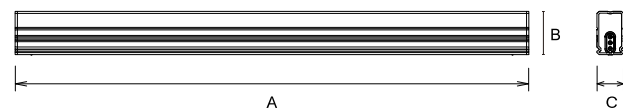

- Wire Connectors, The fixing of female and male head brings with stable self-locking mechanism, separating and combining smoothly.
- Housing Material, Double-deck aluminum, is better for the heat dissipation of the led light, and the finishing color is easily matching with different decoration of the workshop of the car washing salon.

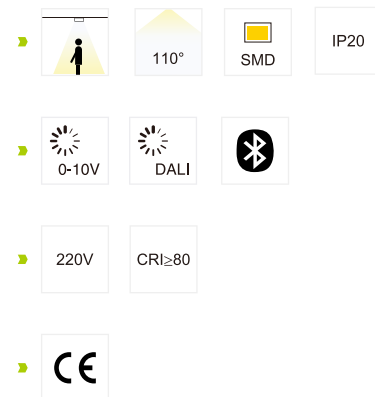

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
6015500P01	7W	630lm	110°	415x35x21.5	surface mounted
6015502P01	6W	540lm	110°	415x35x21.5	surface mounted


CCT — 3000K 4000K 6500K

Color — White Silver

Accesorios


I-type corner connecto

Code: 6015503P03




L-type corner connecto

Code: 6015504P03




120°-type corner connector

Code: 6015505P03





Y-type corner connector

Code: 6015506P03

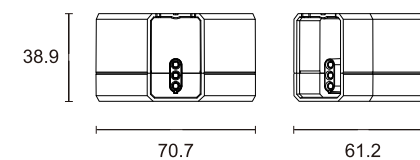

T-type corner connector

Code: 6015507P03

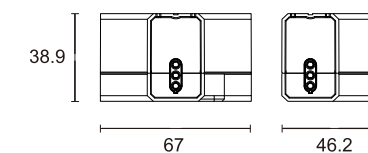




LED

Ceiling Light

—Series—

- Remote control/voice control/panelcontrol/remote control.
- Control and create groups and scenes.
- Individually or in groups to control the switch and dimming color.
- Preset rich scenes, one-click switch to follow your heart Atmospheric lighting scene.
- The light link of the autonomous DIY home integrates light control, human perception, and APP control to achieve a more intelligent lighting experience.
- Can control up to 500 lamps, all can be single lamp control separately or multiple lights together.

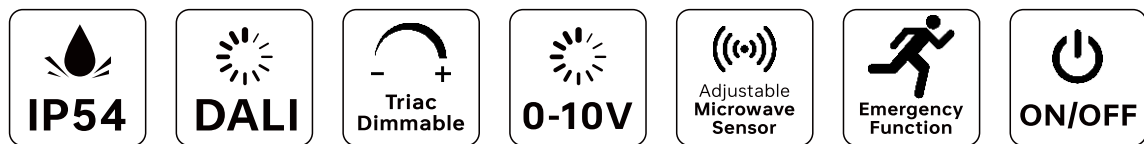

Multiple styles and forms: circular, square, and oval designs in contemporary styles, featuring clean, crisp lines that seamlessly integrate into commercial spaces.


TAVI NEW

Surface mounted light

- IP54.
- Optional with backlight function.
- Three control switch modes: Adjustable microwave sensor, Emergency Function, ON/OFF.
- Multi-protocol dimming compatibility: Supports DALI, Triac dimmable and 0-10V systems.



Multiple mounting options

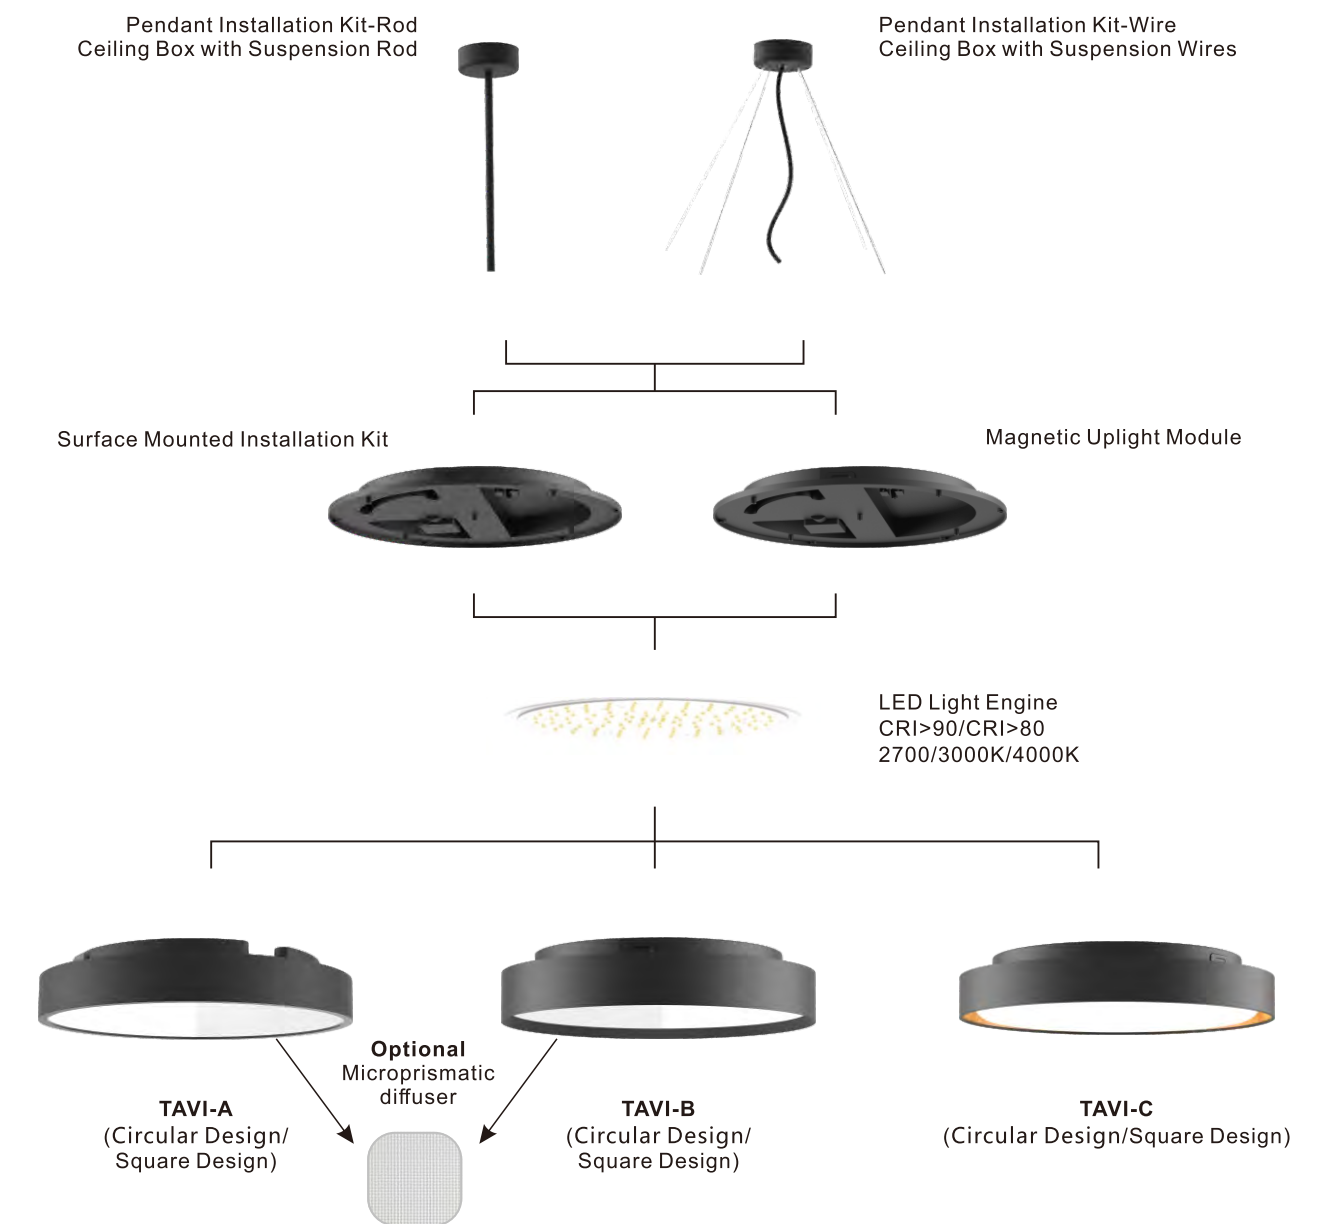


Performance

CCT turnable & Wattage turnable by DIP switch



Snap-fit installation, easy to fit

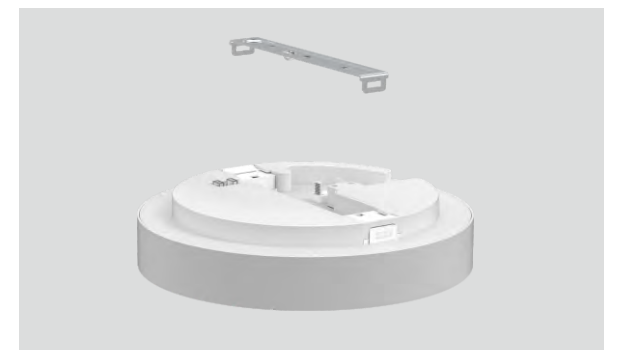




Multiple mounting options

Pendant Installation Kit-Rod
Ceiling Box with Suspension Rod




Pendant Installation Kit-Wire
Ceiling Box with Suspension Wires

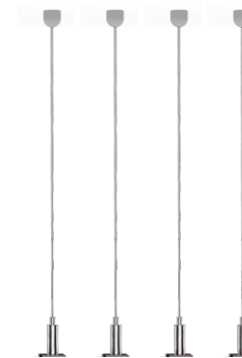

Surface Mounted Installation Kit




Magnetic Uplight Module

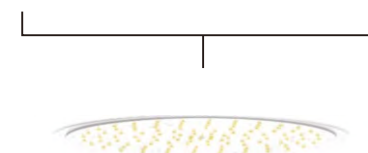

LED Light Engine
CRI>90/CRI>80
2700/3000K/4000K



TAVI-A
(Runway Design)




Optional
Microprismatic
diffuser



TAVI-B
(Runway Design)




TAVI-C
(Runway Design)

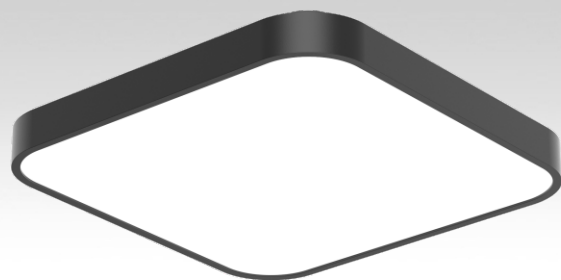


TAVI-A Surface mounted light

NEW

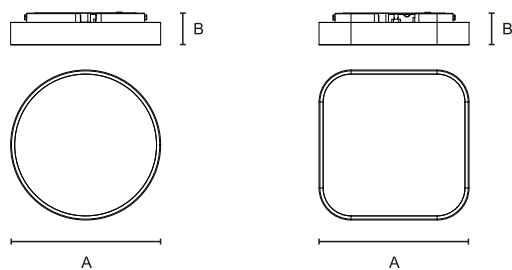

- ☐ IP54.
- ☐ Optional with backlight function.
- ☐ Three control switch modes: Adjustable microwave sensor, Emergency Function, ON/OFF.
- ☐ Multi-protocol dimming compatibility: Supports DALI, 0-10V, and Triac dimmable systems.

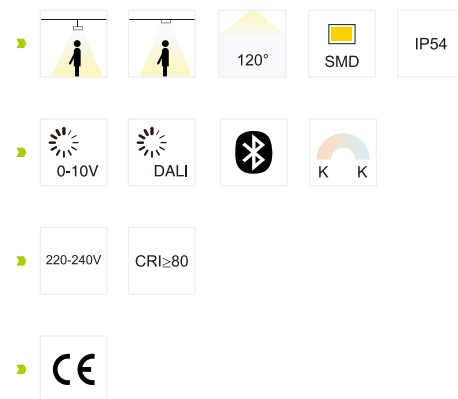

Round Design


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8709 319	30W	3600lm	120°	Ø290x65.7	surface mounted
8709 320	40W	4800lm	120°	Ø390x65.7	surface mounted
8709 321	60W	7200lm	120°	Ø590x65.7	surface mounted
8709 322	80W	9600lm	120°	Ø790x65.7	surface mounted

Square Design

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8709 323	30W	3600lm	120°	□290x65.7	surface mounted
8709 324	40W	4800lm	120°	□390x65.7	surface mounted
8709 325	60W	7200lm	120°	□590x65.7	surface mounted
8709 326	80W	9600lm	120°	□790x65.7	surface mounted


CCT — 3000K 4000K 6500K

Color — ☐ White ☐ Black

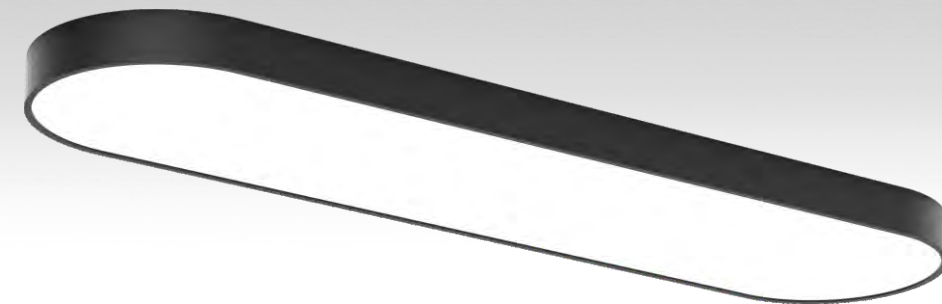


TAVI-A Surface mounted light

NEW

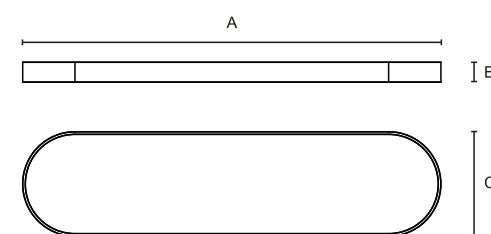

- ☐ Optional with backlight function.
- ☐ Three control switch modes: Adjustable microwave sensor, Emergency Function, ON/OFF.
- ☐ Multi-protocol dimming compatibility: Supports DALI, 0-10V, and Triac dimmable systems.


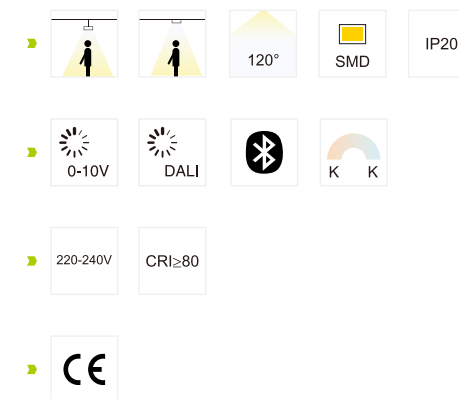


Runway Design

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8709 327	50W	6000lm	120°	1200x62.2x300	surface mounted


CCT — 3000K 4000K 6000K

Color — ☐ White ☐ Black

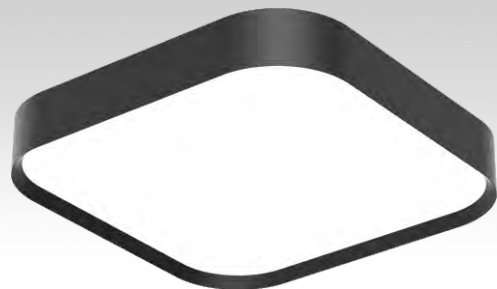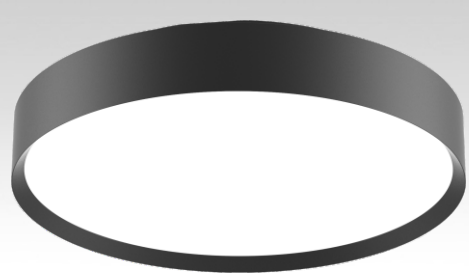


TAVI-B Surface mounted light

NEW

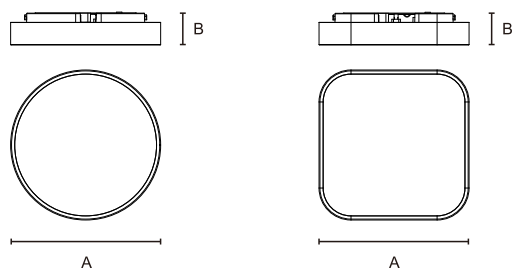

- ☐ IP54.
- ☐ Optional with backlight function.
- ☐ Three control switch modes: Adjustable microwave sensor, Emergency Function, ON/OFF.
- ☐ Multi-protocol dimming compatibility: Supports DALI, 0-10V, and Triac dimmable systems.

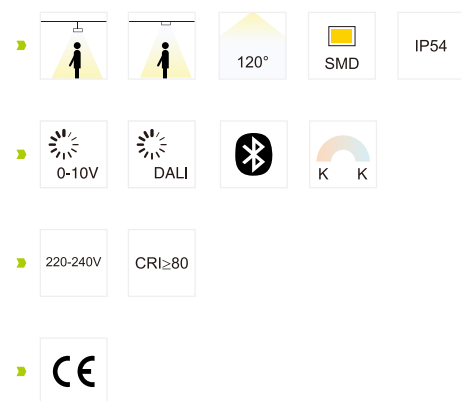

Round Design


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8709 301	30W	3600lm	120°	Ø290x71.6	surface mounted
8709 302	40W	4800lm	120°	Ø390x71.6	surface mounted
8709 303	60W	7200lm	120°	Ø590x71.6	surface mounted
8709 304	80W	9600lm	120°	Ø790x71.6	surface mounted

Square Design

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8709 305	30W	3600lm	120°	□290x71.6	surface mounted
8709 306	40W	4800lm	120°	□390x71.6	surface mounted
8709 307	60W	7200lm	120°	□590x71.6	surface mounted
8709 308	80W	9600lm	120°	□790x71.6	surface mounted


CCT — 3000K 4000K 6500K

Color — ☐ White ☐ Black

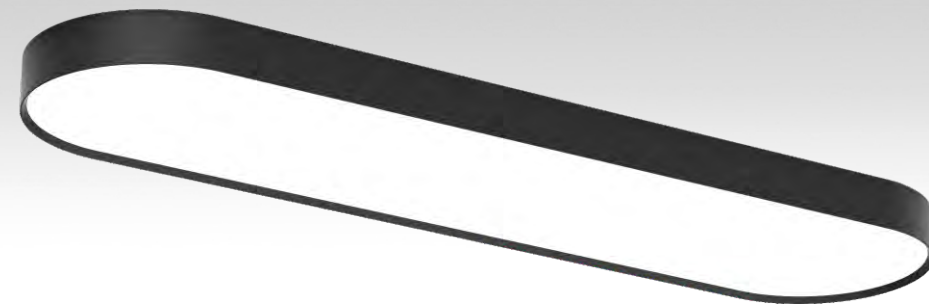


TAVI-B Surface mounted light

NEW

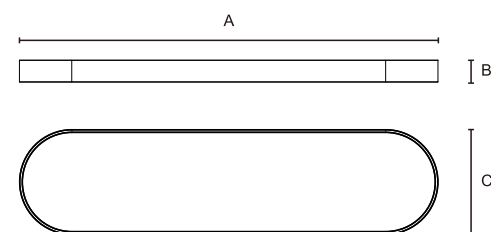

- ☐ Optional with backlight function.
- ☐ Three control switch modes: Adjustable microwave sensor, Emergency Function, ON/OFF.
- ☐ Multi-protocol dimming compatibility: Supports DALI, 0-10V, and Triac dimmable systems.


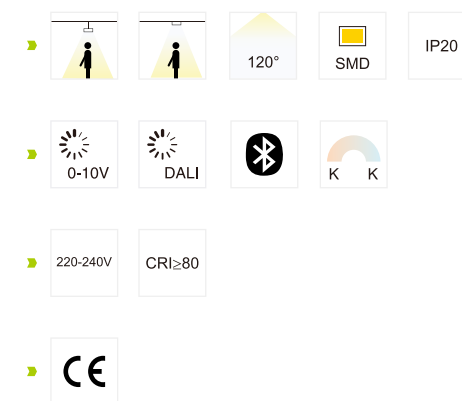


Runway Design

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8709 309	50W	6000lm	120°	1200x68x300	surface mounted


CCT — 3000K 4000K 6000K

Color — ☐ White ☐ Black

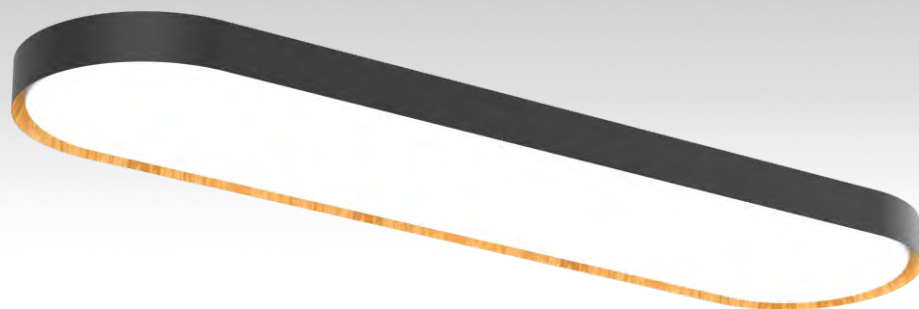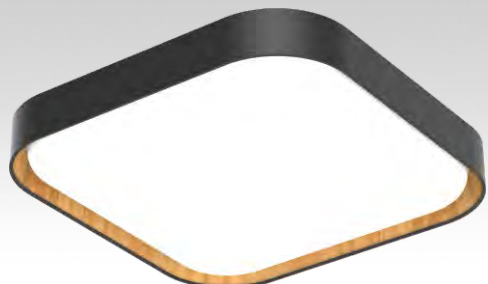


TAVI-C Surface mounted light

NEW

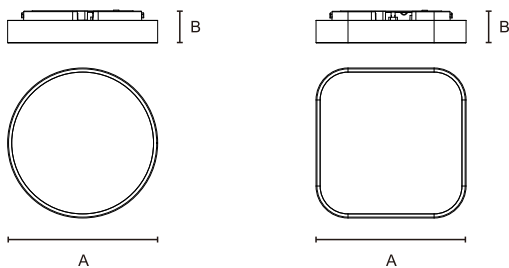

- ☐ Optional with backlight function.
- ☐ Three control switch modes: Adjustable microwave sensor, Emergency Function, ON/OFF.
- ☐ Multi-protocol dimming compatibility: Supports DALI, 0-10V, and Triac dimmable systems.

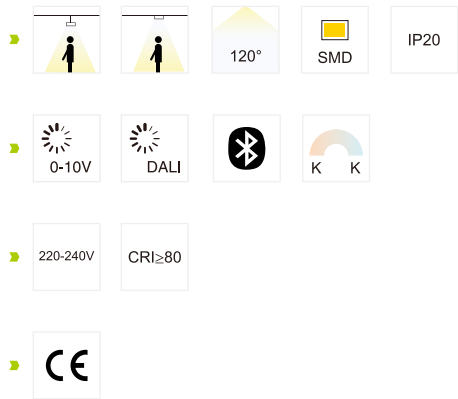

Round Design

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8709 310	30W	3000lm	120°	Ø290x52.9	surface mounted
8709 311	40W	4000lm	120°	Ø390x52.9	surface mounted
8709 312	60W	6000lm	120°	Ø590x52.9	surface mounted
8709 313	80W	8000lm	120°	Ø790x52.9	surface mounted


Square Design

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8709 314	30W	3000lm	120°	□290x52.9	surface mounted
8709 315	40W	4000lm	120°	□390x52.9	surface mounted
8709 316	60W	6000lm	120°	□590x52.9	surface mounted
8709 317	80W	8000lm	120°	□790x52.9	surface mounted


CCT — 3000K 4000K 6500K Color — White Black

TAVI-C Surface mounted light

NEW

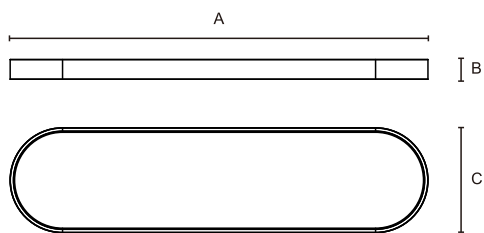

- ☐ Optional with backlight function.
- ☐ Three control switch modes: Adjustable microwave sensor, Emergency Function, ON/OFF.
- ☐ Multi-protocol dimming compatibility: Supports DALI, 0-10V, and Triac dimmable systems.

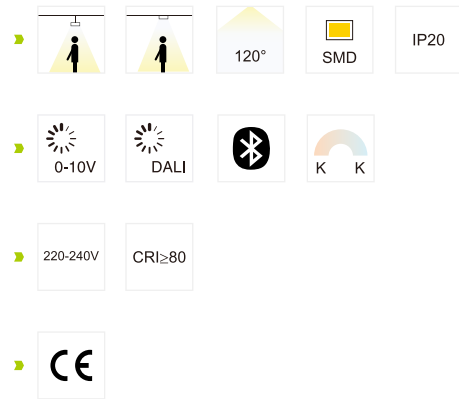

Runway Design


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8709 318	50W	5000lm	120°	1200x53.8x300	surface mounted



CCT — 3000K 4000K 6000K Color — White Black



HERA Surface mounted light



- Slim LED Ceiling with backlight.
- Option in different color ring: white/black/wood.
- IP44 with Remote control.

▶

110°

IP20

▶

DALI

▶

220V

CRI≥80

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8751 376	18W	1600lm	110°	Ø290x46.5	surface mounted
8751 388	30W	2750lm	110°	Ø380x54.5	surface mounted



CCT

3000K

4000K

6000K

Color



White

Black

Wood



BOSCO Downlight

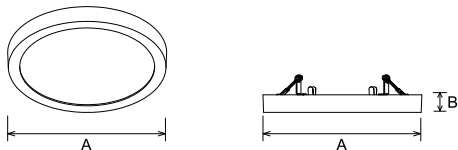

- Simple and elegant appearance design.
- High luminous efficiency up to 120lm/w.
- It can be installed both recessed and surface-mounted.
- The color temperature and power can be adjusted by DIP switch.

▶

110°

IP20

▶

DALI

K K

▶

220V

UGR<22

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8820 306	9W-12W-15W	1080lm-1440lm-1800lm	110°	Ø225x25	Ø70- 200
8820 307	15W-18W-22W	1800lm-2160W-2640W	110°	Ø300x25	Ø80- 260

CCT

Adjustable 3000K-6500K


Color

White


Grey



Dialable colour temperature
3-CCT optional DIP switch
3000K-4000K-6000K



BANILA Surface mounted light

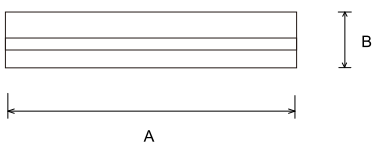

- The luminaire is protected by IP65, which ensures that rainwater will not cause any damage to the luminaire while it is under the eaves.
- 3-CCT optional DIP switch 3000K-4000K-6000K.

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8751 341	12W	1080lm	120°	Ø200x40	surface mounted
8751 342	24W	2160lm	120°	Ø280x40	surface mounted
8751 343	36W	3240lm	120°	Ø380x40	surface mounted
8751 344	42W	3780lm	120°	Ø480x40	surface mounted

CCT

3000K

4000K

6000K

Color


White

Black





ALVA Surface mounted light



- Double-layer suspension structure, double-layer heat dissipation design.
- The inner layer guides light precisely and the outer cover softens the light for anti-glare effect.
- optional 8 types of covers, 3 sizes with Ø280, Ø380 and Ø480mm.

120°

SMD

IP20

0-10V

DALI

220V

CRI≥80

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8795 601	24W	2400lm	120°	Ø280x71	surface mounted
8795 602	36W	3600lm	120°	Ø380x71	surface mounted
8795 603	48W	4800lm	120°	Ø480x71	surface mounted

CCT

3000K

4000K

6000K

Color

White




Double Shade Ceiling Light Lighting Effect
8 Different Covers Available






LOLANA Surface mounted light

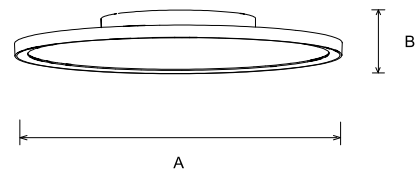

- High quality high strength engineering plastic molding lamp body.
- The ambient light on the back is configured with secondary optics to make the aperture wider and more visible.
- Suitable for home decoration style, good safety.

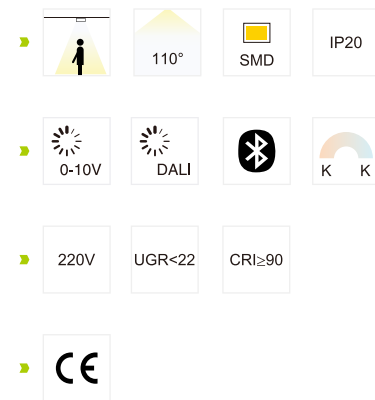


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8751 331	16+8W	1600lm	110°	Ø350x46	surface mounted
8751 332	26+8W	2600lm	110°	Ø450x46	surface mounted
8751 333	36+12W	3600lm	110°	Ø600x46	surface mounted

CCT ——— Adjustable 2700K-6500K


Color ———  White  Black



VARLEA Surface mounted light

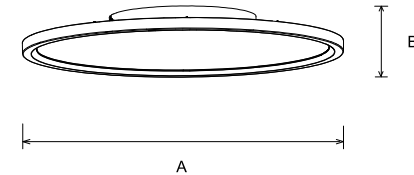

- All metal lamp body, metal texture.
- Ultra-thin lamp body, space-saving.
- Suitable for home decoration style, good safety.

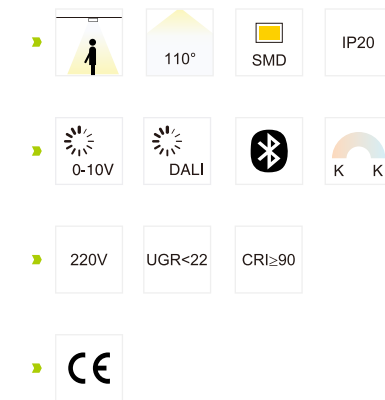


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8751 334	24W	1800lm	110°	Ø350x51	surface mounted
8751 335	32W	2304lm	110°	Ø450x51	surface mounted
8751 336	42W	3024lm	110°	Ø600x51	surface mounted

CCT ——— Adjustable 2700K-6500K


Color ———  White  Black



RIVA Surface mounted light



- Engineering PC material
- Boundless luminous design
- Ultra-thin ceiling installation
- DOB integrated LED module engine

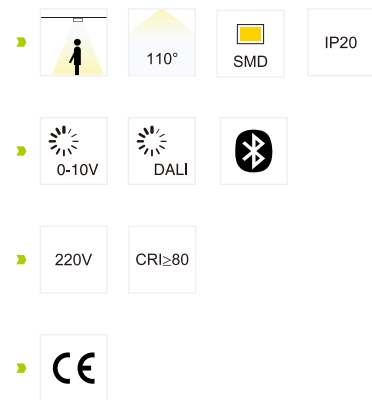


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8795 321	12/15W	1080/1350lm	110°	Ø110x42	surface mounted
8795 322	20/24W	1800/2160lm	110°	Ø160x42	surface mounted
8795 323	30/35W	2700/3150lm	110°	Ø215x42	surface mounted
8795 324	40/50W	3600/4500lm	110°	Ø300x42	surface mounted

CCT — 3000K 4000K 6000K


Color — White



RIVA Surface mounted light




- Engineering PC material
- Boundless luminous design
- Ultra-thin ceiling installation
- DOB integrated LED module engine

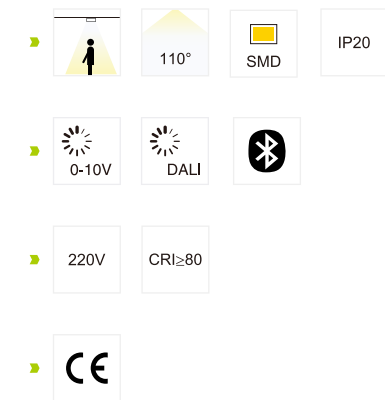


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8795 321S	12/15W	1080/1350lm	110°	110X110x42	surface mounted
8795 322S	20/24W	1800/2160lm	110°	160X160x42	surface mounted
8795 323S	30/35W	2700/3150lm	110°	215X215x42	surface mounted
8795 324S	40/50W	3600/4500lm	110°	300X300x42	surface mounted

CCT — 3000K 4000K 6000K

Color — White

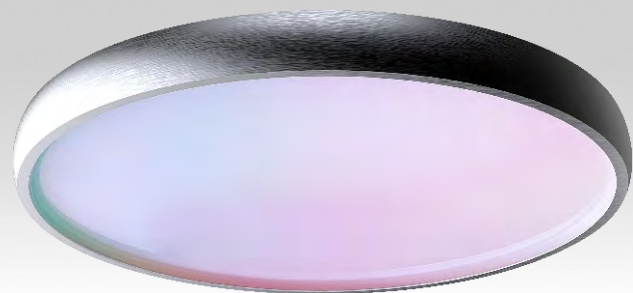


LUMINO Surface mounted light

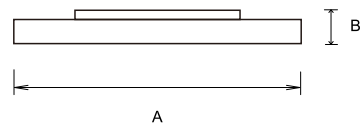

- ▶ 100°
- ▶ SMD
- ▶ IP20
- ▶ 0-10V
- ▶ DALI
- ▶ Bluetooth
- ▶ 220V
- ▶ CRI≥98
- ▶ CRI≥92
- ▶

• Expanding the color temperature range from 2700K-5700K to 1800K-12000K, the ultra-wide color gamut daylight realistically simulates 24-hour natural light from sunrise to sunset, covering the 24-hour changes of sunlight during the day and night, allowing each space state to meet the lighting requirements suitable for the corresponding scene.

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8751 401	70W	4550lm	100°	Ø530x80	surface mounted

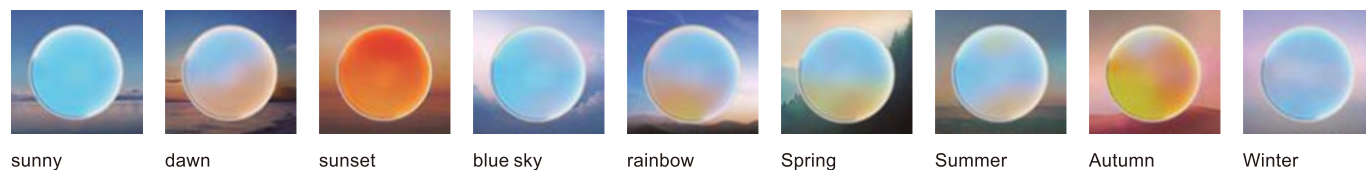

CCT ——— Adjustable 1800K-12000K

Color ——— White Black Grey






LED Downlight –Series–

- Modern and stylish design: Strict structure, unique appearance, in line with modern needs.
- Downlights offer an aesthetic and cost effective alternative having in mind illuminance level and the harmonious effect of vertical illuminance.
- Sizes for different applications needs: Designed for general applications, where high visual comfort and pleasant illuminance is needed.
- Simple Installation: use spring clip to fix it on the ceiling, hassle free, install in seconds. Recessed can is no longer a limitation for your choice.



ZONA Downlight



- Traic dimmable is optional
- DIP Switch For CCT adjustable to Save Stock
- Deep Anti-Glare,meet the market demand
- Complete wattage and item size can be selected

▶

60°

IP20

▶

0-10V

▶

220V

UGR<19

CRI≥80

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8898 301	15W	1500lm	60°	Ø165x81	Ø140
8898 302	20W	2000lm	60°	Ø200x95	Ø160
8898 303	30W	3000lm	60°	Ø230x106	Ø200
8898 304	40W	4000lm	60°	Ø280x128	Ø240

CCT

3000K

4000K


6000K

Color

White



ZEUS Downlight



- IP54 waterproof
- Deep anti-glare
- High light efficiency
- Die-cast aluminum lamp body

▶

60°

IP54

▶

0-10V

▶

220V

UGR<19

CRI≥80

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8815 301	15W	1750lm	60°	Ø170x75.5	Ø150
8815 302	22W	2600lm	60°	Ø223x74	Ø200

CCT

Adjustable 3000K-6500K


Color

White


Black



BONNIE Downlight

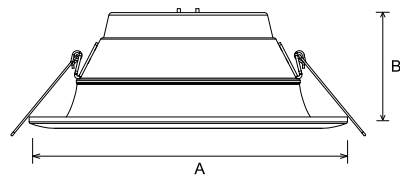

- A sleek design with a high-quality finish
- With a high luminous efficacy, it can reach up to 100lm/w
- The light distribution is even and creates a soft illumination
- It comes with dip switches for adjusting the color temperature and power settings

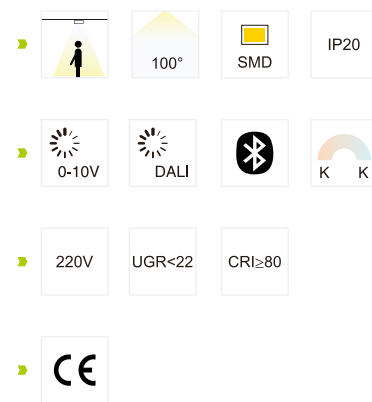


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8884 307	5W/9W	450lm/810lm	100°	Ø115x58	Ø75x90
8884 308	9W/13W	810lm/1170lm	100°	Ø145x61	Ø100x120
8884 309	13W/18W	1170lm/1620lm	100°	Ø166x67	Ø115x140
8884 310	15W/23W	1350lm/2070lm	100°	Ø200x73	Ø150x175
8884 311	25W/30W	2250lm/2700lm	100°	Ø230x76	Ø170x200

CCT — 3000K 4000K 6000K


Color — White Grey



CELIA Downlight



- Serialized design
- Space saving solution
- Options in COB&SMD
- Die-cast aluminum lamp body

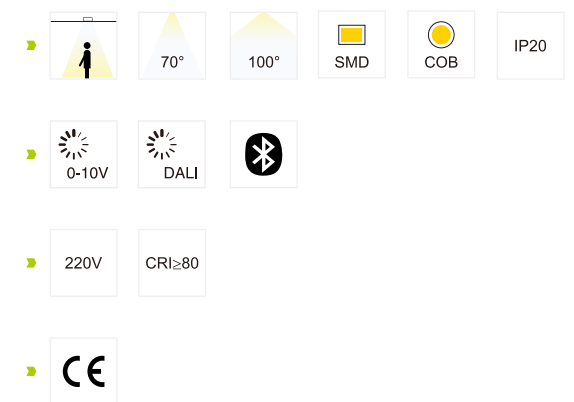


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8897 365	5/7W	450/630lm	110°	Ø90x32	Ø70
8897 375	9/12W	810/1080lm	110°	Ø120x45	Ø100
8897 385	15/20W	1350/1800lm	110°	Ø165x45	Ø145
8897 395	30/35W	2700/3150lm	110°	Ø225x45	Ø200

CCT — 2700K 4000K 6000K


Color — White



FIONA Downlight



- Space-saving Solution: Ultra-thin LED recessed ceiling light, high brightness.Only requires 29mm clearance of ceiling space, perfect solution for your narrow ceiling which is not suitable for a can light.
- Reliable Material:Die-cast aluminum material not only guarantees corrosion protection and rust prevention,but improves the heat dissipation efficiency.

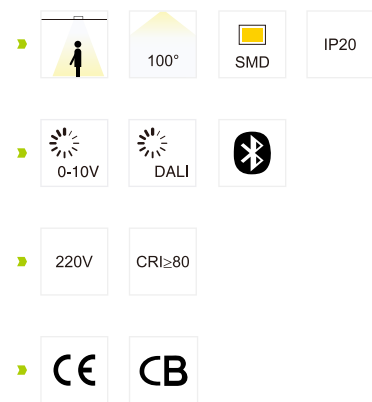


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8897 303	7-10W	700/1000lm	100°	Ø105x45	Ø90
8897 304	15-18W	1500/1800lm	100°	Ø130x45	Ø110
8897 306	25-30W	2500/3000lm	100°	Ø195x60	Ø175
8897 318	35-40W	3500/4000lm	100°	Ø225x60	Ø200

CCT — 3000K 4000K 6500K


Color — White



BOLE Downlight



- Space-saving Solution: Ultra-thin LED recessed ceiling light, high brightness.Only requires 30mm clearance of ceiling space, perfect solution for your narrow ceiling which is not suitable for a can light.
- Reliable Material:Die-cast aluminum material not only guarantees corrosion protection and rust prevention,but improves the heat dissipation efficiency.



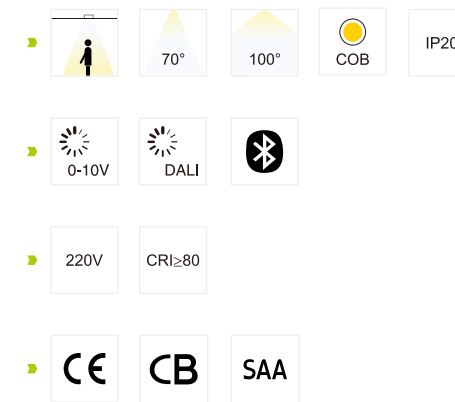


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8897 325	7W	590lm	70°	Ø90x45	Ø70
8897 335	10W	960lm	100°	Ø120x43	Ø100
8897 305	20W	1850lm	100°	Ø165x55	Ø140
8897 308	30W	2760lm	100°	Ø220x60	Ø200
8897 318	40W	3480lm	100°	Ø220x60	Ø200


CCT — 3000K 4000K 6000K


Color — White

COSMO Downlight

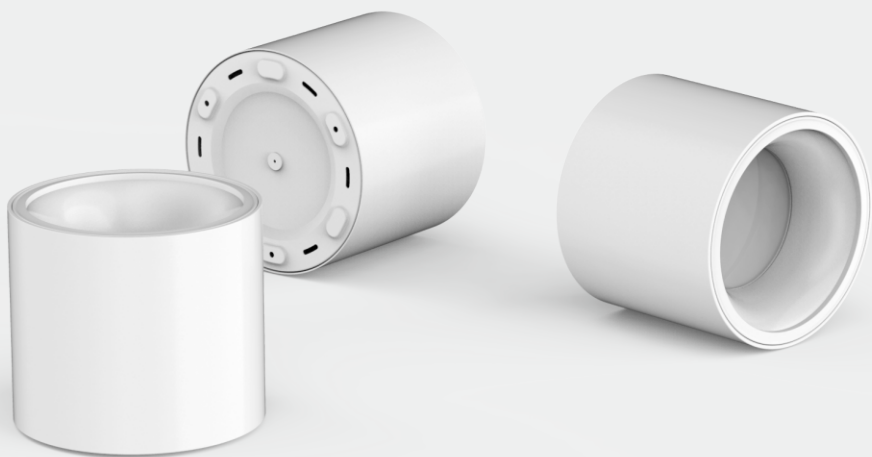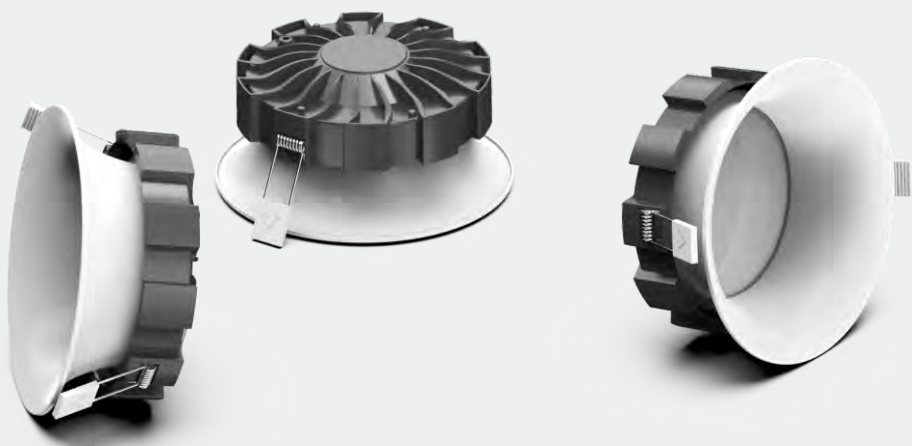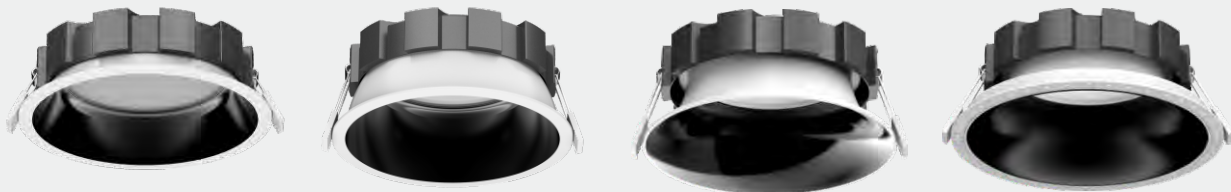


Modular design of the COSMO family

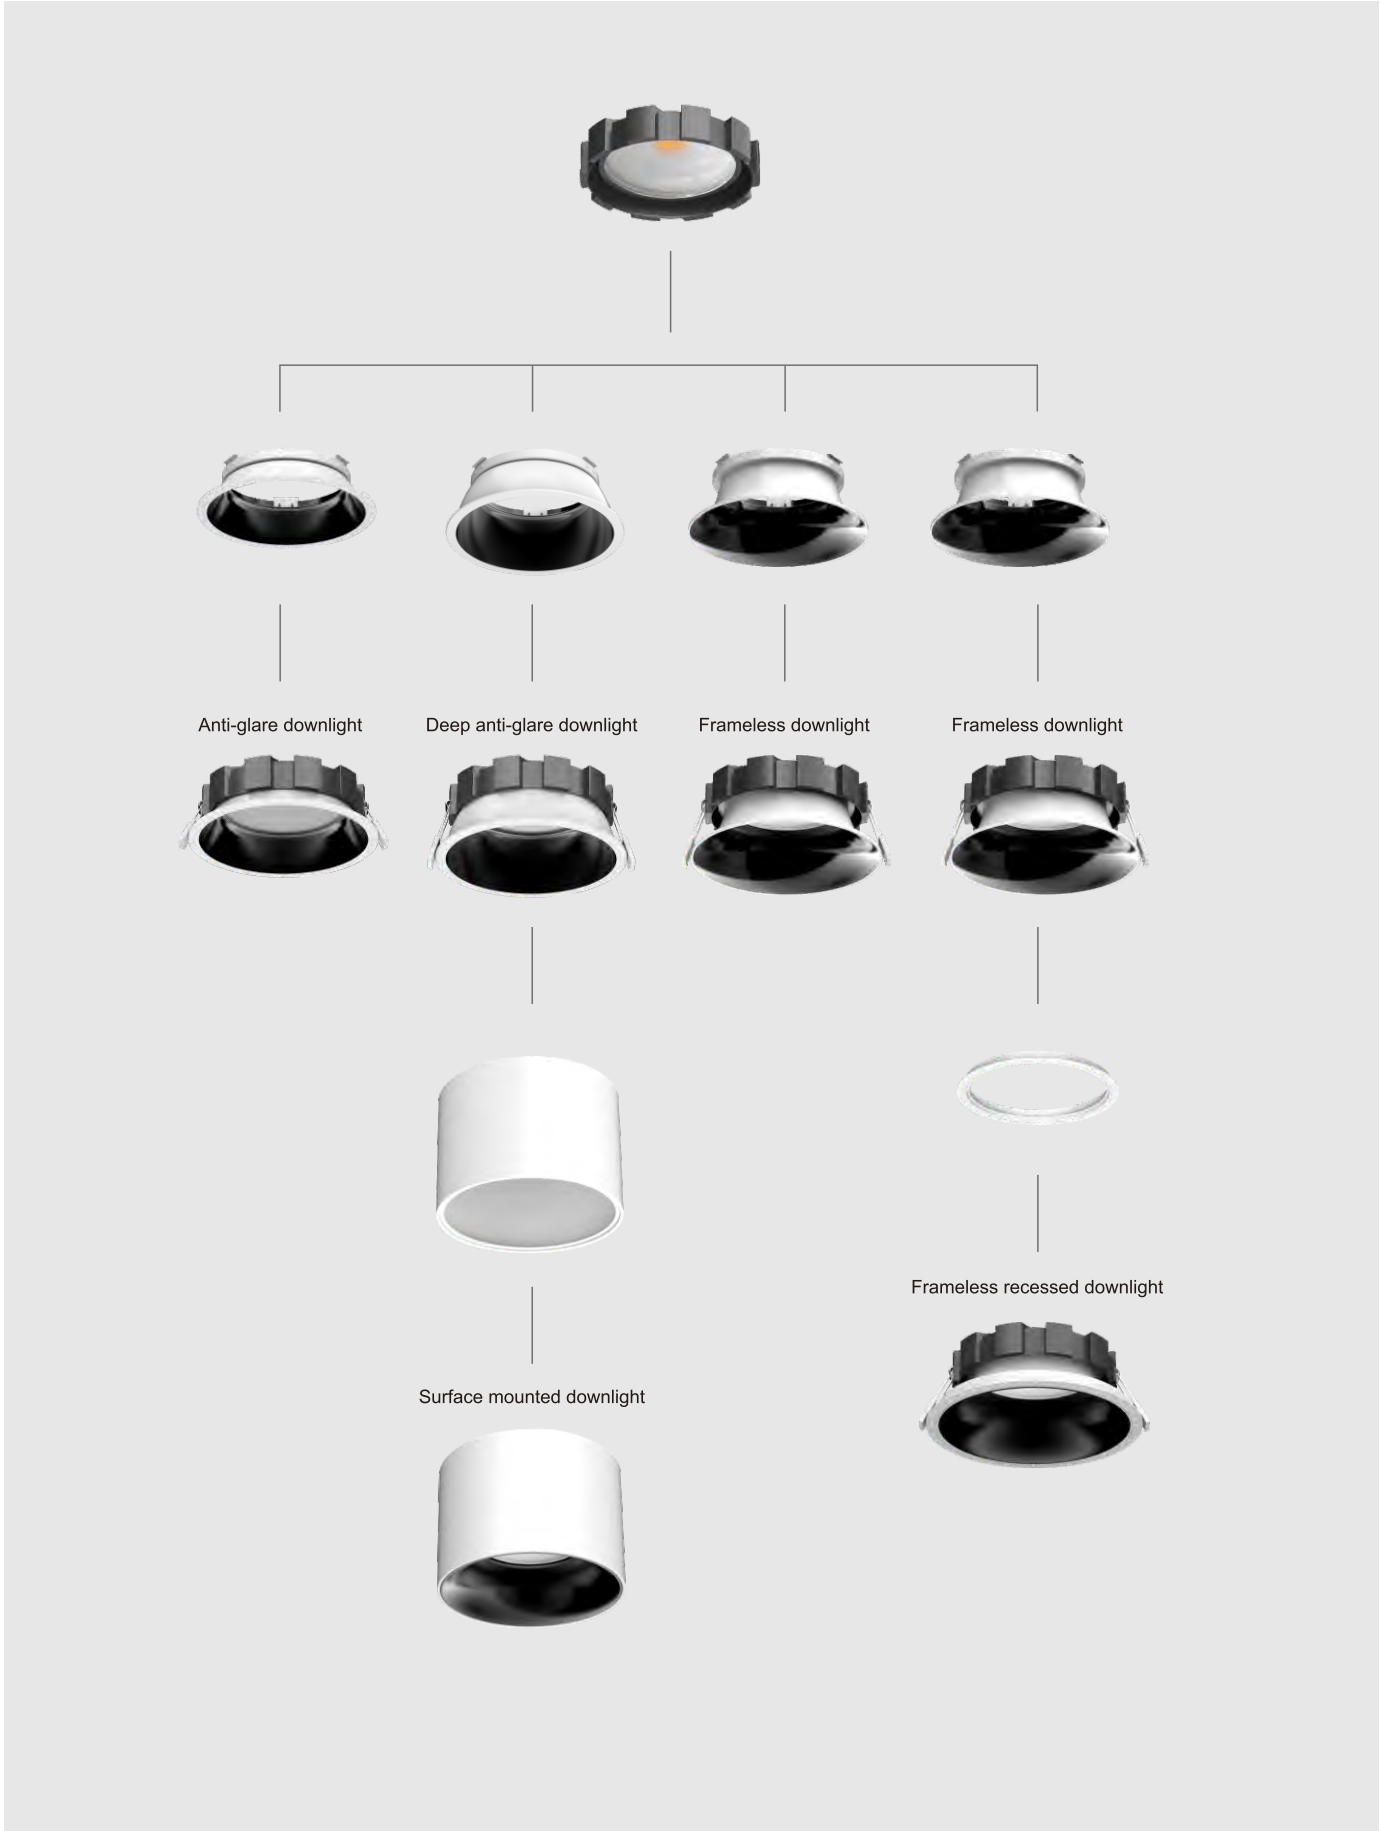


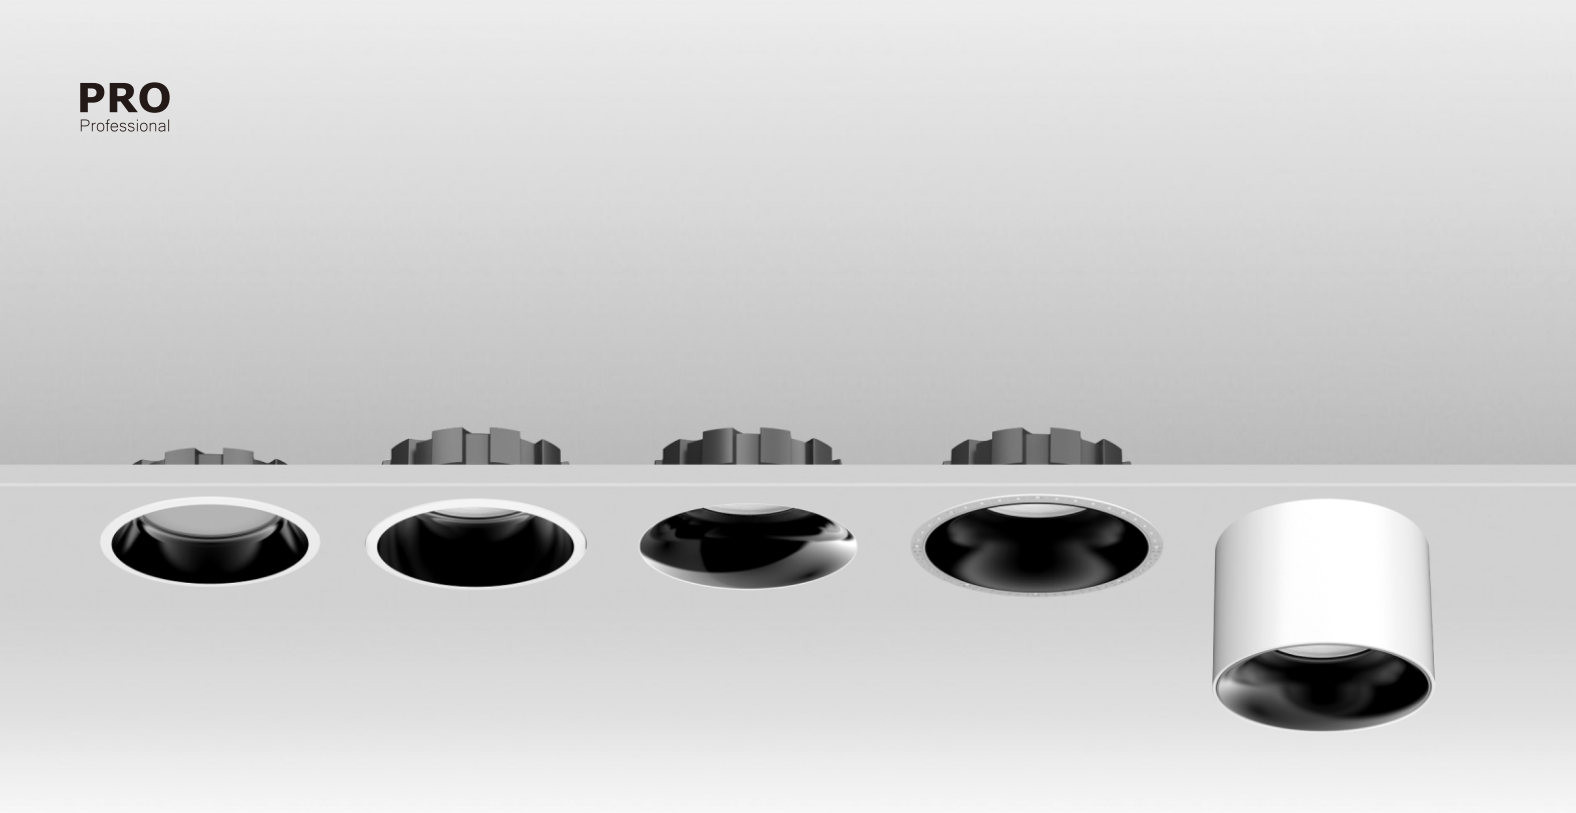

COSMO Downlight

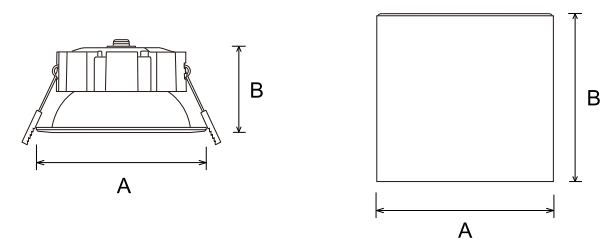

- Including four types of embedded spotlight modules with low glare deep glare, frameless, and pre-embedded, as well as surface mounted tube lights, widely used in various industrial lighting needs.
- The COSMO family includes four types of embedded spotlight modules with low glare, deep glare, frameless, and pre-embedded, as well as surface mounted tube lights. Each designed with 12W/18W /24W/35W power and different illumination requirements.
- Designed with three anti-glare covers, the appearance and anti-glare can be freely matched according to requirements.

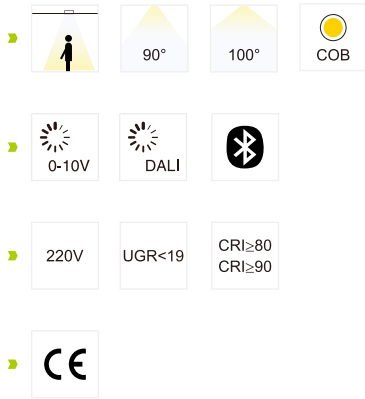

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8821 319	12W	1440lm	90°	Ø120x42	Ø100-110
8821 307	18W	2160lm	100°	Ø140x45	Ø120-130
8821 310	24W	2880lm	100°	Ø160x50	Ø140-150
8821 313	30W	3600lm	100°	Ø180x60	Ø160-170
8821 316	35W/42W	4200lm/5040lm	100°	Ø220x66	Ø200-210

CCT 3000K 4000K 5700K

Color White Titanium



Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8821 318	12W	1440lm	85°	Ø120x60	Ø100-110
8821 306	18W	2160lm	90°	Ø140x62	Ø120-130
8821 309	24W	2880lm	90°	Ø160x70	Ø140-150
8821 312	30W	3600lm	90°	Ø180x90	Ø160-170
8821 315	35W/42W	4200lm/5040lm	90°	Ø220x100	Ø200-210



Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8821 320	12W	1440lm	85°	Ø120x60	Ø100-110
8821 308	18W	2160lm	90°	Ø140x62	Ø120-130
8821 311	24W	2880lm	90°	Ø160x70	Ø140-150
8821 314	30W	3600lm	90°	Ø180x90	Ø160-170
8821 317	35W/42W	4200lm/5040lm	90°	Ø220x100	Ø200-210



Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8821 320	12W	1440lm	85°	Ø120x60	Ø125-130
8821 308	18W	2160lm	90°	Ø140x62	Ø145-150
8821 311	24W	2880lm	90°	Ø160x70	Ø165-170
8821 314	30W	3600lm	90°	Ø180x90	Ø185-190
8821 317	35W/42W	4200lm/5040lm	90°	Ø220x100	Ø225-230





Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8751 366	12W	1440lm	85°	Ø125x120	surface mounted
8751 362	18W	2160lm	90°	Ø150x123	surface mounted
8751 363	24W	2880lm	90°	Ø170x143	surface mounted
8751 364	30W	3600lm	90°	Ø190x153	surface mounted
8751 365	35W/42W	4200lm/5040lm	90°	Ø230x163	surface mounted

Optical Accessories Nano-white Black light Mirror aluminum



TETHYS Surface mounted light

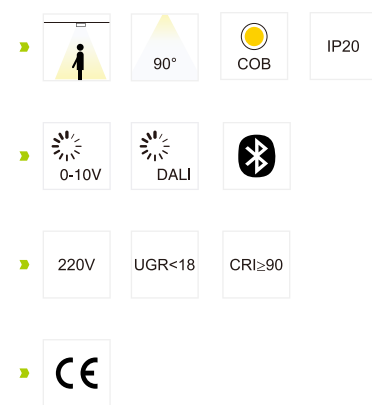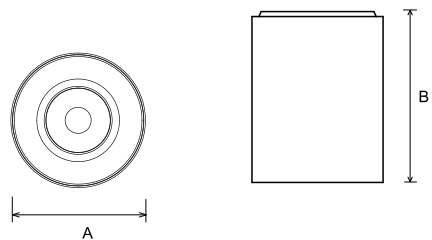

- Minimalist Spot light with 2 installations: Surface mounted and Pendant which meet different needs of different applications.
- Fixed and adjustable designs for different decorations needs.
- Anti-glare design for low glare and visual comfort.



Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8734 401	12W	960lm	90°	Ø79x103	surface mounted
8734 402	24W	1920lm	90°	Ø95x125	surface mounted
8734 402	35W	2800lm	90°	Ø120x153	surface mounted

CCT — 3000K 4000K 6000K

Color — ☐ White ☒ Black



TETHYS Surface mounted light

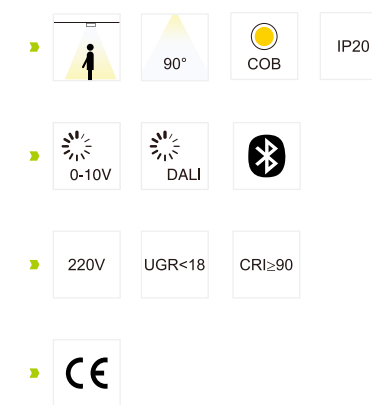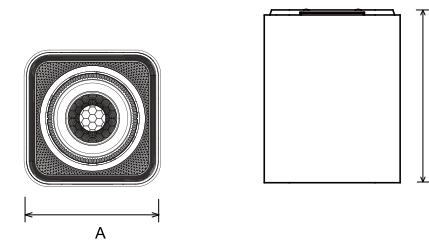

- Minimalist Spot light with 2 installations: Surface mounted and Pendant which meet different needs of different applications.
- Fixed and adjustable designs for different decorations needs.
- Anti-glare design for low glare and visual comfort.


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8734 404	12W	960lm	90°	80x80x103	surface mounted
8734 405	24W	1920lm	90°	106x106x125	surface mounted
8734 406	35W	2800lm	90°	120x120x153	surface mounted

CCT — 3000K 4000K 6000K

Color — ☐ White ☒ Black



CRIUS Surface mounted light

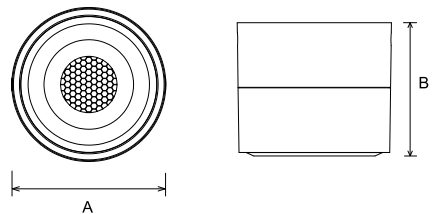

- Brightness dimmable and CCT dimmable by Phone App.
- Anti-glare & CRI≥90
- Universal swing angle: Axial rotation adjustment of 330 degrees, radial rotation adjustment of 90 degrees.
- 4 choices of light heads: Single light head, double light heads, Triple light heads and Quadruple light heads.

▶

36°

IP20

▶

▶

220V

UGR<18

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8795 320	8W	400lm	36°	Ø86x75	surface mounted


CCT

Adjustable 2700K-6000K

Color

WhiteBlack

CRIUS Surface mounted light

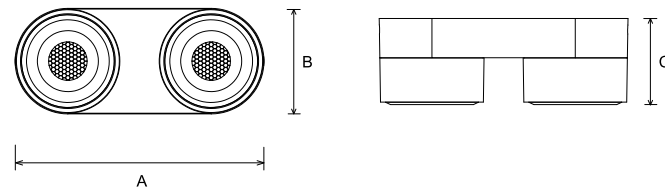

- Brightness dimmable and CCT dimmable by Phone App.
- Anti-glare & CRI≥90
- Universal swing angle: Axial rotation adjustment of 330 degrees, radial rotation adjustment of 90 degrees.
- 4 choices of light heads: Single light head, double light heads, Triple light heads and Quadruple light heads.

▶

36°

IP20

▶

▶

220V

UGR<18

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8795 321	2x8W	800lm	36°	203x86x70	surface mounted

CCT



Adjustable 2700K-6000K

Color

WhiteBlack



CRIUS Surface mounted light

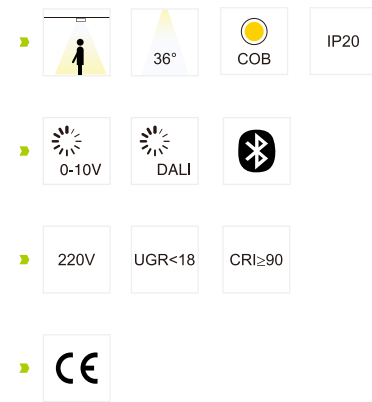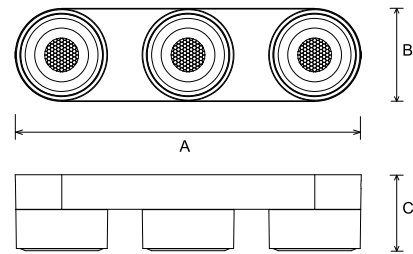

- Brightness dimmable and CCT dimmable by Phone App.
- Anti-glare & CRI≥90
- Universal swing angle: Axial rotation adjustment of 330 degrees, radial rotation adjustment of 90 degrees.
- 4 choices of light heads: Single light head, double light heads, Triple light heads and Quadruple light heads.



Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8795 322	3x8W	1200lm	36°	320x86x70	surface mounted

CCT ——— Adjustable 2700K-6000K

Color ——— White Black



CRIUS Surface mounted light

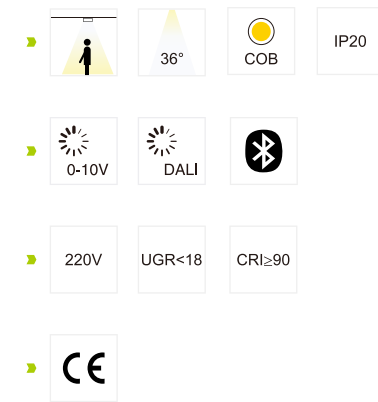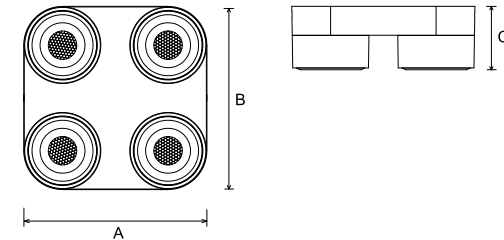

- Brightness dimmable and CCT dimmable by Phone App.
- Anti-glare & CRI≥90
- Universal swing angle: Axial rotation adjustment of 330 degrees, radial rotation adjustment of 90 degrees.
- 4 choices of light heads: Single light head, double light heads, Triple light heads and Quadruple light heads.


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8795 323	4x8W	1600lm	36°	203x203x70	surface mounted

CCT ——— Adjustable 2700K-6000K

Color ——— White Black



CORE Surface mounted light



- Patented structural design, suitable for building ceilings and ceilings with insufficient interior space, or concrete ceilings without wood ceilings.
- It is used in commercial venues such as exhibition halls, galleries, bars, cafes and dining outlets.

▶

15°

24°

36°

▶

COB

▶

IP20

▶

0-10V

▶

DALI

▶

▶

220V

▶

UGR<19

▶

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8795 313	9W	820lm	15°/ 24°/ 36°	Ø100x100	surface mounted
8795 314	20W	1570lm	15°/ 24°/ 36°	Ø134x123	surface mounted
8795 316	30W	2655lm	15°/ 24°/ 36°	Ø134x135	surface mounted
8795 317	40W	3520lm	15°/ 24°/ 36°	Ø160x158	surface mounted


CCT — 3000K 4000K

Color — White Black





CROCS Surface mounted light



- Different installation between surface mounted & hanging for your different demands.
- Reliable Material:Die-cast aluminum material not only guarantees corrosion protection and rust prevention,but strength the heat dissipation performance.

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8795 323	10W	820lm	45°	76x76x150	surface mounted
8795 324	20W	1680lm	45°	96x96x150	surface mounted
8795 325	30W	2580lm	45°	116x116x150	surface mounted

CCT

3000K

4000K

6000K

Color


White

Black




VERITAS Downlight


NEW



Silver



- Metal monocoque lamp housing.
- Reliable Material: Die-cast aluminum material not only guarantees corrosion protection and rust prevention, but improves the heat dissipation efficiency.
- Integrated linear DOB photovoltaic system.

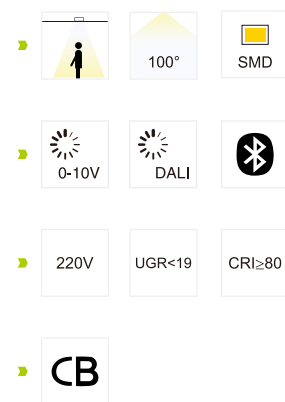

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8808 302	6W	385lm	100°	Ø95x29	Ø70-80
8808 303	10W	800lm	100°	Ø115x29	Ø85-97
8808 304	15W	1125lm	100°	Ø140x35	Ø109-122
8808 305	19W	1520lm	100°	Ø170x35	Ø138-152
8808 306	24W	2040lm	100°	Ø220x35	Ø188-202

CCT — 3000K 4000K 6500K


Color — White Silver



DENIS Downlight



- Frosted panel cover.
- Narrow edge design.
- Ultra-thin direct lighting.
- Uniform light emission, no dark areas.

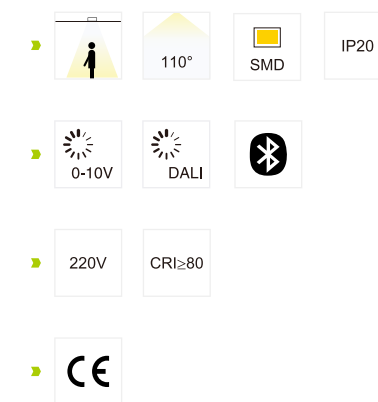


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8887 334	6W	540lm	110°	Ø90x25	Ø75
8887 335	12W	1080lm	110°	Ø120x25	Ø100
8887 336	18W	1620lm	110°	Ø170x25	Ø150
8887 337	24/30W	2160/2700lm	110°	Ø220x25	Ø200
8887 338	36/40W	3240/3600lm	110°	Ø300x25	Ø280

CCT — 3000K 4000K 6500K


Color — White



NORMAN Downlight



- Back lit ultra thin led downlight.
- DOB integrated LED module engine.
- Engineering PP material, super transparent PC diffuser.

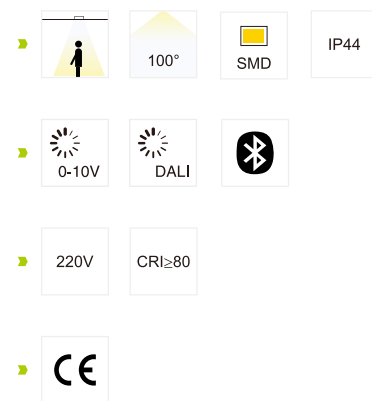

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8888 325	4W	320lm	100°	Ø94x30	Ø80
8888 304	6W	480lm	100°	Ø115x30	Ø95
8888 305	8W	640lm	100°	Ø142x30	Ø120
8888 306	12W	960lm	100°	Ø169x30	Ø145
8888 307	18W	1440lm	100°	Ø195x30	Ø170
8888 308	24W	1920lm	100°	Ø223x30	Ø195




CCT — 3000K 4000K 6500K


Color — ☐ White



SURI Downlight



- Ultra thin height.
- Die-cast aluminum lamp body.
- Uniform light emission, no dark areas.

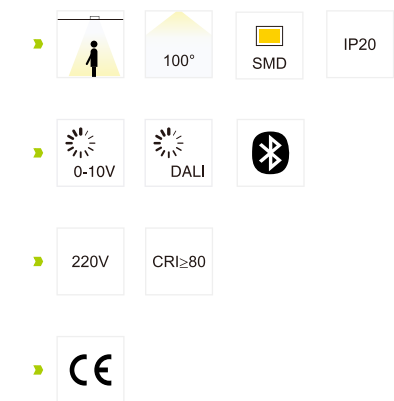

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8827 303	6W	480lm	100°	Ø99x29	Ø75
8827 304	12W	960lm	100°	Ø120x37	Ø90-100
8827 305	18W	1440lm	100°	Ø145x37	Ø105-135
8827 306	24W	1920lm	100°	Ø180x37	Ø145-170


CCT — Adjustable 3000K-6500K

Color — ☐ White



CCT ADJUSTABLE

PALCO Downlight



- CCT adjustable
- IP44 waterproof
- Integrated design, cost saving
- Built-in trailing edge dimmable driver
- Polyamide body with latest heat dissipation technology

▶

100°

IP44

▶

0-10V

K

K

▶

220V

CRI≥80

▶

SAA

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8882 302	6W	540lm	100°	Ø92x56	Ø75
8882 302W (CCT Adjustable)	6W	540lm	100°	Ø92x56	Ø75
8882 303	9W	880lm	100°	Ø115x65	Ø90
8882 303W (CCT Adjustable)	9W	880lm	100°	Ø115x65	Ø90

CCT

3000K

4000K


5700K

Adjustable 3000K-5700K-4000K


Color

White



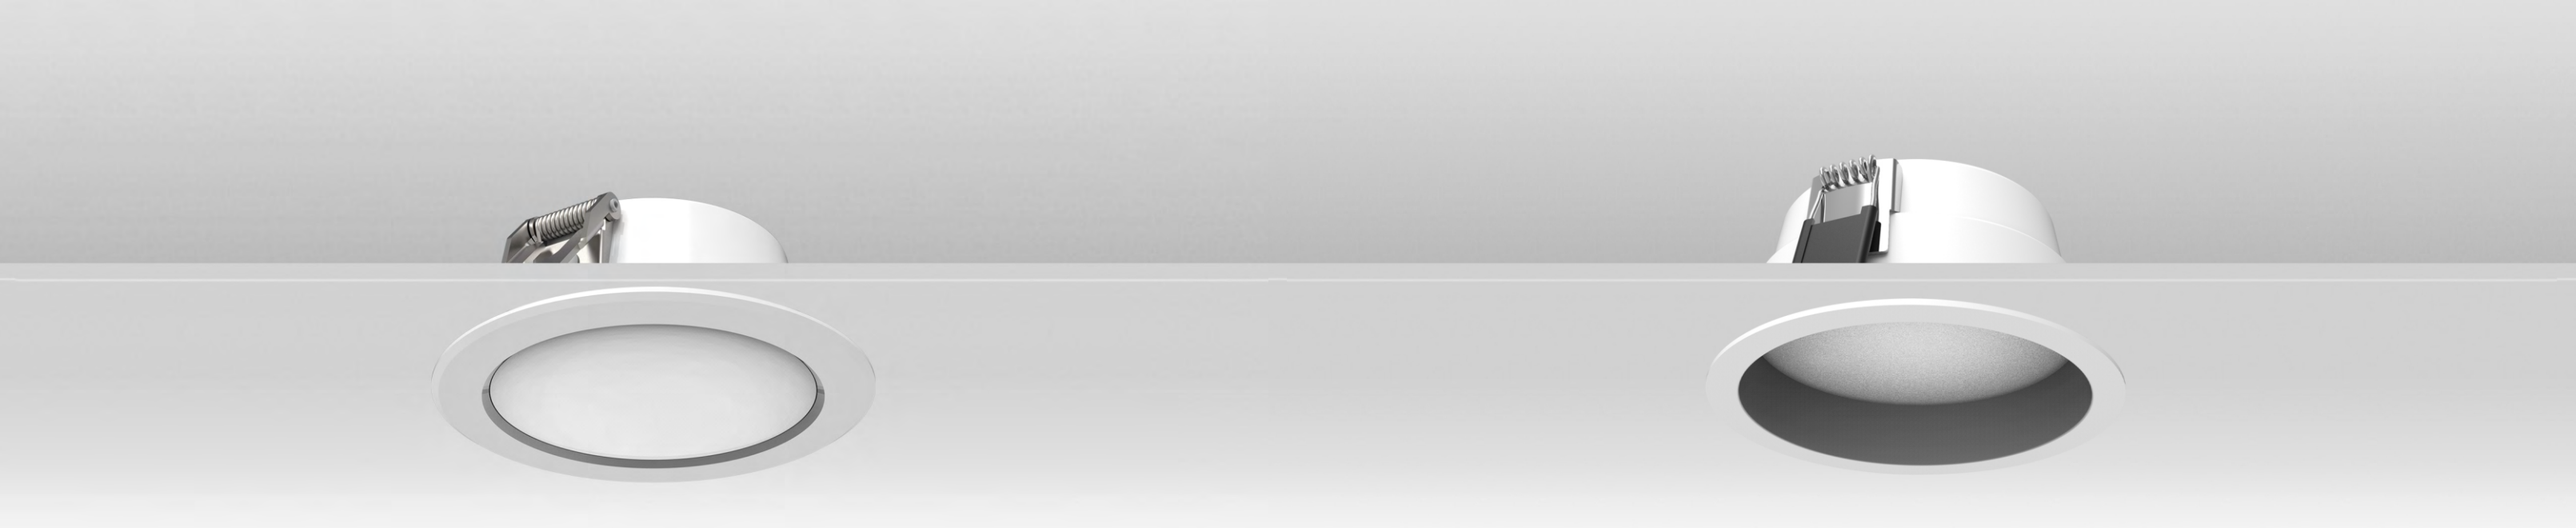

VIOLA Downlight

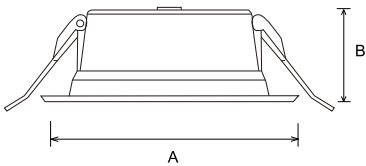

- Simple and stylish.
- Nano-level surface treatment.
- Optoelectronic integrated design.
- Die-cast aluminum lamp body.

▶

100°

IP20

▶

0-10V

DALI

K

K

▶

220V

CRI≥90

UGR<19

▶

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8808 301	6W	400lm	100°	Ø90x32	Ø75

CCT

3000K


4000K

6500K

Color

White

SOME Downlight



- Close structure design: dust-proof, insect-proof, grease-proof and soot proof.
- Ultra-thin design for different applications and comfortable atmosphere.
- Constant-current driver and High CRI.

▶

24°

36°

90°

IP20

▶

0-10V

DALI

K

K

▶

220V

CRI≥90

UGR<19

[>-<] ±25°

▶

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8828 314	6W	360lm	90°	Ø85x45	Ø75
8828 315	6W	330lm	24°/36°	Ø85x45	Ø75
8828 316	10W	650lm	90°	Ø100x48	Ø90

CCT

3700K

4000K

6500K

Adjustable 3000K-5700K-4000K

Color


White




LED Spotlight -Series-

- Ceiling spotlight is a range of recessed adjustable LED spotlights that offer excellent lighting performance.
- Equipping with imported high CRI light source, different beam angles design meet different requirements.
- Reduce re-lamp frequency. Lifespan over 30,000 hours. Preferred by most contractors and electricians. Guaranteed to have adhered the most demanding quality control procedures.
- Simple Installation: use spring clip to fix it on the ceiling, hassle free, instal in seconds. Recessed can is no longer a limitation for your choice.

PROTEAN Module light



- Mr16 Moudle fits our custom mounting ring or any MR16 fitting for wide range of applications
- Compared with conventional halogen MR16, the MR16(COB)module has better light efficiency and longer service life.

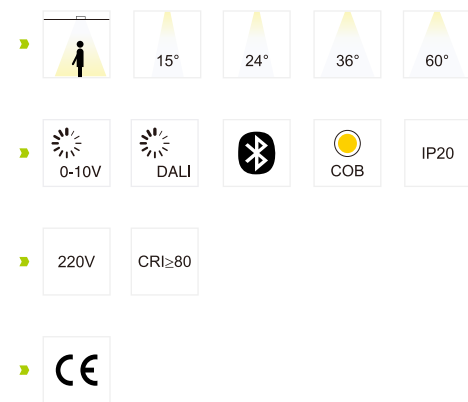


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)
9810 301	7W	560lm	15°/ 24°/ 36°/ 60°	Ø50x40
9810 302	10W	750lm	15°/ 24°/ 36°/ 60°	Ø50x50
9810 303	15W	975lm	15°/ 24°/ 36°/ 60°	Ø50x60

CCT 2700K 3000K 4000K

Color Titanium modular Black

PROTEAN DIY Module

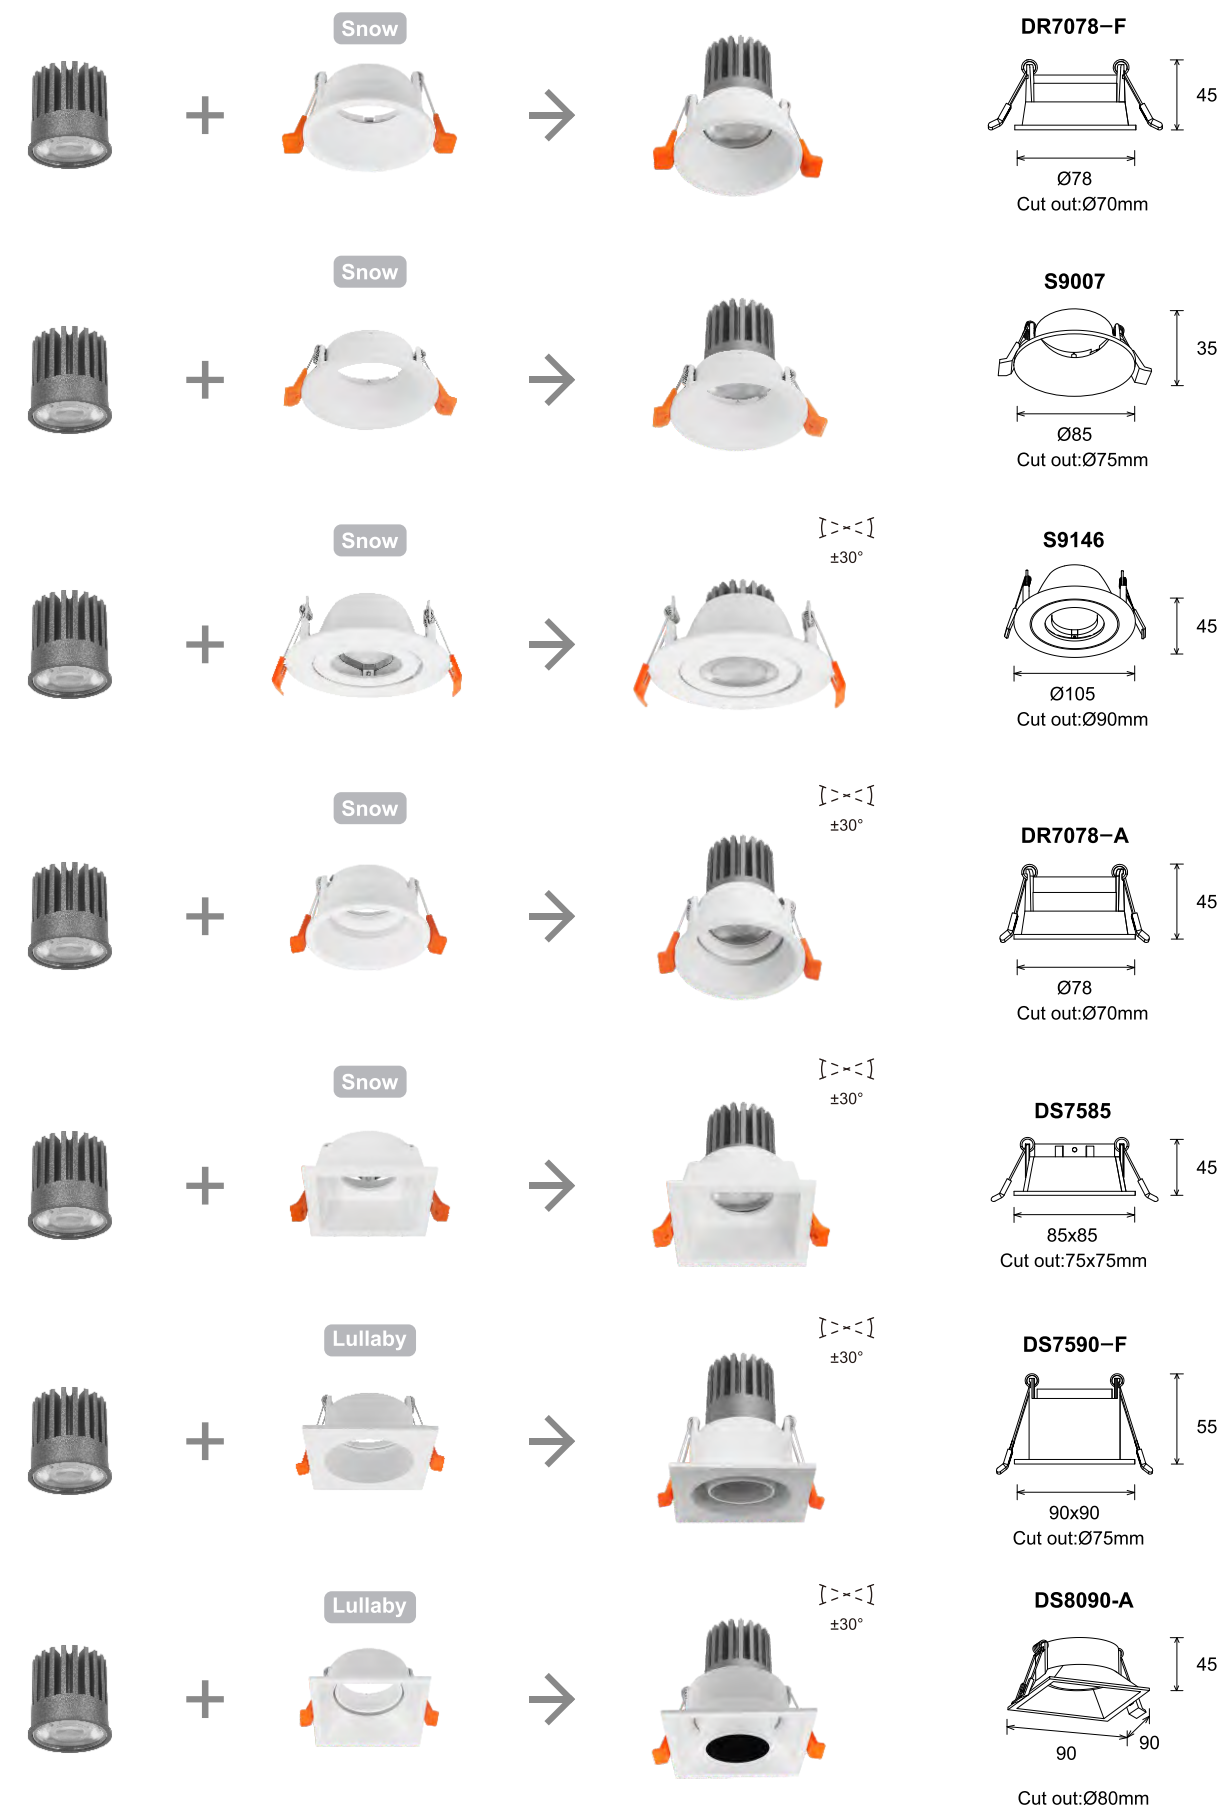

Optical Accessories

PROTEAN DIY Module



+

Lullaby



→



±30°

DS7075



55
Ø75
Cut out:Ø70mm



+

Lullaby




→



±30°

DR9040



40
Ø90
Cut out:Ø80mm



+

Grace




→



±30°

DR5564



30
Ø64
Cut out:Ø55mm



+

Surprise




→



±30°

DR8845



50
Ø109
Cut out:Ø90mm



+

Surprise




→



±30°

DR100106



100
Ø106
Cut out:Ø100mm

PROTEAN DIY Module



+

Freedom




→



±30°

SR7530



30
Ø75
Cut out:Ø75mm



+

Max




→



IP44

DR7088



45
Ø88
Cut out:Ø70mm



+

Young




→



±30°

GS100110



40
110
Cut out:100x100mm



+

Young




→



±30°

GS110205



40
205
Cut out:195x100mm



+

Pride




→



±30°

GS100113



45
113x113
Cut out:100x100mm



+

Pride




→



±30°

GS190210



45
210x113
Cut out:195x100mm



+

Pride




→



±30°


GS265283



45
283x113
Cut out:265x100mm


Optical Accessories

PROTEAN DIY Module

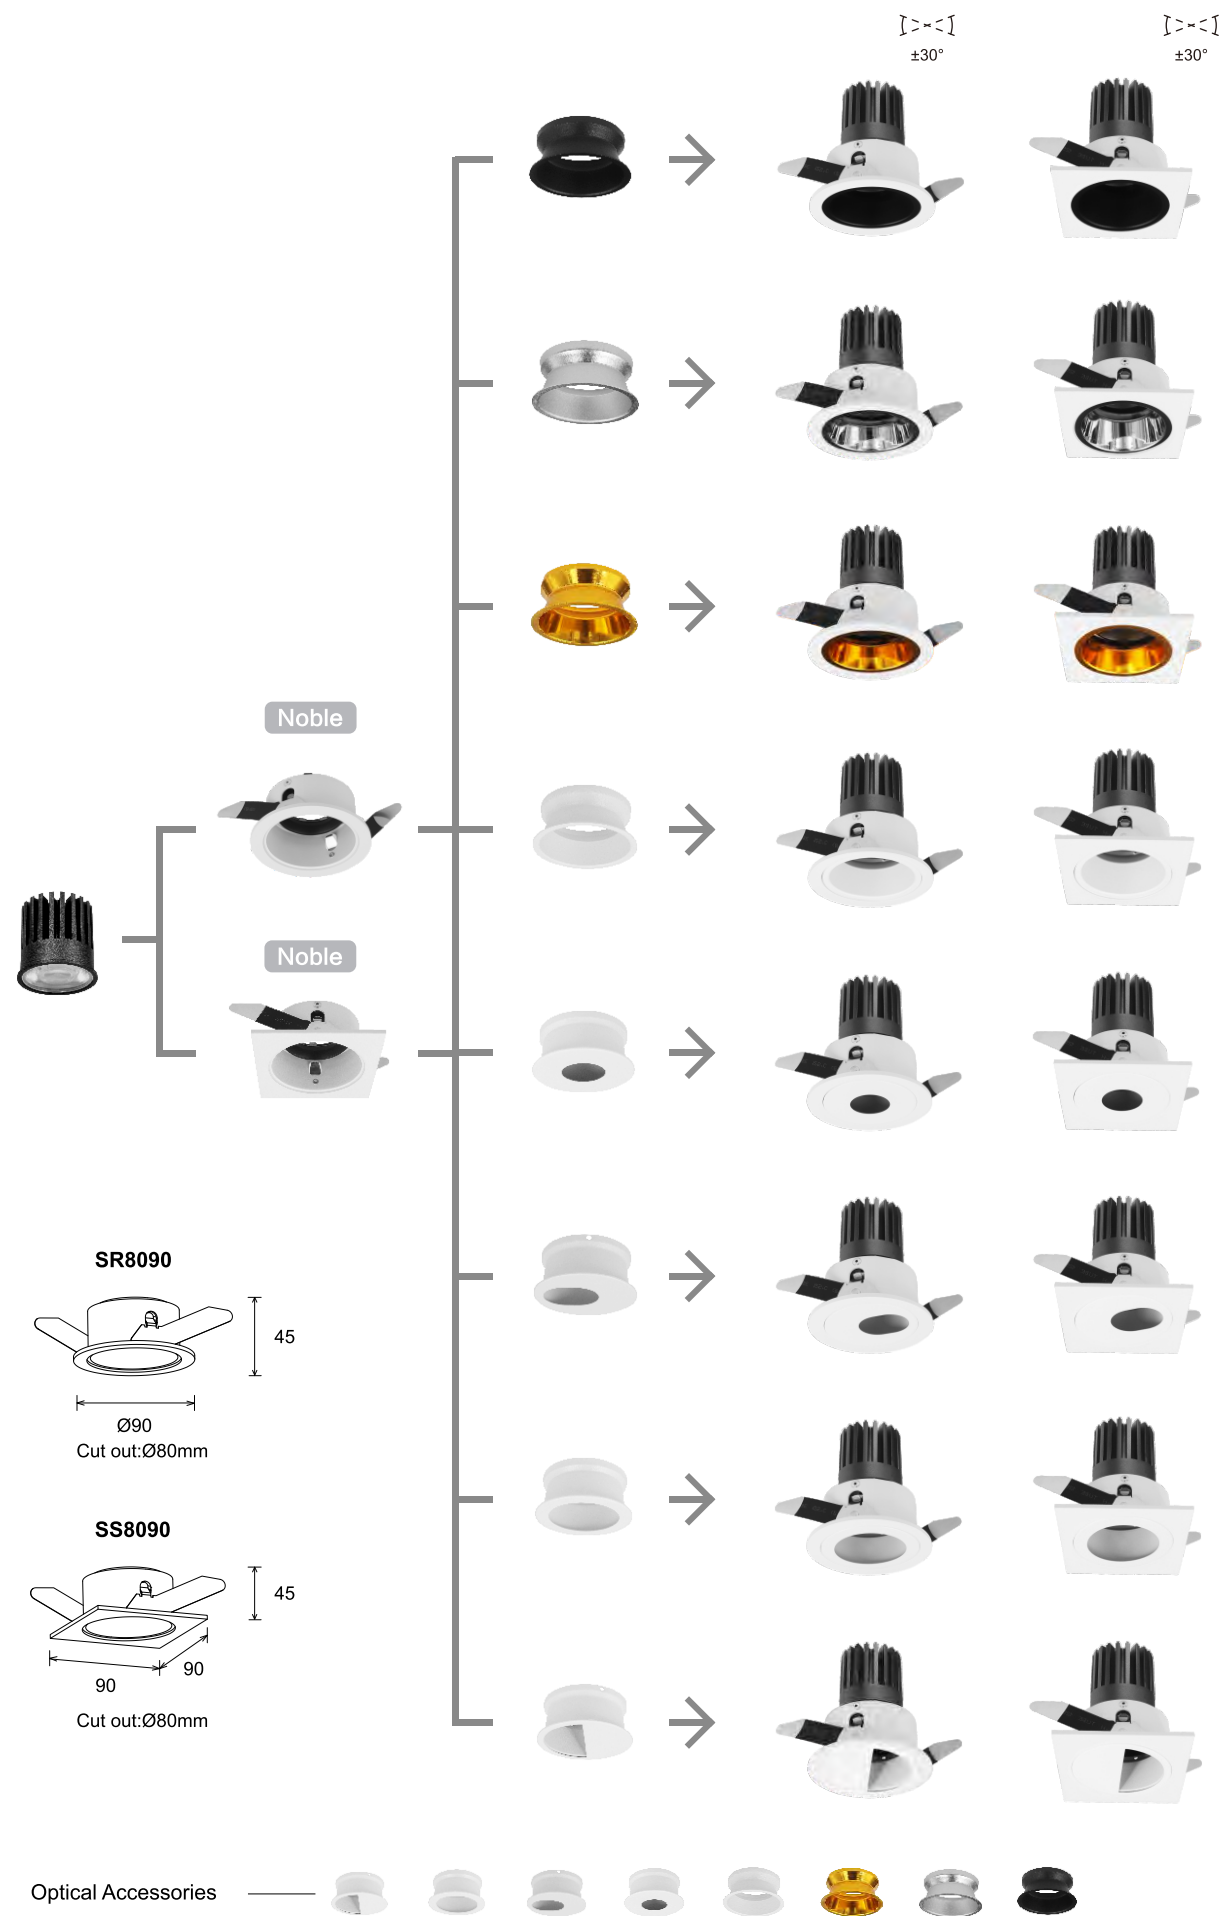

PROTEAN DIY Module

Clip construction for quick & easy replacement




Black light technology, excellent anti- glare control, provides a comfortable lighting environment.




• Reflector

DOLPHIN Spotlight



- Intimate pull ring design, convenient for adjustment from various angles.
- 360°rotating adjustment, 75° telescopic adjustment.
- Die-cast aluminum technology, fine texture, fine spray paint, wear-resistant and corrosion-resistant.

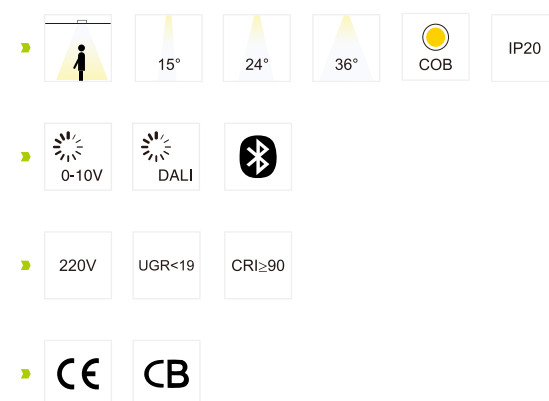

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8881 331	7-12W	630/1080lm	15°/ 24°/ 36°	Ø90x73	Ø75-80
8881 332	15-18W	1350/1620lm	15°/ 24°/ 36°	Ø110x87	Ø95-100
8881 333	25-30W	2250/2700lm	15°/ 24°/ 36°	Ø135x115	Ø115-125
8881 334	30-40W	2700/3600lm	15°/ 24°/ 36°	Ø165x143	Ø150-155


CCT — 3000K 4000K 6500K

Color — White




• Lens

DOLPHIN Spotlight



- Intimate pull ring design, convenient for adjustment from various angles.
- 360°rotating adjustment, 75° telescopic adjustment.
- Die-cast aluminum technology, fine texture, fine spray paint, wear-resistant and corrosion-resistant.

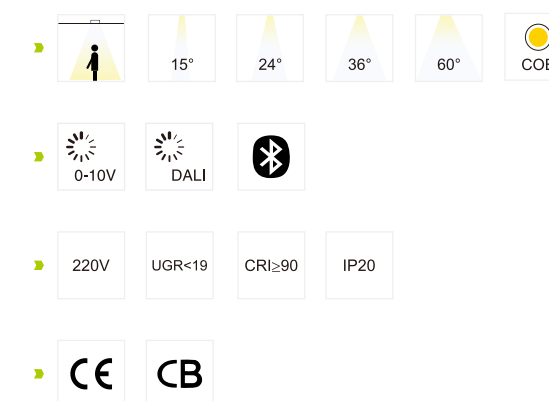

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8881 331S	5-10W	450/900lm	24°	Ø85x67	Ø75
8881 332S	15-18W	1350/1620lm	15°/ 24°/ 36°	Ø112x90	Ø100-105
8881 333S	25-30W	2250/2700lm	15°/ 24°/ 36°/ 60°	Ø140x120	Ø125-130
8881 334S	30-40W	2700/3600lm	15°/ 24°/ 36°/ 60°	Ø165x135	Ø140-155
8881 335S	45-50W	4050/4500lm	15°/ 24°/ 36°/ 60°	Ø190x160	Ø170-180


CCT — 3000K 4000K 6500K

Color — White




AURA Hotel light

NEW



- Deeply hidden anti-glare optics.
- 0-25°swing angle,0-355°horizontal rotation.
- Multiple specification options.

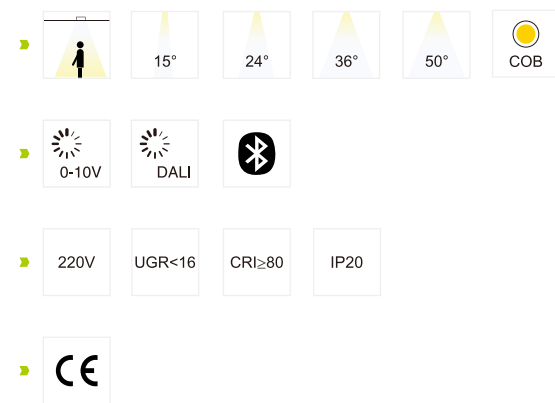


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8853 501	3W	200lm	15°/ 24°/36°/50°	Ø39x82	Ø35
8853 502	5W	375lm	15°/ 24°/36°/50°	Ø50x82	Ø45
8853 503	7W	525lm	15°/ 24°/36°/50°	Ø60x85	Ø55

CCT — 2700K 3000K 4000K


Color — White Black

AURA Hotel light

NEW



- Deeply hidden anti-glare optics.
- 0-25°swing angle,0-355°horizontal rotation.
- Multiple specification options.

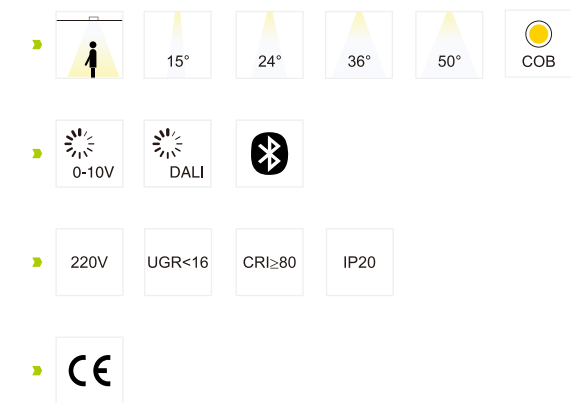


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8853 504	3W	200lm	15°/ 24°/36°/50°	Ø54x82	Ø35
8853 505	5W	375lm	15°/ 24°/36°/50°	Ø64x82	Ø45
8853 506	7W	525lm	15°/ 24°/36°/50°	Ø85x84	Ø55

CCT — 2700K 3000K 4000K

Color — White Black



OCEANUS Hotel light NEW

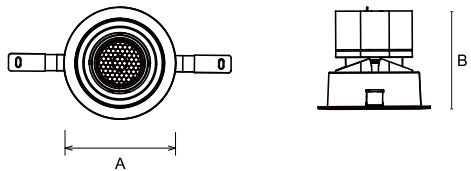


- 2 shapes: Round and Square; 3 Types with different wattage for different commercial applications.
- Adjustable light head and adjustable light direction meet different requirements of different application in light irradiation angles. Wall washer function is better.
- Double anti-glare and no flicker design can prevent stray light.

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8834 401	12W	960lm	24°/ 36°	Ø85x76	Ø75
8834 404	24W	1920lm	24°/ 36°	Ø106x107	Ø95
8834 407	35W	2800lm	24°/ 36°	Ø135x124	Ø125



CCT ——— Adjustable 2700K-6500K

Color ——— White Black



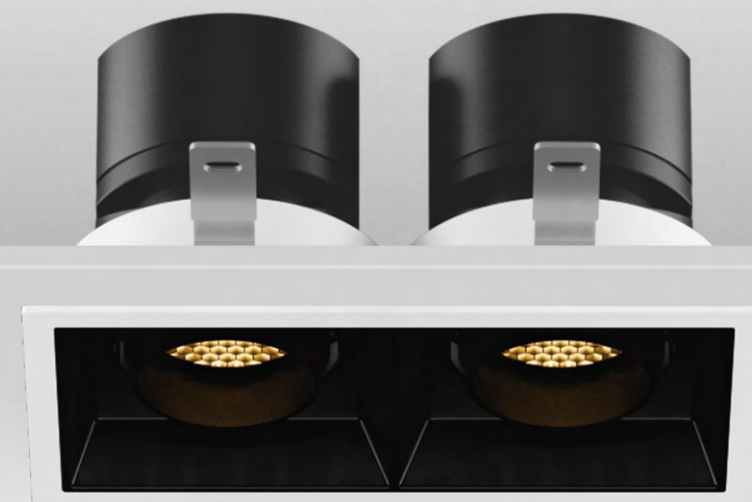

OCEANUS Hotel light NEW

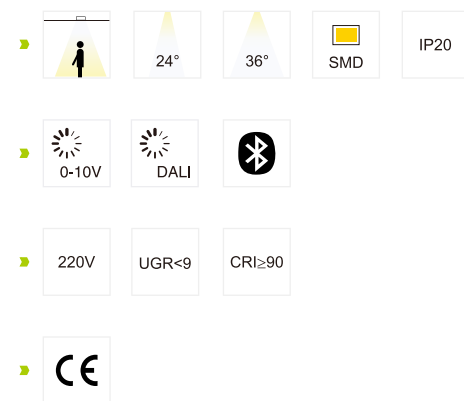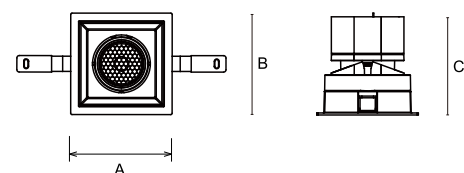



- 2 shapes: Round and Square; 3 Types with different wattage for different commercial applications.
- Adjustable light head and adjustable light direction meet different requirements of different application in light irradiation angles. Wall washer function is better.
- Double anti-glare and no flicker design can prevent stray light.

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8834 402	12W	960lm	24°/ 36°	83x83x81	75x75
8834 405	24W	1920lm	24°/ 36°	106x106x107	95x95
8834 408	35W	2800lm	24°/ 36°	135x135x129	125x125

CCT ——— Adjustable 2700K-6500K

Color ——— White Black

OCEANUS Hotel light NEW

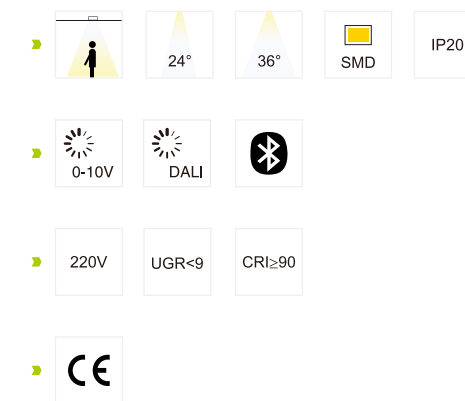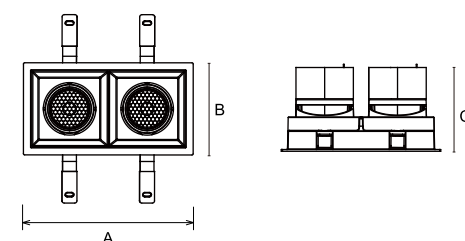

- 2 shapes: Round and Square; 3 Types with different wattage for different commercial applications.
- Adjustable light head and adjustable light direction meet different requirements of different application in light irradiation angles. Wall washer function is better.
- Double anti-glare and no flicker design can prevent stray light.


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8834 403	12W	960lm	24°/ 36°	153x83x81	145x75
8834 406	24W	1920lm	24°/ 36°	196x106x107	186x95
8834 409	35W	2800lm	24°/ 36°	235x135x129	243x125

CCT ——— Adjustable 2700K-6500K

Color ——— White Black



HYPERION Hotel light NEW



- Deep reflector by anti-glare design; UGR<12.
- DOB photoelectric integrated module, high efficiency, energy saving, stable efficiency.
- CRI90+, Color Rendering Index, provides near-sunlight quality light for true color rendering and consistency inside your home, show natural color more vibrantly.

▶

24°

36°

COB

▶

DALI

▶

220V

UGR<16

CRI≥90

IP20

IP65

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8853 401	7W	455lm	24°/ 36°	Ø62x72	Ø55
8853 402	12W	780lm	24°/ 36°	Ø85x93	Ø75
8853 403	12W	780lm	24°/ 36°	85x93	75x75
8853 404	20W	1300lm	24°/ 36°	Ø106x118	Ø95
8853 405	35W	2275lm	24°/ 36°	Ø134x145	Ø125
8853 406	50W	3250lm	24°/ 36°	Ø160x166	Ø150

CCT

2700K

3000K


4000K

Color

White

Black

HYPERION Hotel light NEW



- Deep reflector by anti-glare design; UGR<12.
- DOB photoelectric integrated module, high efficiency, energy saving, stable efficiency.
- CRI90+, Color Rendering Index, provides near-sunlight quality light for true color rendering and consistency inside your home, show natural color more vibrantly.

▶

24°

36°

COB

▶

DALI

▶

220V

UGR<16

CRI≥90

IP20

IP65

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8853 421	7W	455lm	24°/ 36°	Ø62x72	Ø55
8853 422	12W	780lm	24°/ 36°	Ø85x93	Ø75
8853 423	12W	780lm	24°/ 36°	85x93	75x75
8853 424	20W	1300lm	24°/ 36°	Ø106x118	Ø95
8853 425	35W	2275lm	24°/ 36°	Ø134x145	Ø125
8853 426	50W	3250lm	24°/ 36°	Ø160x166	Ø150

CCT

2700K

3000K

4000K


Color

White


Black



MAYA Hotel light




- Modular design: The surface-rings and lamp body are easily configurable to be different combinations, aiming at meeting your different request at same time.
- CRI90+, Color Rendering Index, provides near-sunlight quality light for true color rendering and consistency inside your home, show natural color more vibrantly.

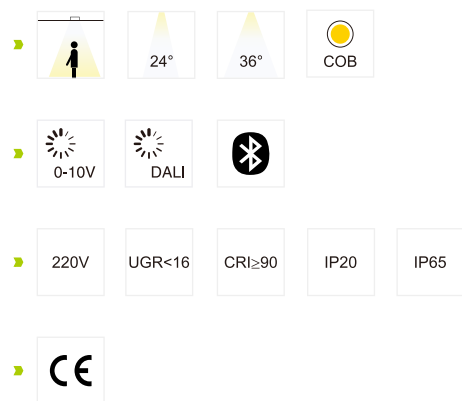


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8853 391(Round)	9W/12W	360lm/480lm	24°/ 36°	Ø85x97	Ø75

CCT — 2700K 3000K 4000K


Optical Accessories — Wallwasher

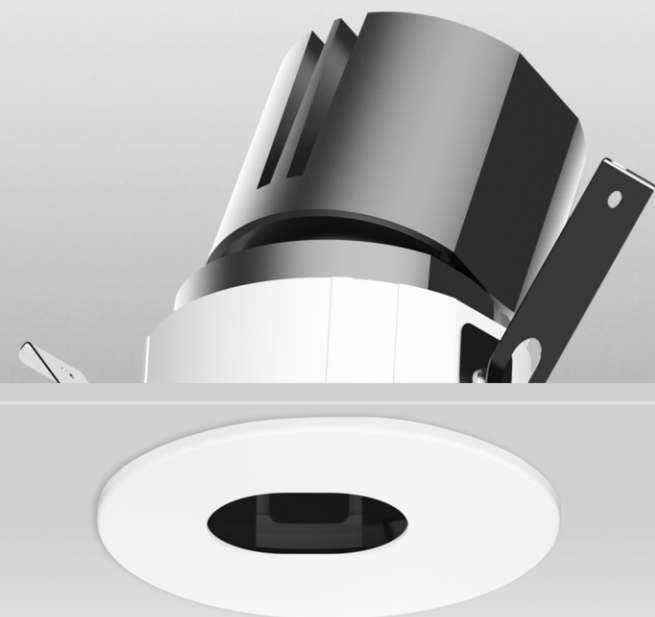

MAYA Hotel light



- Modular design: The surface-rings and lamp body are easily configurable to be different combinations, aiming at meeting your different request at same time.
- CRI90+, Color Rendering Index, provides near-sunlight quality light for true color rendering and consistency inside your home, show natural color more vibrantly.

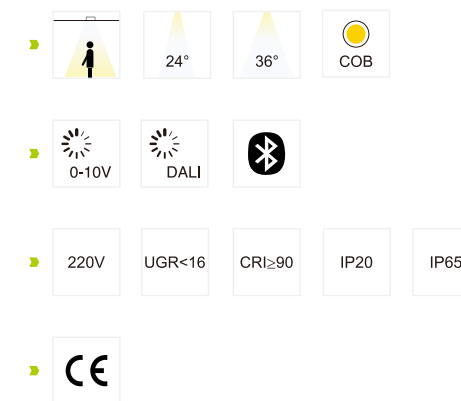


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8853 392(Ellipse)	9W/12W	360lm/480lm	24°/ 36°	Ø85x97	Ø75

CCT — 2700K 3000K 4000K


Optical Accessories — Wallwasher



MAYA Hotel light




- Modular design: The surface-rings and lamp body are easily configurable to be different combinations, aiming at meeting your different request at same time.
- CRI90+, Color Rendering Index, provides near-sunlight quality light for true color rendering and consistency inside your home, show natural color more vibrantly.

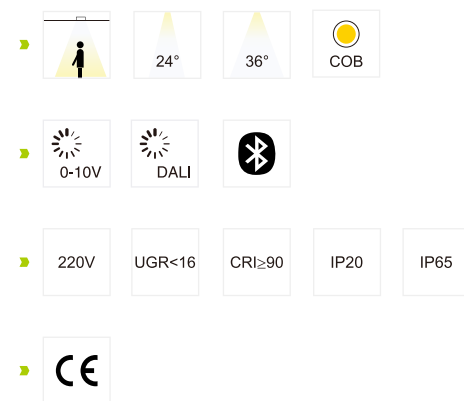


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8853 393(Fixed)	9W/12W	430lm/590lm	24°/ 36°	Ø85x97	Ø75

CCT — 2700K 3000K 4000K


Optical Accessories — Chrome Gold Black

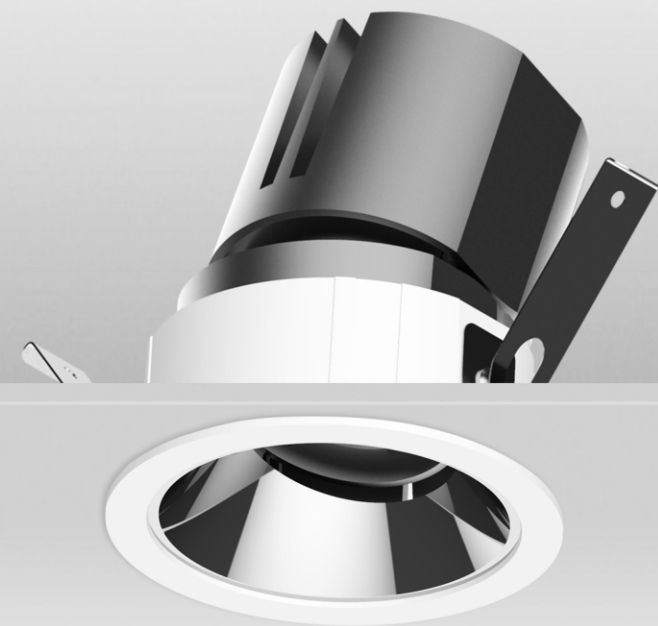

MAYA Hotel light



- Modular design: The surface-rings and lamp body are easily configurable to be different combinations, aiming at meeting your different request at same time.
- CRI90+, Color Rendering Index, provides near-sunlight quality light for true color rendering and consistency inside your home, show natural color more vibrantly.

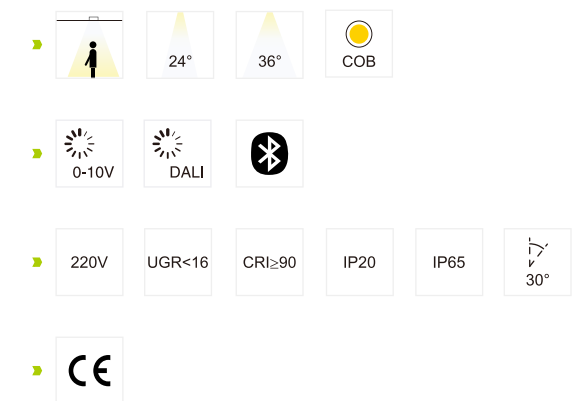


Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8853 394(Adjustable)	9W/12W	430lm/590lm	24°/ 36°	Ø85x97	Ø75

CCT — 2700K 3000K 4000K

Optical Accessories — Chrome Gold Black



FLORA Hotel light



- Multiple specification options
- 0-25° swing angle, 0-355° horizontal rotation
- Adjustable light direction
- Deeply hidden anti-glare optics, UGR<9

▶

24°

36°

50°

▶

0-10V

DALI

▶

220V

UGR<9

CRI≥80

IP20


▶

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Cut-out(mm)
8853 307	7W	490lm	24°/ 36°/ 50°	Ø64x60	Ø55
8853 308	9/12W	630/840lm	24°/ 36°/ 50°	Ø84x80	Ø75
8853 309	15W	1050lm	24°/ 36°/ 50°	Ø104x95	Ø95


CCT — 3000K 3500K 4000K

Color — White Black



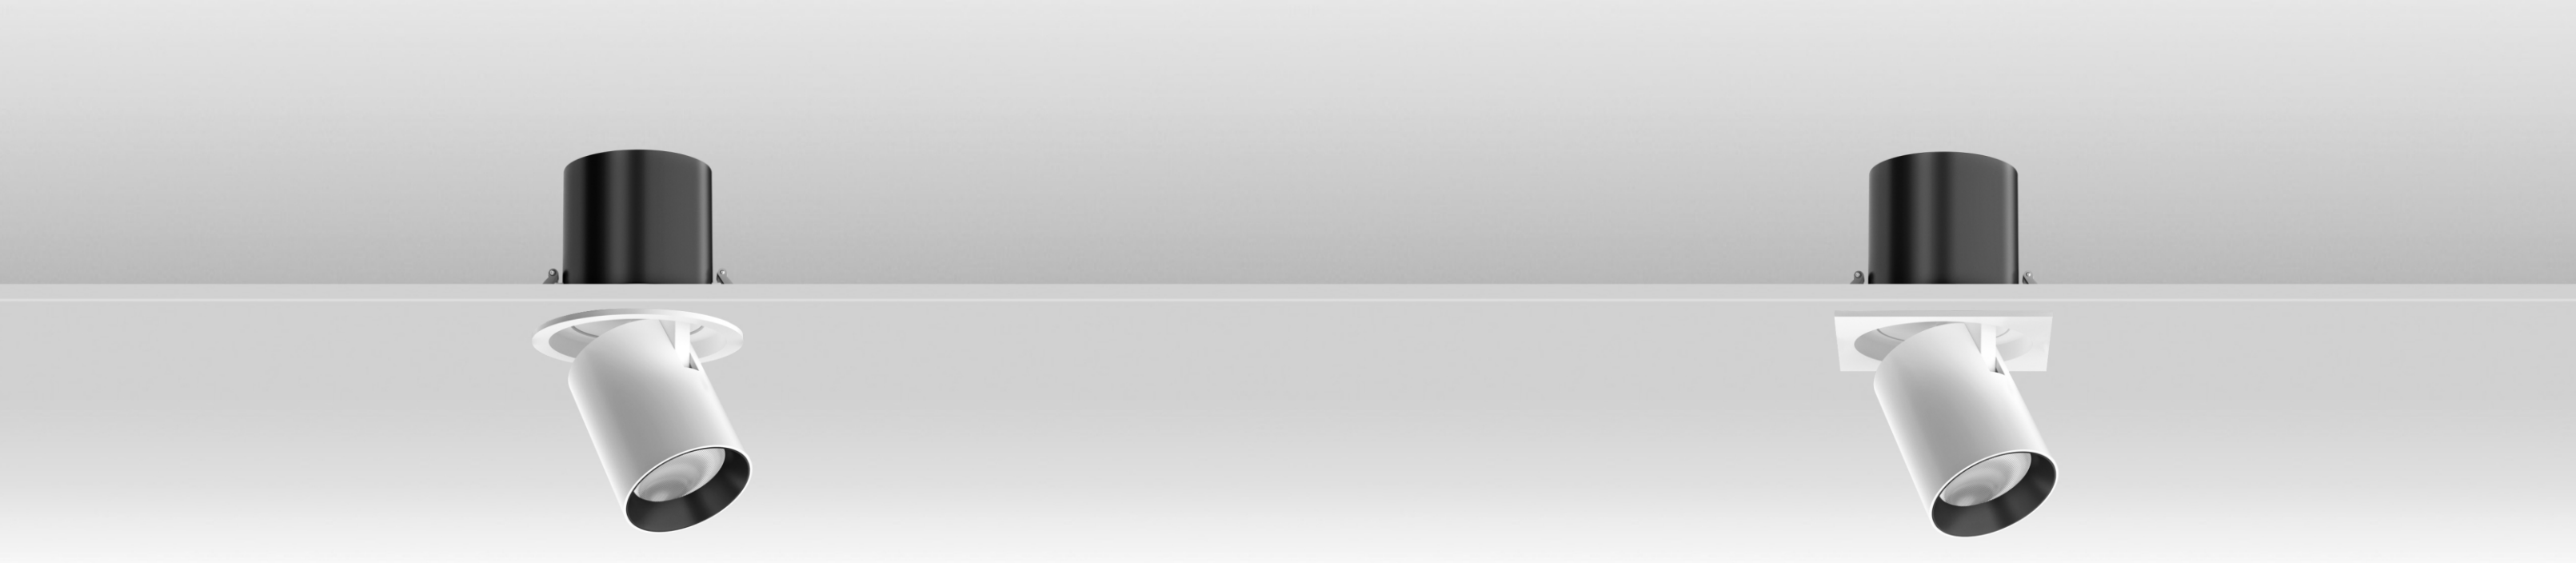

STYLE Spotlight



- Telescopic Function:Hidden up and down design with perfect operation experience to bring the sight to where you focus on.
- Unique Construction: 90°tilt and 355°rotation. The rotatable Downlight is perfect for sloped ceilings as the LED can pivot and rotate for illumination where you need

▶

12°

24°

38°

COB

IP20

▶

0-10V

DALI

▶

220V

UGR<19

CRI≥90

350°

90°

▶

Code	Watt	Lumen(lm)	Optic	Size(AxCmm)	Cut-out(mm)
8834 311	12W	945lm	12°/ 24°/ 38°	Ø100x120	Ø90
8834 321	25W	2150lm	12°/ 24°/ 38°	Ø130x135	Ø120

CCT

3000K

4000K


6000K

Color

White

Black

STYLE Spotlight



- Telescopic Function:Hidden up and down design with perfect operation experience to bring the sight to where you focus on.
- Unique Construction: 90°tilt and 355°rotation. The rotatable Downlight is perfect for sloped ceilings as the LED can pivot and rotate for illumination where you need

▶

12°

24°

38°

COB

IP20

▶

0-10V

DALI

▶

220V

UGR<19

CRI≥90

350°

90°

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8834 314	12W	945lm	12°/ 24°/ 38°	100x100x120	Ø90
8834 324	25W	2150lm	12°/ 24°/ 38°	130x130x135	Ø120

CCT

3000K


4000K

6000K


Color

White

Black

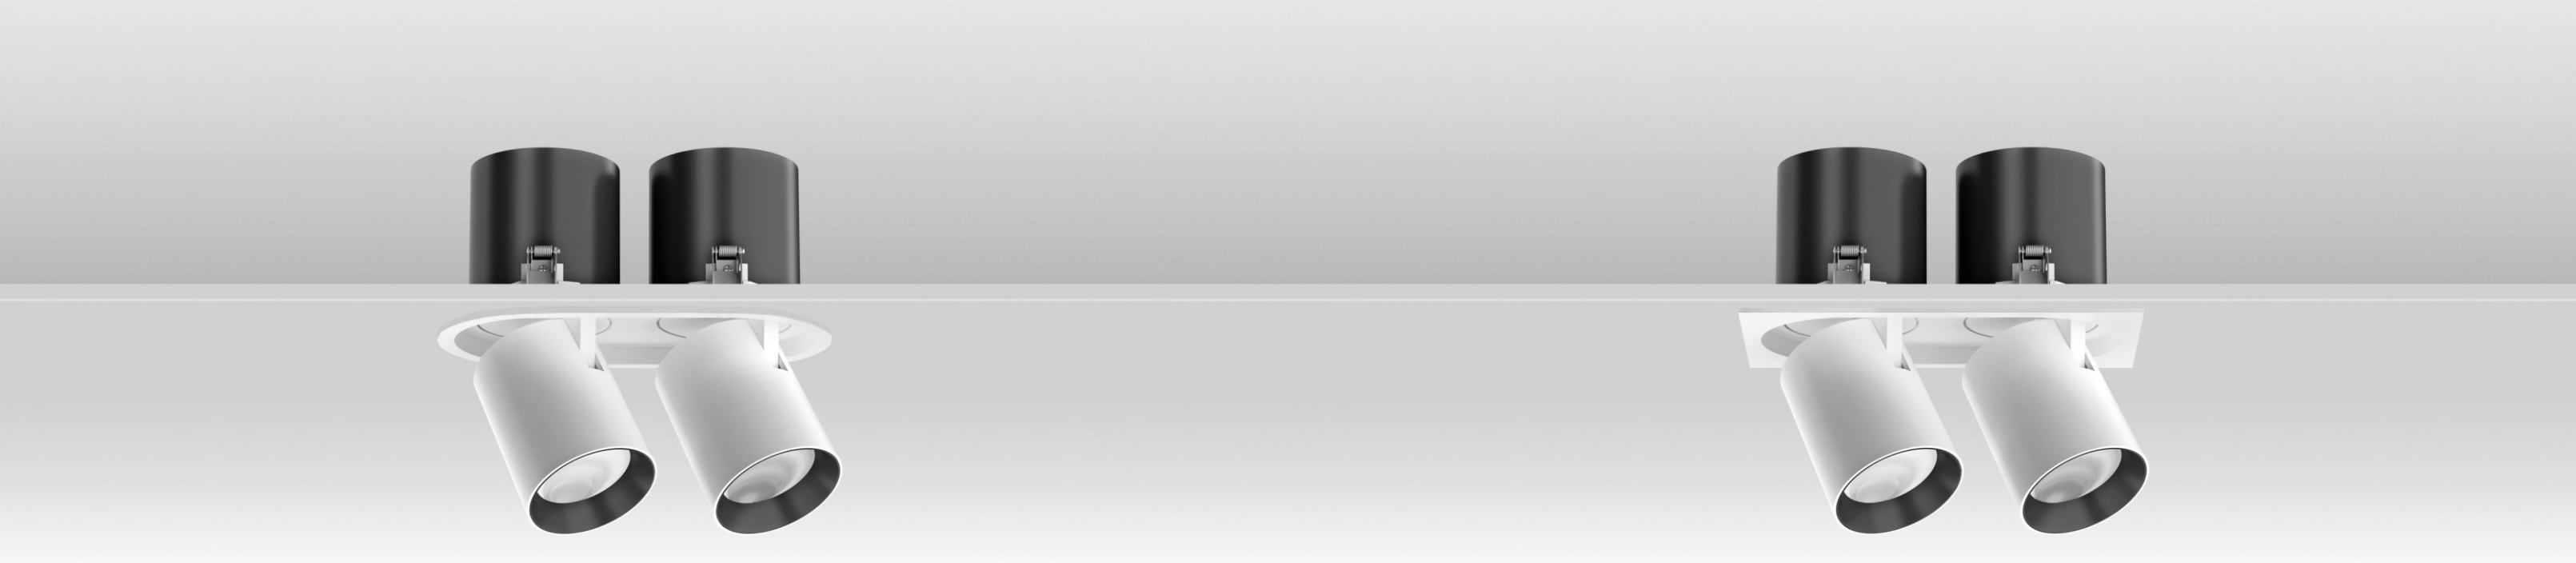

STYLE Spotlight



- Telescopic Function:Hidden up and down design with perfect operation experience to bring the sight to where you focus on.
- Unique Construction: 90°tilt and 355°rotation. The rotatable Downlight is perfect for sloped ceilings as the LED can pivot and rotate for illumination where you need

▶

12°

24°

38°

IP20

▶

DALI

▶

220V

UGR<19

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8834 312	2x12W	1890lm	12°/ 24°/ 38°	185x100x120	175x90
8834 322	2x25W	4300lm	12°/ 24°/ 38°	240x130x135	230x120

CCT

3000K

4000K


6000K

Color

White

Black

STYLE Spotlight



- Telescopic Function:Hidden up and down design with perfect operation experience to bring the sight to where you focus on.
- Unique Construction: 90°tilt and 355°rotation. The rotatable Downlight is perfect for sloped ceilings as the LED can pivot and rotate for illumination where you need

▶

12°

24°

38°

IP20

▶

DALI

▶

220V

UGR<19

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8834 315	2x12W	1890lm	12°/ 24°/ 38°	185x100x120	175x90
8834 325	2x25W	4300lm	12°/ 24°/ 38°	240x130x135	230x120

CCT

3000K


4000K

6000K


Color

White

Black

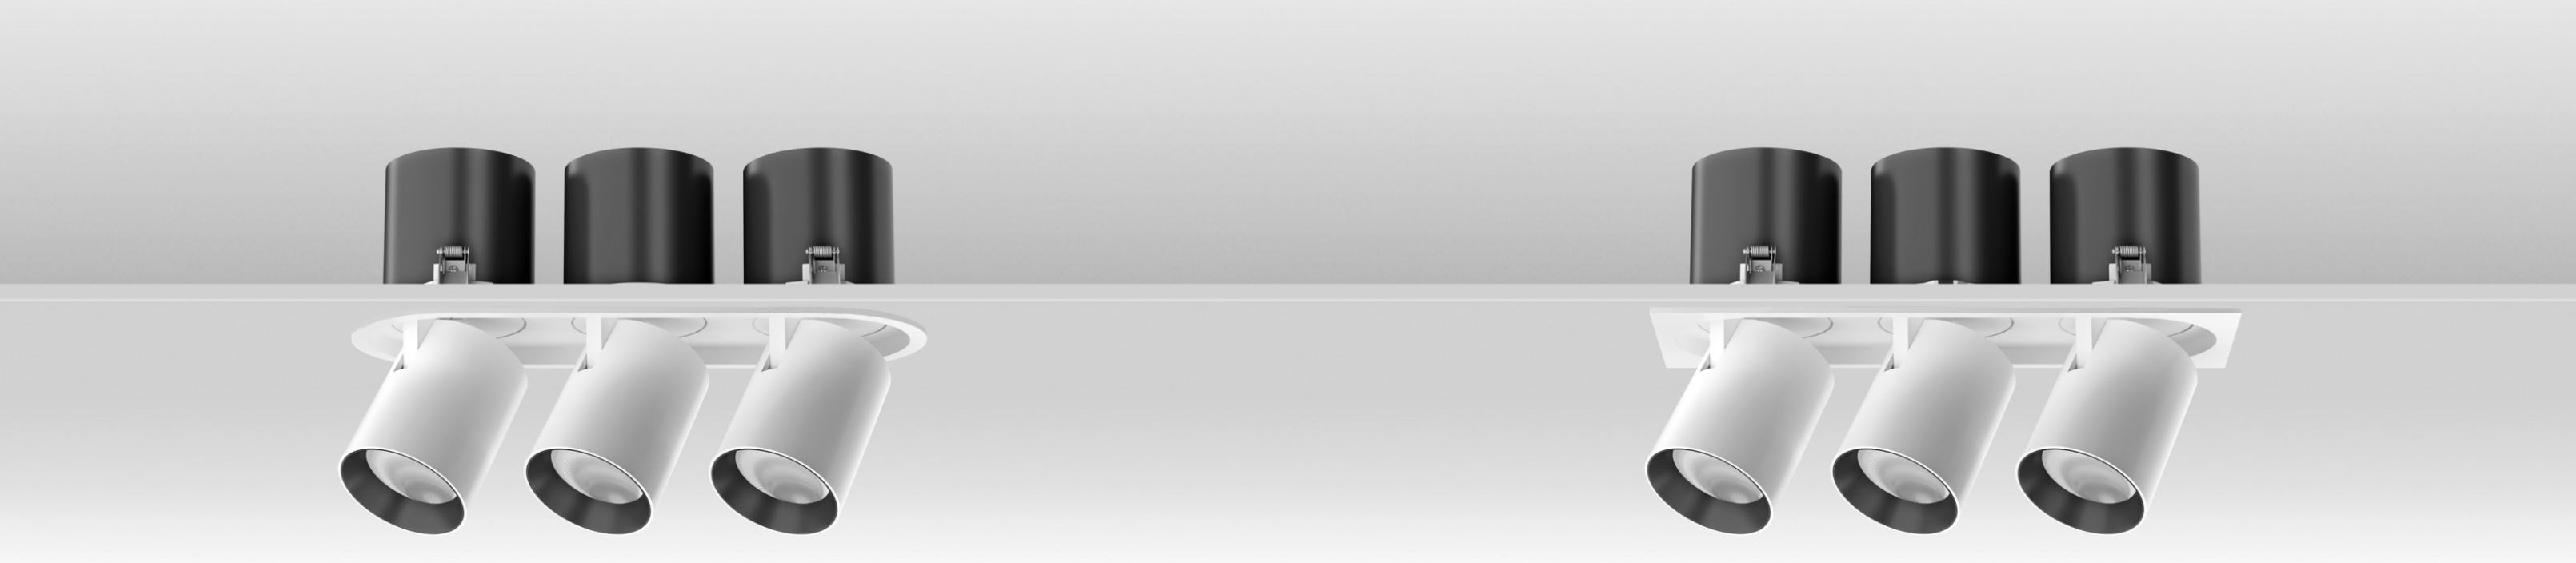

STYLE Spotlight

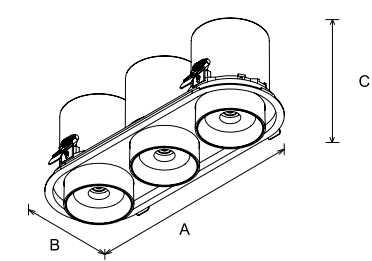

- Telescopic Function:Hidden up and down design with perfect operation experience to bring the sight to where you focus on.
- Unique Construction: 90°tilt and 355°rotation. The rotatable Downlight is perfect for sloped ceilings as the LED can pivot and rotate for illumination where you need

▶

12°

24°

38°

COB

IP20

▶

0-10V

DALI

▶

220V

UGR<19

CRI≥90

350°

90°

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8834 313	3x12W	2835lm	12°/ 24°/ 38°	270x100x120	260x90
8834 323	3x25W	6450lm	12°/ 24°/ 38°	345x130x135	335x120

CCT

3000K

4000K


6000K

Color

White

Black

STYLE Spotlight

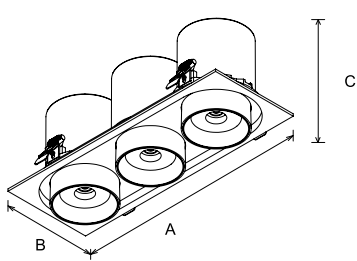

- Telescopic Function:Hidden up and down design with perfect operation experience to bring the sight to where you focus on.
- Unique Construction: 90°tilt and 355°rotation. The rotatable Downlight is perfect for sloped ceilings as the LED can pivot and rotate for illumination where you need

▶

12°

24°

38°

COB

IP20

▶

0-10V

DALI

▶

220V

UGR<19

CRI≥90

350°

90°

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8834 316	3x12W	2835lm	12°/ 24°/ 38°	270x100x120	260x90
8834 326	3x25W	6450lm	12°/ 24°/ 38°	345x130x135	335x120

CCT

3000K

4000K

6000K

Color


White

Black




LED Grille Spotlight –Series–

- Multi-head gimbal luminaires give you flexibility, including the ability to mix a variety of beam angles (including an asymmetric distribution for wallwashing) and CCT to achieve different lighting goals.
- Reliable Material: Die-cast aluminum material guarantees corrosion protection and rust prevention. The heat sink is composed of it will cool fuller and faster.
- Adjustable design: 25°tilt and 350°rotation. The rotatable Downlight is perfect for sloped ceilings as the LED can pivot and rotate for illumination where you need.

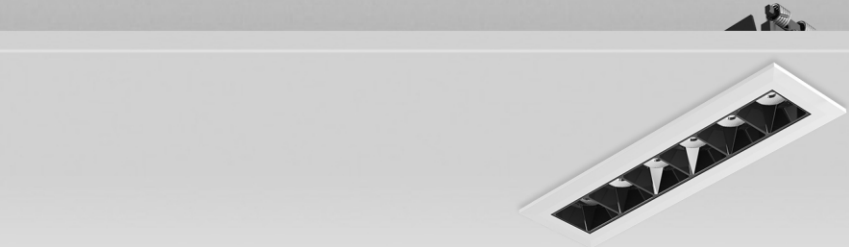

OWEN Grille Spotlight



- Smart home without main light series, can realize remote control.
- Diversified functional configuration, fixed or swing angle optional.
- Precision die-cast aluminum lamp body, anti-rust and better heat dissipation.
- With independent intellectual property rights and appearance patents, the appearance is stylish.

▶

24°

36°

▶

SMD

IP20

▶

0-10V

DALI

▶

220V

UGR<9

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8833 381	6W	350lm	24°/ 36°	125x36x33	120x30

CCT

Adjustable 2700K-6500K


Color

White

Black



OWEN Grille Spotlight



- Smart home without main light series, can realize remote control.
- Diversified functional configuration, fixed or swing angle optional.
- Precision die-cast aluminum lamp body, anti-rust and better heat dissipation.
- With independent intellectual property rights and appearance patents, the appearance is stylish.

▶

24°

36°

▶

SMD

IP20

▶

0-10V

DALI

▶

220V

UGR<9

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8833 382	6W	280lm	SIDE LIGHT	125x36x33	120x30

CCT

Adjustable 2700K-6500K


Color

White

Black



OWEN Grille Spotlight



- Smart home without main light series, can realize remote control.
- Diversified functional configuration, fixed or swing angle optional.
- Precision die-cast aluminum lamp body, anti-rust and better heat dissipation.
- With independent intellectual property rights and appearance patents, the appearance is stylish.




Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8834 341	12W	690lm	24°/ 36°	233x36x33	228x30

CCT ———— Adjustable 2700K-6500K


Color ———— White Black



OWEN Grille Spotlight



- Smart home without main light series, can realize remote control.
- Diversified functional configuration, fixed or swing angle optional.
- Precision die-cast aluminum lamp body, anti-rust and better heat dissipation.
- With independent intellectual property rights and appearance patents, the appearance is stylish.

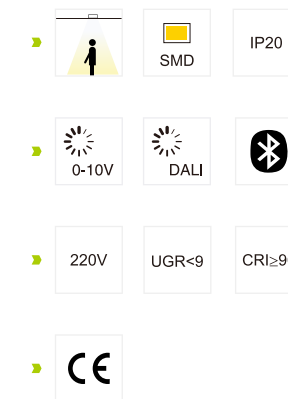


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8834 342	12W	690lm	SIDE LIGHT	233x36x33	228x30

CCT ———— Adjustable 2700K-6500K

Color ———— White Black



OWEN Grille Spotlight



- Smart home without main light series, can realize remote control.
- Diversified functional configuration, fixed or swing angle optional.
- Precision die-cast aluminum lamp body, anti-rust and better heat dissipation.
- With independent intellectual property rights and appearance patents, the appearance is stylish.

▶

24°

36°

SMD

IP20

▶

0-10V

DALI

▶

220V

UGR<9

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8833 371	6W	340lm	24°/ 36°	136x47x34	130x40

CCT ———

Adjustable 2700K-6500K


Color ———

White

Black



OWEN Grille Spotlight



- Smart home without main light series, can realize remote control.
- Diversified functional configuration, fixed or swing angle optional.
- Precision die-cast aluminum lamp body, anti-rust and better heat dissipation.
- With independent intellectual property rights and appearance patents, the appearance is stylish.

▶

24°

36°

SMD

IP20

▶

0-10V

DALI

▶

220V

UGR<9

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8833 372	6W	280lm	SIDE LIGHT	136x47x34	130x40


CCT ———

Adjustable 2700K-6500K


Color ———

White

Black

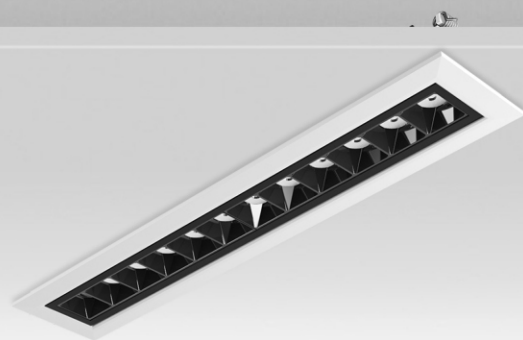

OWEN Grille Spotlight

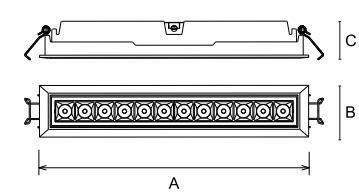

- Smart home without main light series, can realize remote control.
- Diversified functional configuration, fixed or swing angle optional.
- Precision die-cast aluminum lamp body, anti-rust and better heat dissipation.
- With independent intellectual property rights and appearance patents, the appearance is stylish.

▶

24°

36°

▶

SMD

IP20

▶

0-10V

DALI

▶

220V

UGR<9

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8833 391	12W	690lm	24°/ 36°	244x47x34	240x40


CCT ———

Adjustable 2700K-6500K


Color ———

White

Black

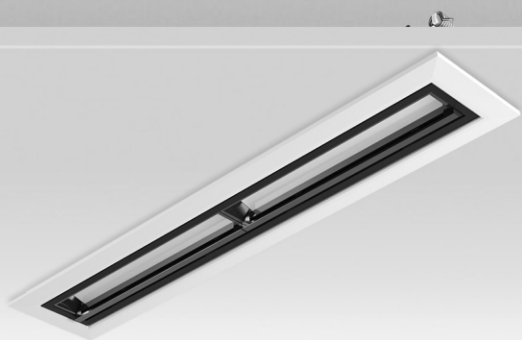

OWEN Grille Spotlight

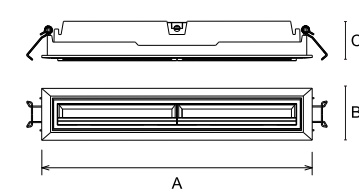

- Smart home without main light series, can realize remote control.
- Diversified functional configuration, fixed or swing angle optional.
- Precision die-cast aluminum lamp body, anti-rust and better heat dissipation.
- With independent intellectual property rights and appearance patents, the appearance is stylish.

▶

24°

36°

▶

SMD

IP20

▶

0-10V

DALI

▶

220V

UGR<9

CRI≥90

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Cut-out(mm)
8833 392	12W	560lm	SIDE LIGHT	244x47x34	240x40

CCT ———

Adjustable 2700K-6500K

Color ———

White

Black



LED Tracklight –Series–


- Excellent optical design, reflector with precision injection and surface vacuum plating.
- Looking good anywhere: Its simple shape is neutral and widely generic to fit in different spaces.
- The track spotlight offers a wide choice of beam angles, colour temperatures, colour rendering options and optical accessories.
- Make the colors POP: Perfect color match gets better reproduction across the spectrum.




CCT Turnable

FURINO Tracklight

NEW

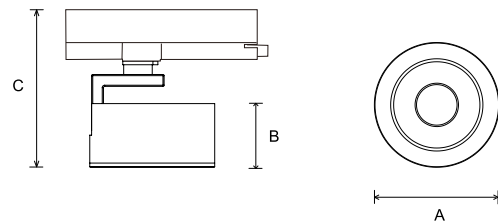

- Integrated die-casting aluminium body.
- CCT Changeable with swith on the lamp bodyHigh lumen efficiency.
- 2wires/3wires/4wires adapter are available.
- Swingable 0~90°, Rotating 0~355°.
- TR lens optical technology.

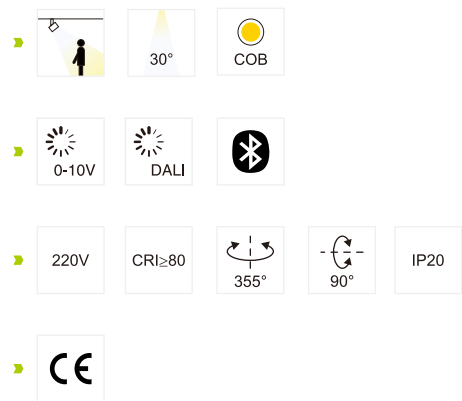

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8617 301	15W	1500lm	30°	Ø80x64.5x148	2/3/4-circuits
8617 302	20W	2000lm	30°	Ø80x64.5x148	2/3/4-circuits
8617 303	30W	3000lm	30°	Ø105x54x136	2/3/4-circuits
8617 304	40W	4000lm	30°	Ø130x54x136	2/3/4-circuits


CCT — 3000K 4000K 5700K

Color — White Black




CAPHIS Tracklight

NEW

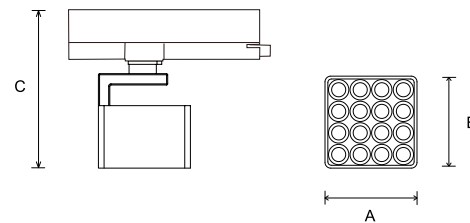

- Anti-glare.
- Integrated die-casting aluminium body.
- 2wires/3wires/4wires adapter are available.
- Swingable 0~90°, Rotating 0~355°.
- High energy-efficiency large-area light-emitting.

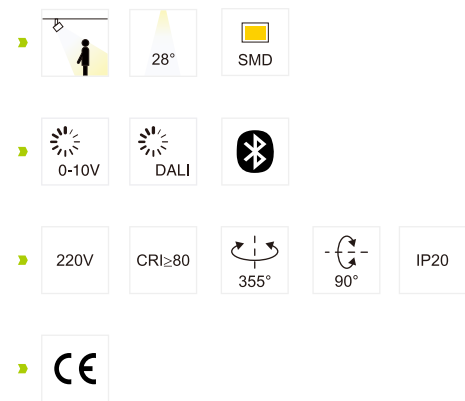


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8618 301	20W	1800lm	28°	80x80x138	2/3/4-circuits
8618 302	30W	2700lm	28°	100x100x138	2/3/4-circuits

CCT — 3000K 4000K 5700K

Color — White Black



MIGOS Tracklight NEW

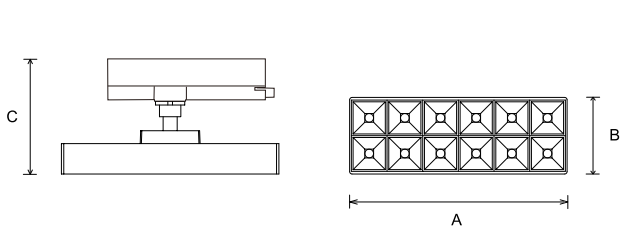

- Anti-glare.
- Integrated die-casting aluminium body.
- 2wires/3wires/4wires adapter are available.
- Swingable 0~90°, Rotating 0~355°.
- High energy-efficiency large-area light-emitting.

▶

▶

▶

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8619 301	20W	1600lm	80°	185x64.5x113	2/3/4-circuits
8619 302	30W	2400lm	80°	275x64.5x113	2/3/4-circuits
8619 303	40W	3200lm	80°	305x64.5x113	2/3/4-circuits

CCT

3000K

4000K


5700K

Color

White

Black




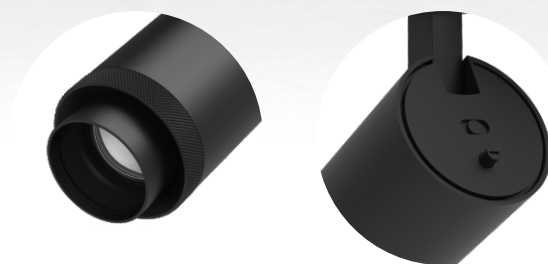


15°to 60°ZOOMABLE

CCT Turnable

ODELL Tracklight NEW



- 15°~60°zoomable spotlight, adapt to different enviornments and adjust the lighting size of different apertures.
- With normal front ring and zoomable front ring for your option, 2 functions in one luminary.
- CCT Changeable with swith on the lamp bodyHigh lumen effiency.

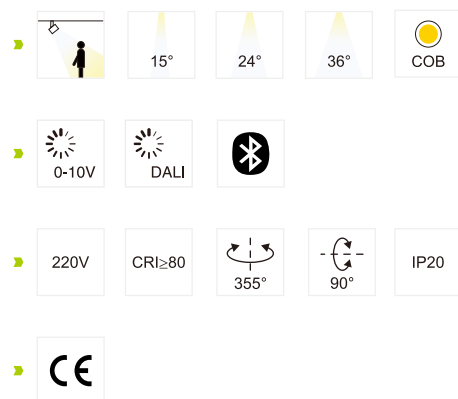


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8616 301	15W	1080lm	15°/ 24°/ 36°	Ø60x126x128	2/3/4-circuits
8616 302	18W	1620lm	15°/ 24°/ 36°	Ø73x155.7x141	2/3/4-circuits
8616 303	35W	3150lm	15°/ 24°/ 36°	Ø80x199.6x148	2/3/4-circuits


CCT ——— 3000K 4000K 5700K

Color ——— White Black

ODELL Tracklight NEW



- 15°~60°zoomable spotlight, adapt to different enviornments and adjust the lighting size of different apertures.
- With normal front ring and zoomable front ring for your option, 2 functions in one luminary.
- CCT Changeable with swith on the lamp bodyHigh lumen effiency.

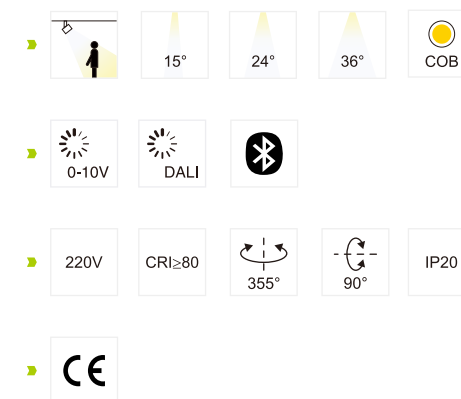


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8616 301	12W	960lm	15°-60°	Ø60x125x128	2/3/4-circuits
8616 302	18W	1440lm	15°-60°	Ø73x151.5x141	2/3/4-circuits
8616 303	35W	2800lm	15°-60°	Ø80x180x141	2/3/4-circuits

CCT ——— 3000K 4000K 5700K

Color ——— White Black



KOPPA Tracklight



- Thickedned aluminum lamp body
- 2wires/3wires/4wires adapter are available
- Easily adjust lighting angle with track sliding

▶

15°

24°

36°

▶

0-10V

DALI

▶

220V

CRI≥80

355°

90°

IP20

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8651 301	10W	950lm	15°/ 24°/ 36°	Ø49x138x124	2/3/4-circuits
8651 302	20W	1600lm	15°/ 24°/ 36°	Ø65x158x140	2/3/4-circuits
8651 303	30W	2500lm	15°/ 24°/ 36°	Ø76x178x151	2/3/4-circuits

CCT ———

3000K

4000K

Color ———

White


Black






15°to 60°ZOOMABLE

SAKURA Tracklight



- 15°to 60°stepless Zoomable
- Die-cast aluminum
- Overall heat dissipation
- Competitive construction with high quality

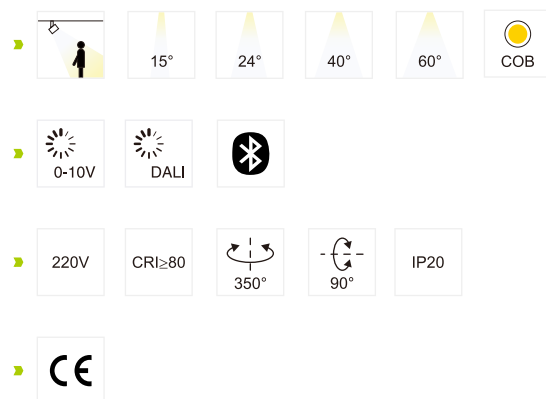

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8631 304D	10W	800lm	15°- 60°	Ø60x126x127	2/3/4-circuits
8631 304E	15W	1350lm	15°- 60°	Ø60x139x127	2/3/4-circuits
8631 304F	20W	1750lm	15°- 60°	Ø60x148x127	2/3/4-circuits


CCT — 3000K 4000K 6000K

Color — White Black




15°to 60°ZOOMABLE

SAKURA Tracklight



- 15°to 60°stepless Zoomable
- Die-cast aluminum
- Overall heat dissipation
- Competitive construction with high quality

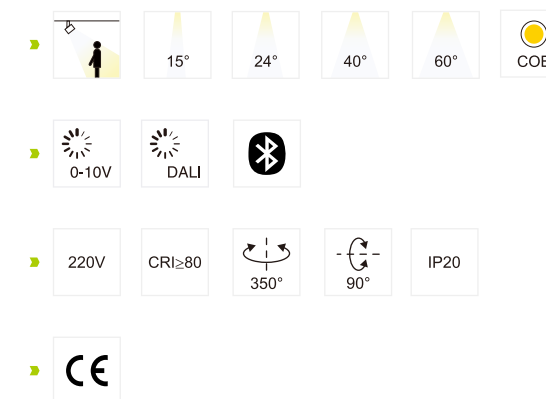


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8631 305A	30W	2550lm	15°- 60°	Ø84x245x145	2/3/4-circuits
8631 305C	40W	3400lm	15°- 60°	Ø84x278x145	2/3/4-circuits

CCT — 3000K 4000K 6000K

Color — White Black



PALLAS Tracklight



- Offer a wide choice of beam angles, colour temperatures, brands of light source and driver as well as anti-glare accessories.
- Set damping mechanism in the lamp body rotation structure, strengthen the operation experience.

▶

15°

24°

36°

IP20

▶

DALI

▶

220V

UGR<16

CRI≥90

▶

SAA

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8696 301	10W	945lm	15°/ 24°/ 36°	Ø95x63x145	2/3/4-circuits
8696 302	20W	1760lm	15°/ 24°/ 36°	Ø95x63x145	2/3/4-circuits
8696 303	30W	2830lm	15°/ 24°/ 36°	Ø115x75x145	2/3/4-circuits
8696 304	40W	3810lm	15°/ 24°/ 36°	Ø115x75x145	2/3/4-circuits

Optical Accessories

Honey Comb

Frosted Softening Lens

Rhomge Lens

EllipticalLens

Chrome

ChampagneGold

BlackLight

CCT

3000K

4000K

Color


White

Black






CUBUS Tracklight NEW



- Reliable material
- Multiple installation
- Excellent performance
- Competitive construction with high quality

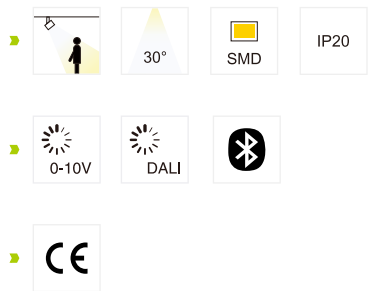

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8632 301	7W	630lm	36°	Ø49x90x125	2-circuits
8632 301	15W	1350lm	36°	Ø49x110x125	2-circuits
8632 311	20W	1800lm	36°	Ø61x155x140	2-circuits
8632 304	30W	2700lm	36°	Ø74x175x147	2-circuits


CCT — 3000K 4000K

Color — ☐ White ☒ Black






SMART-T Tracklight



- Reliable material
- Multiple installation
- Excellent performance
- Competitive construction with high quality

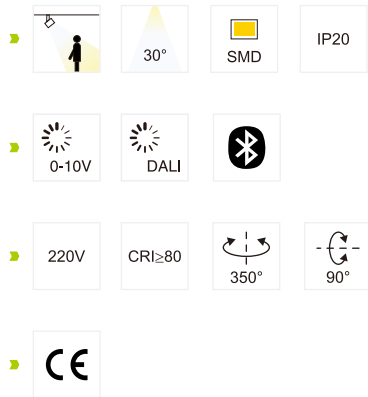


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8631 301	5W	375lm	30°	Ø50x79x116	2/3-circuits
8631 301	7W	520lm	30°	Ø50x79x116	2/3-circuits


CCT 3000K 4000K

Color White Black

SMART-T Tracklight



- Reliable material
- Multiple installation
- Excellent performance
- Competitive construction with high quality

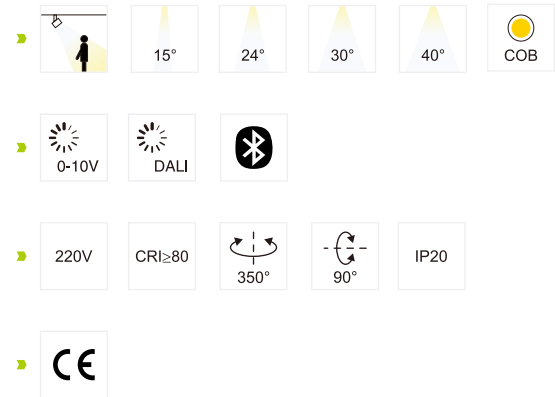


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8631 301	9W	720lm	15°/ 24°/ 40°	Ø50x85x115	2/3-circuits
8631 302	12W	940lm	15°/ 24°/ 40°	Ø50x110x117	2/3-circuits
8631 311	15W	1360lm	15°/ 24°/ 40°	Ø60x127x123	2/3-circuits
8631 304	20W	1640lm	30°	Ø60x132x137	2/3-circuits
8631 305	30W	2690lm	30°	Ø73x150x167	2/3-circuits

CCT 3000K 4000K


Color White Black



SMART-T Tracklight



- Reliable material
- Multiple installation
- Excellent performance
- Competitive construction with high quality

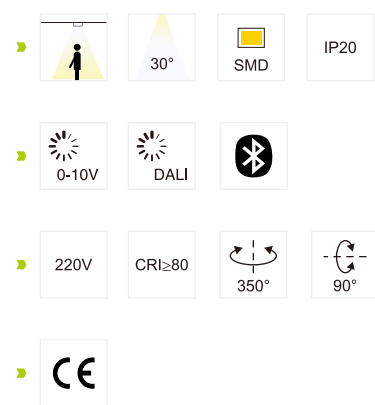


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8731 301	5W	375lm	30°	Ø50x79x106	surface mounted
8731 301	7W	520lm	30°	Ø50x79x106	surface mounted

CCT — 3000K 4000K


Color — White Black



SMART-T Tracklight



- Reliable material
- Multiple installation
- Excellent performance
- Competitive construction with high quality

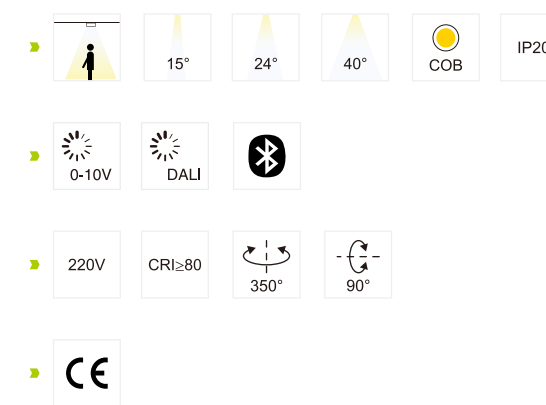

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8731 301	9W	720lm	15°/ 24°/ 40°	Ø50x85x108	surface mounted


CCT — 3000K 4000K

Color — White Black



LED Linear Light –Series–



- LED line lights enable you to create an endless shadowless, seamless lighting system. All lamp modules ensure high efficiency, low energy consumption and easy to use.
- LED line light can be used for general lighting, From offices to public, educational, retail and many other programs. Its extremely wide range of modules and accessories can keep you in high demand Use in different environments.

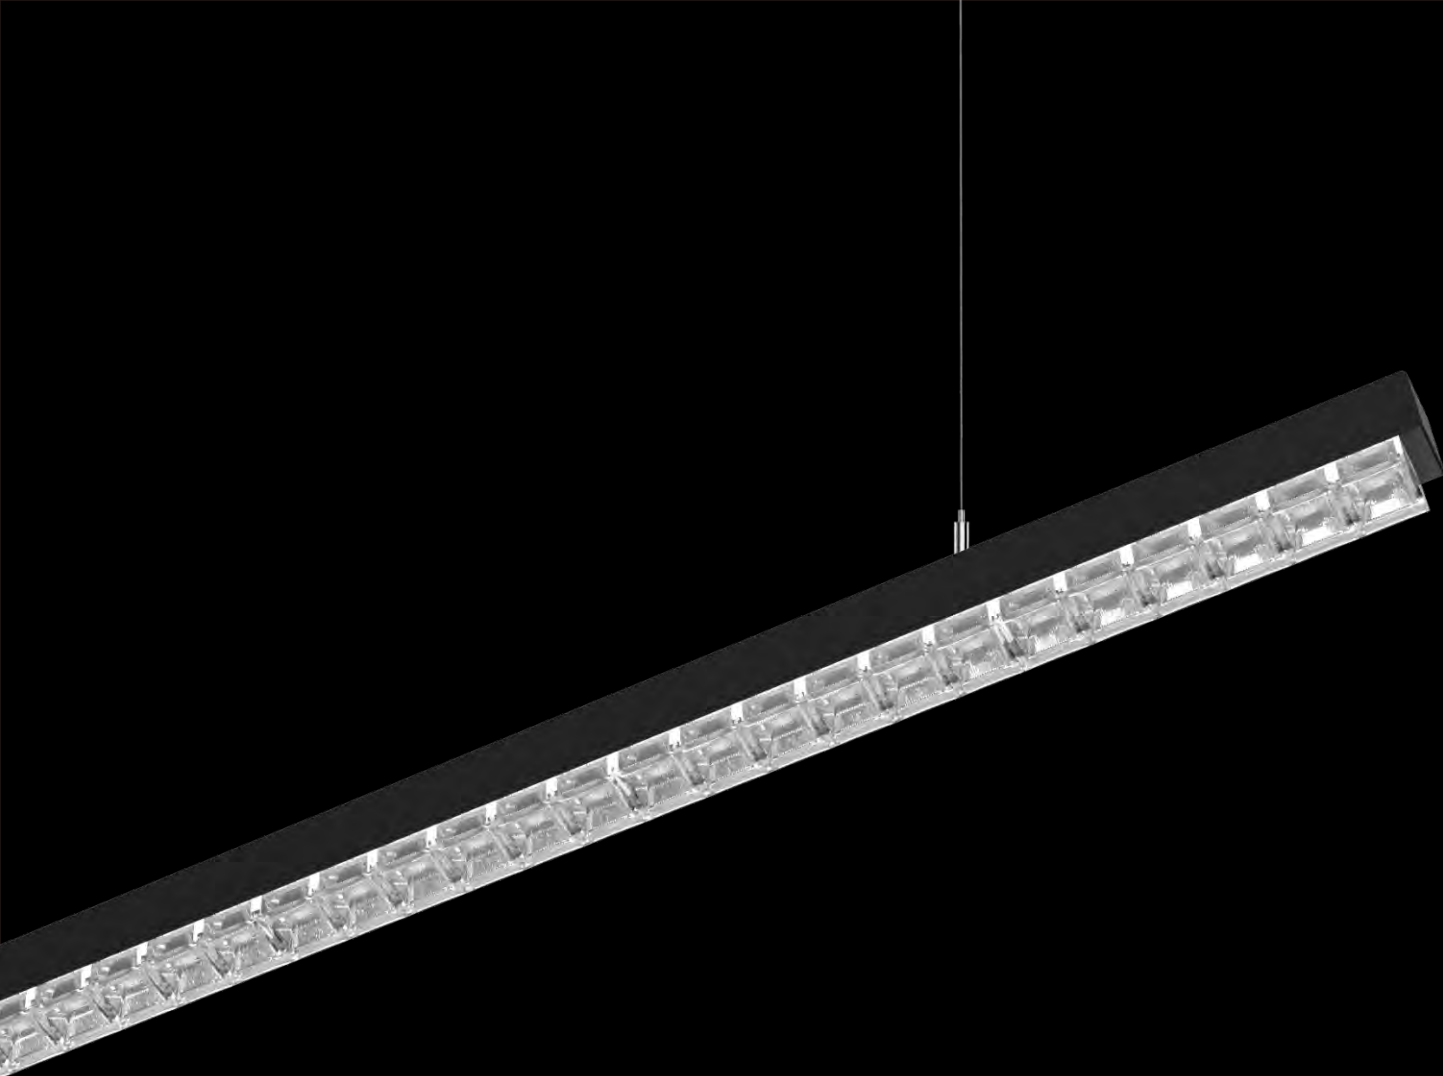


Novo Linear Light NEW

Two installation methods available:
pendant and surface mounted

The lens is covered with optical stripes to refract the light surface, which refracts peripheral light to improve light efficiency. The stripes are surrounded by transparent curved surfaces, showing a full crystal texture.

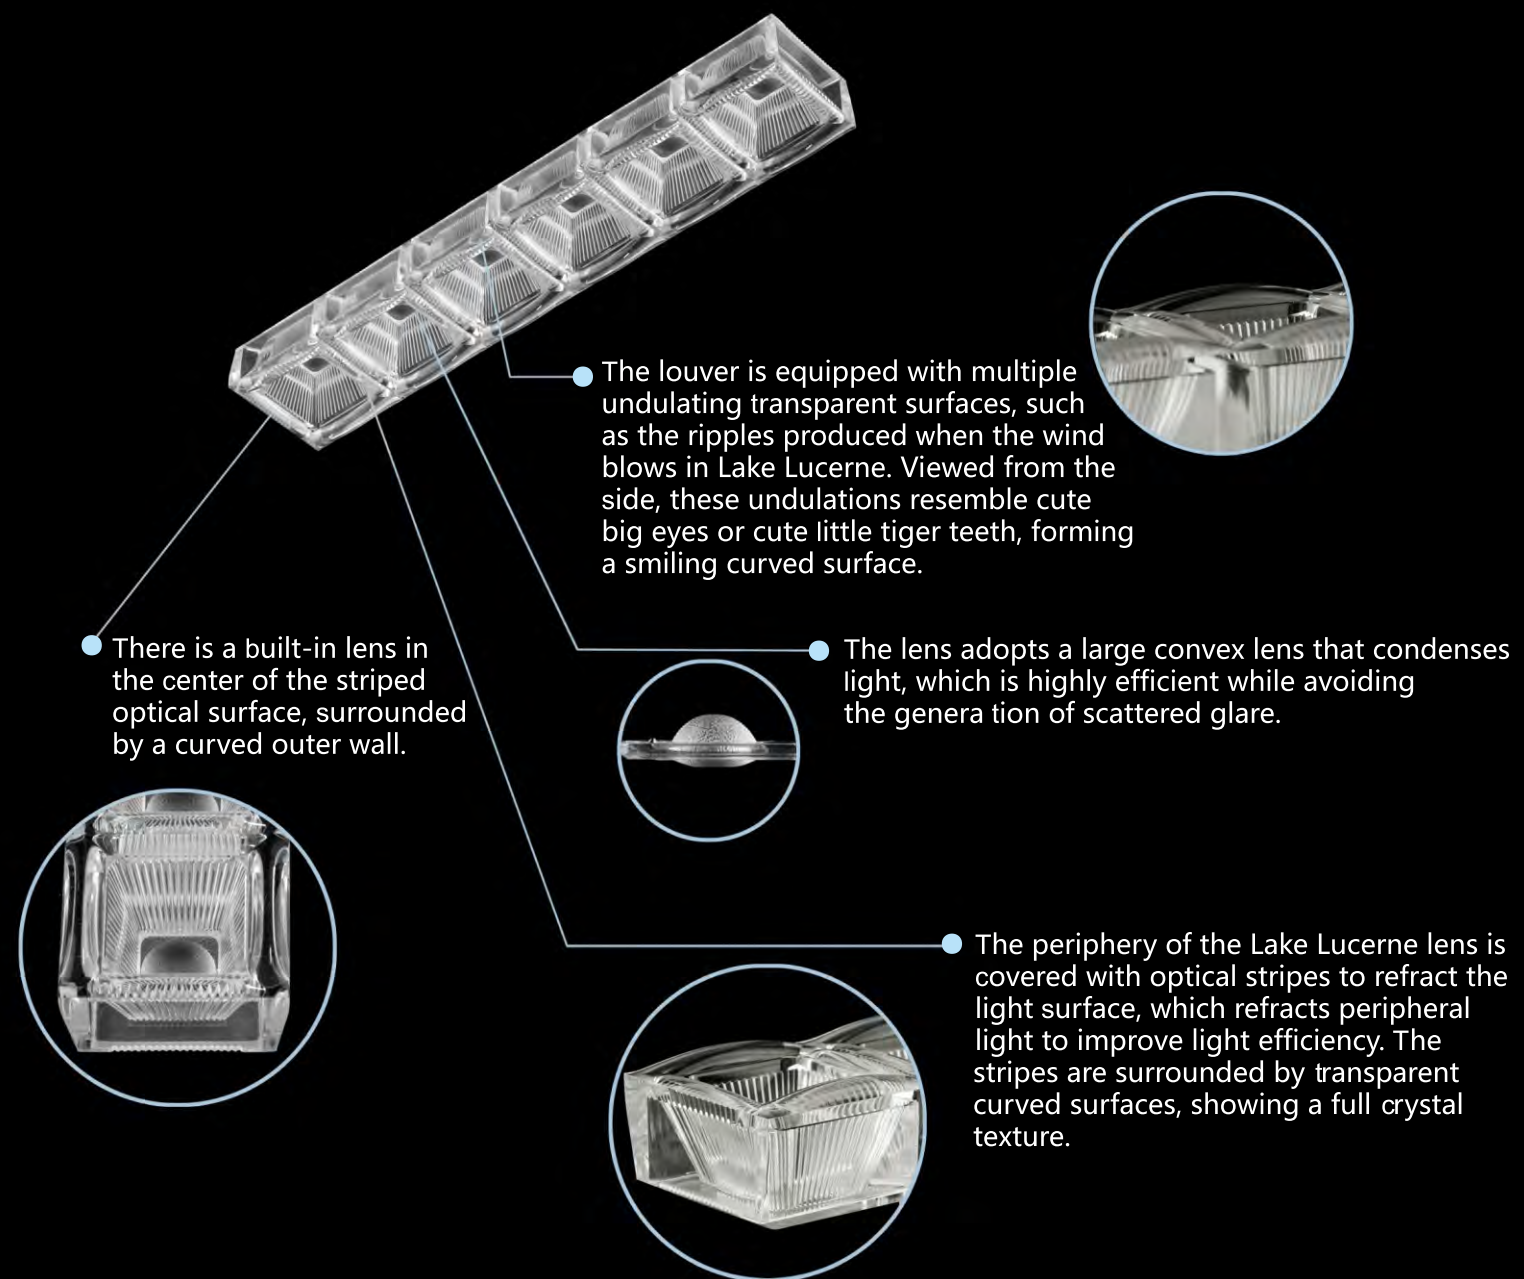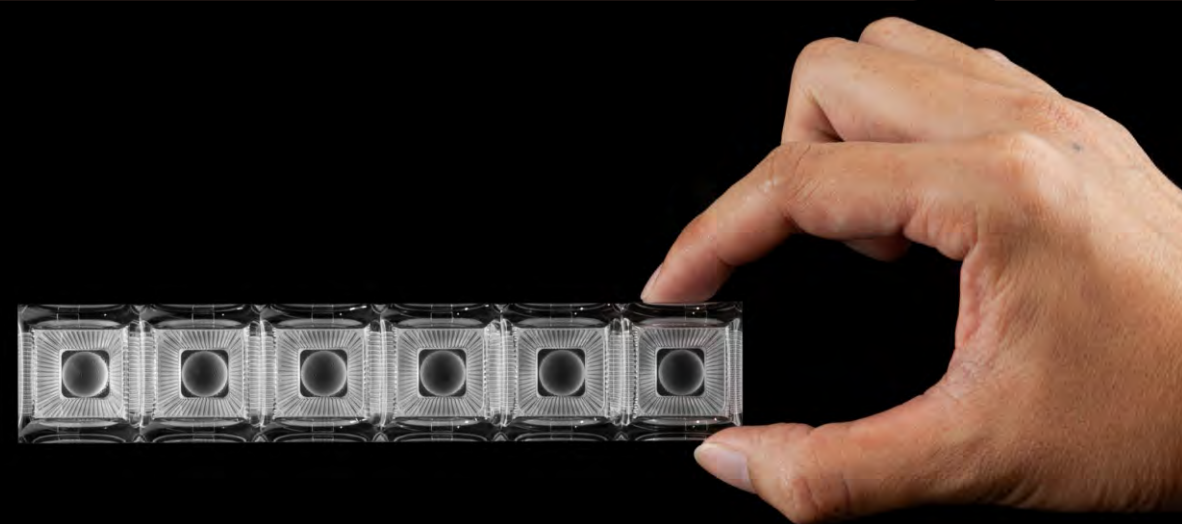

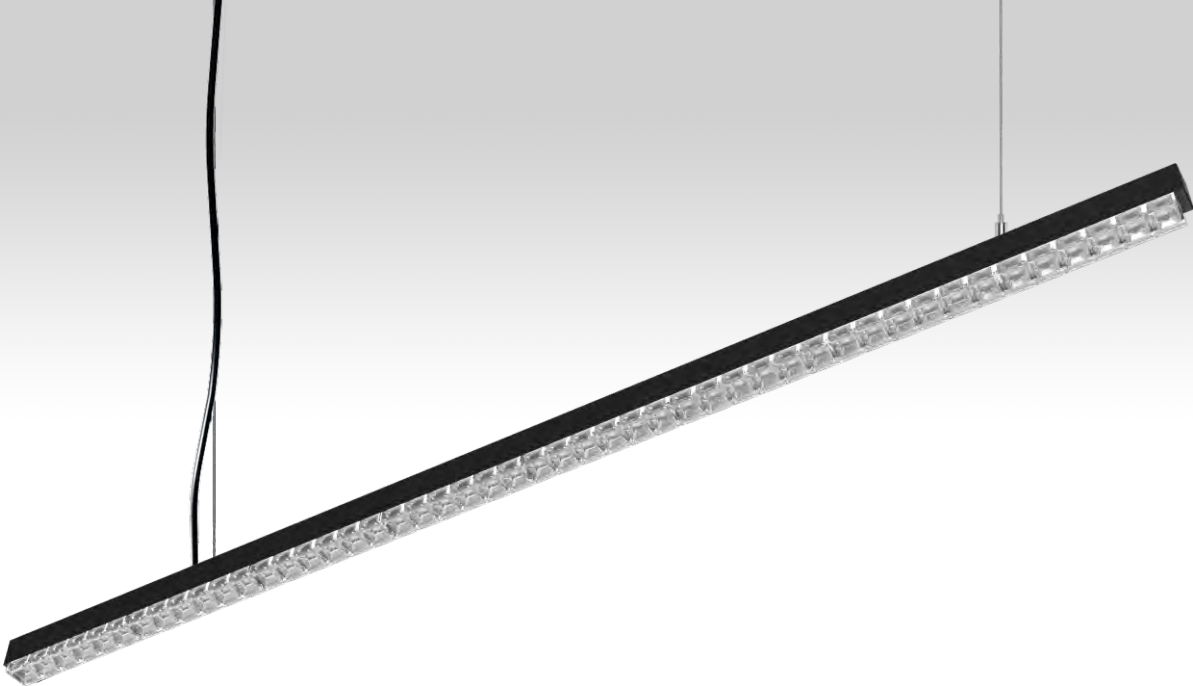


NOVO

Linear light

NEW

Straight Design

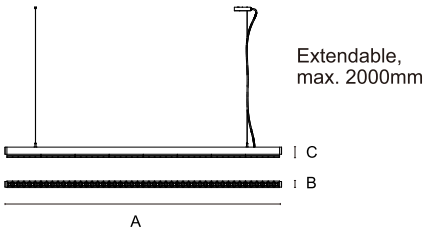

- Two installation methods available: pendant and surface mounted.
- Optional with backlight function.
- The light housing is made of high quality aluminum alloy material. Powder coating, corrosion resistance, easy to clean.
- The lens is covered with optical stripes to refract the light surface, which refracts peripheral light to improve light efficiency. The stripes are surrounded by transparent curved surfaces, showing a full crystal texture.
- 0-10V/DALI dimming from 10% to 100%. A good option for different environment atmosphere and eye protection. Ideal for wide spaces such as commercial office living room, restaurant and exhibition hall,etc.

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8717 309	40W	4000lm	60°	1273.6x30x46	pendant/surface mounted

CCT

3000K


4000K

5700K

Color

White

Black

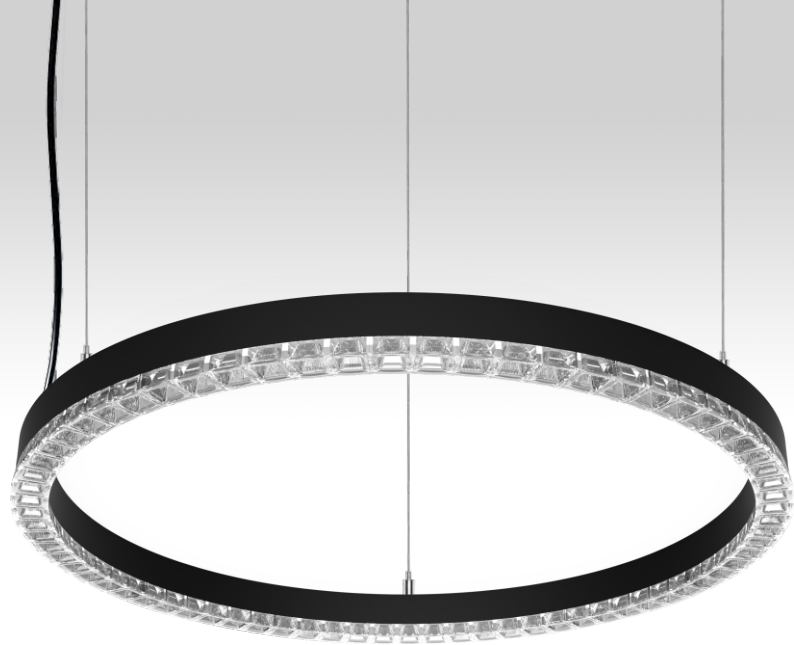


NOVO

Linear light

NEW

Rounded Design



- Two installation methods available: pendant and surface mounted.
- Optional with backlight function.
- The light housing is made of high quality aluminum alloy material. Powder coating, corrosion resistance, easy to clean.
- The lens is covered with optical stripes to refract the light surface, which refracts peripheral light to improve light efficiency. The stripes are surrounded by transparent curved surfaces, showing a full crystal texture.
- 0-10V/DALI dimming from 10% to 100%. A good option for different environment atmosphere and eye protection. Ideal for wide spaces such as commercial office living room, restaurant and exhibition hall,etc.

▶

60°

SMD

IP20

▶

0-10V

DALI

▶

220V

CRI≥90

▶

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8717 301	60W	6000lm	60°	Ø650x46	pendant/surface mounted
8717 302	80W	8000lm	60°	Ø850x46	pendant/surface mounted
8717 303	100W	10000lm	60°	Ø1050x46	pendant/surface mounted

CCT

3000K


4000K

5700K

Color

White

Black

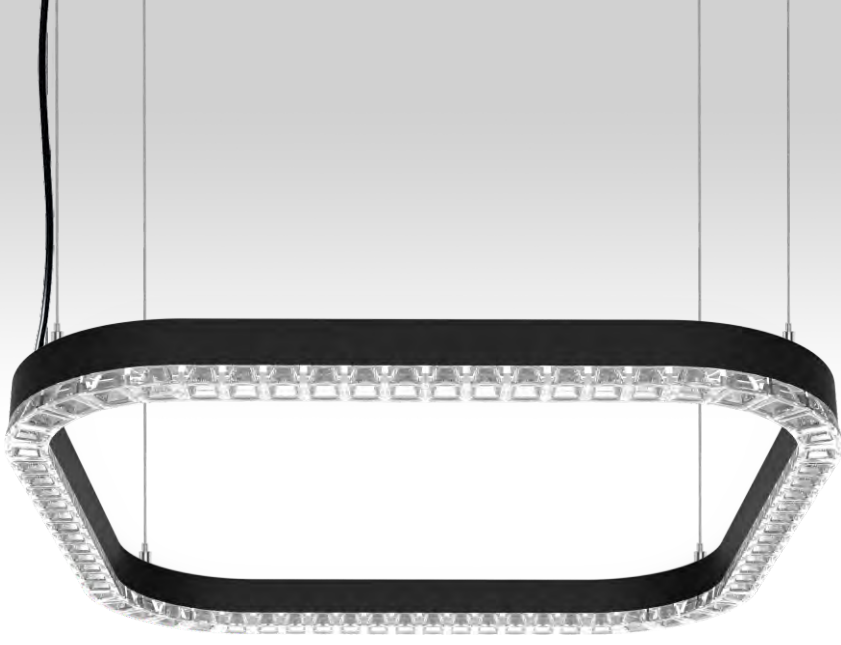


NOVO

Linear light

NEW

Square Design



- Two installation methods available: pendant and surface mounted.
- Optional with backlight function.
- The light housing is made of high quality aluminum alloy material. Powder coating, corrosion resistance, easy to clean.
- The lens is covered with optical stripes to refract the light surface, which refracts peripheral light to improve light efficiency. The stripes are surrounded by transparent curved surfaces, showing a full crystal texture.
- 0-10V/DALI dimming from 10% to 100%. A good option for different environment atmosphere and eye protection. Ideal for wide spaces such as commercial office living room, restaurant and exhibition hall,etc.

▶

60°

SMD

IP20

▶

0-10V

DALI

▶

220V

CRI≥90

▶

CE

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8717 304	60W	6000lm	60°	□593x46	pendant/surface mounted
8717 305	100W	10000lm	60°	□906x46	pendant/surface mounted
8717 306	150W	15000lm	60°	□1220x46	pendant/surface mounted

CCT

3000K


4000K

5700K

Color

White

Black

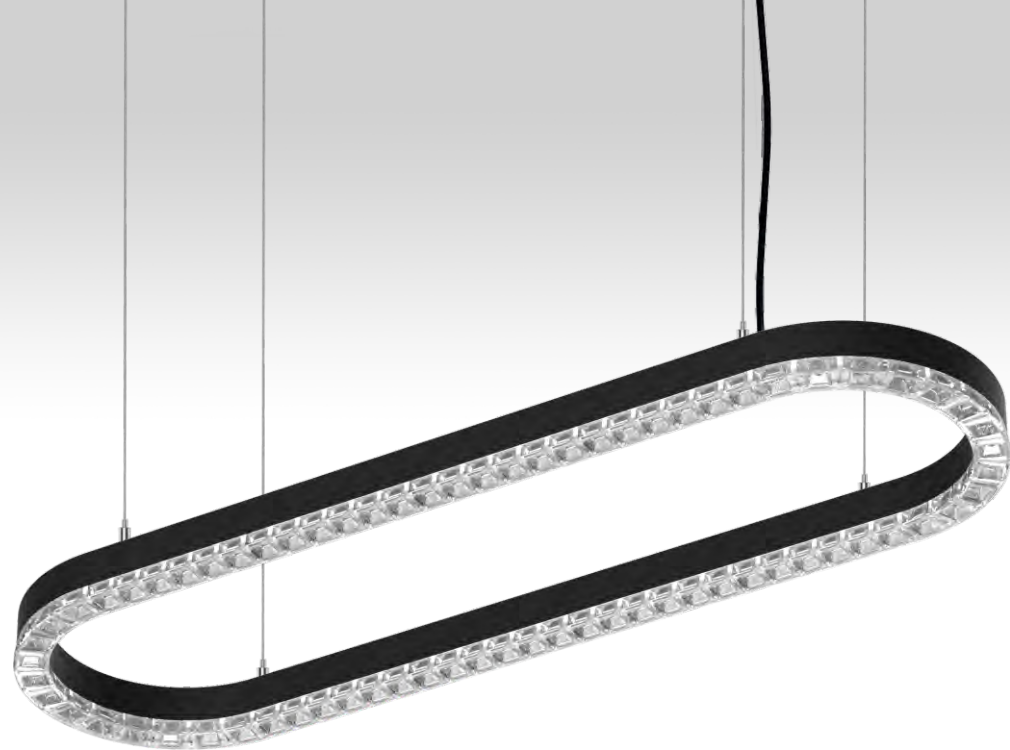


NOVO


Linear light

NEW

Oval Design

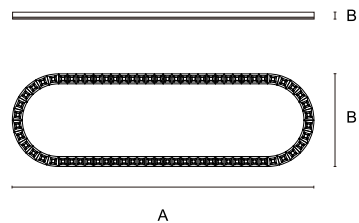

- Two installation methods available: pendant and surface mounted.
- Optional with backlight function.
- The light housing is made of high quality aluminum alloy material. Powder coating, corrosion resistance, easy to clean.
- The lens is covered with optical stripes to refract the light surface, which refracts peripheral light to improve light efficiency. The stripes are surrounded by transparent curved surfaces, showing a full crystal texture.
- 0-10V/DALI dimming from 10% to 100%. A good option for different environment atmosphere and eye protection. Ideal for wide spaces such as commercial office living room, restaurant and exhibition hall,etc.

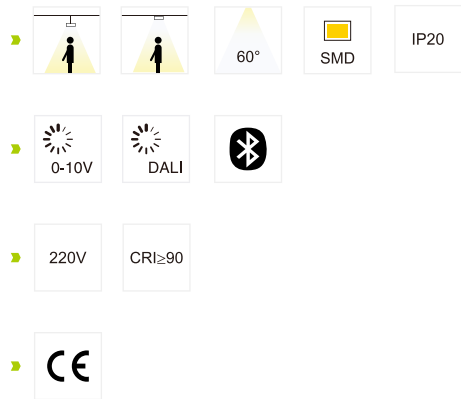

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8717 307	60W	6000lm	60°	906x278.4x46	pendant/surface mounted

CCT

3000K


4000K

5700K

Color

White

Black

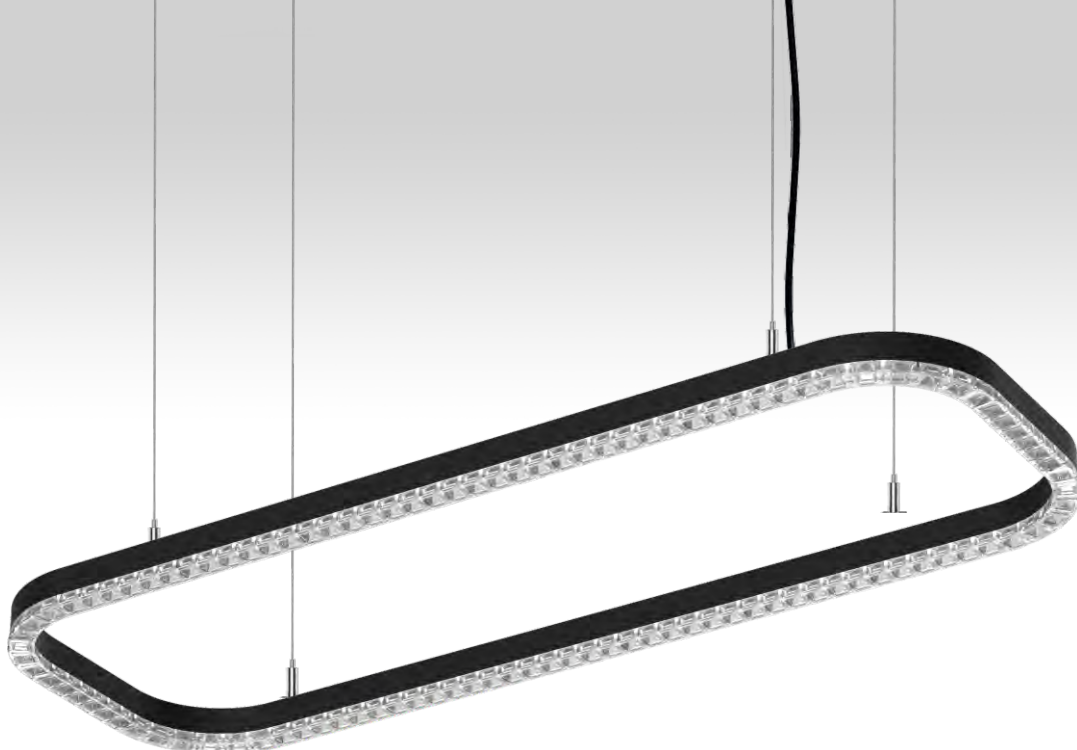


NOVO


Linear light

NEW

Curved-corner rectangular Design

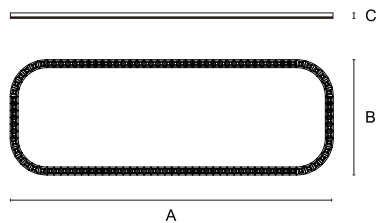

- Two installation methods available: pendant and surface mounted.
- Optional with backlight function.
- The light housing is made of high quality aluminum alloy material. Powder coating, corrosion resistance, easy to clean.
- The lens is covered with optical stripes to refract the light surface, which refracts peripheral light to improve light efficiency. The stripes are surrounded by transparent curved surfaces, showing a full crystal texture.
- 0-10V/DALI dimming from 10% to 100%. A good option for different environment atmosphere and eye protection. Ideal for wide spaces such as commercial office living room, restaurant and exhibition hall,etc.

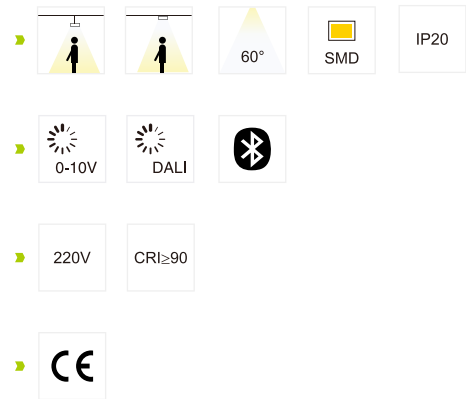

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8717 308	100W	10000lm	60°	1220x435.3x46	pendant/surface mounted

CCT

3000K


4000K

5700K

Color

White


Black

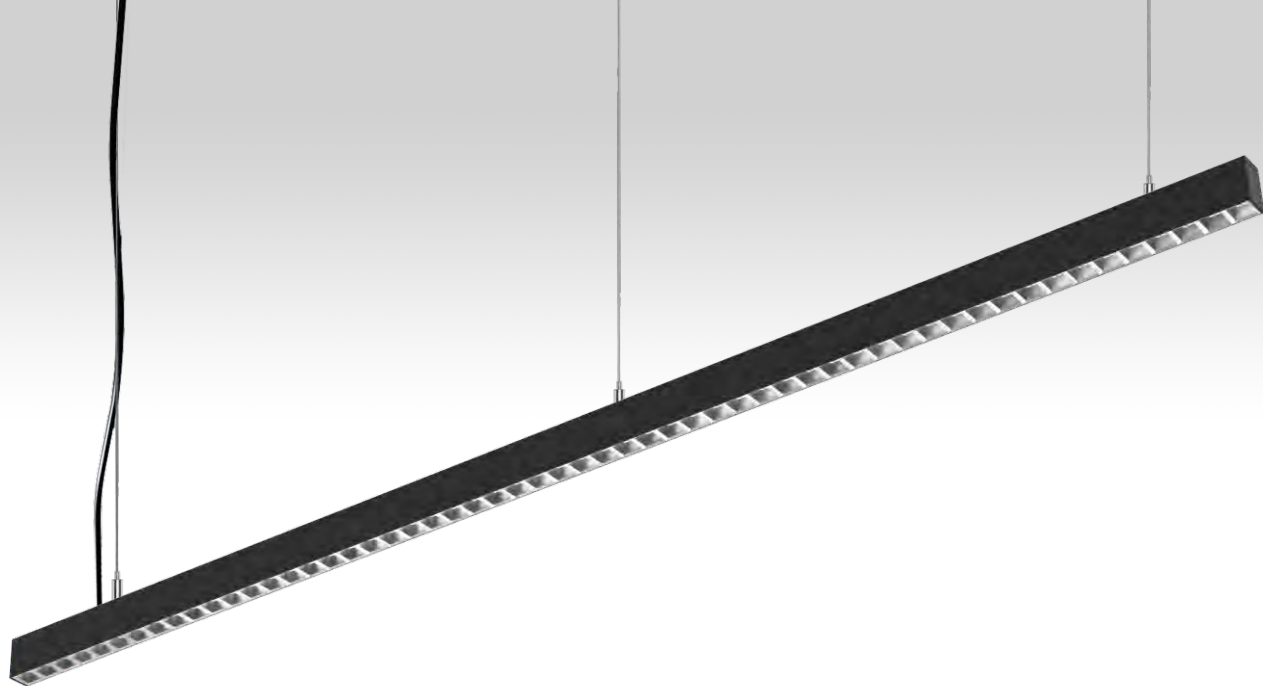

MIRADA Linear light

NEW

Straight Design

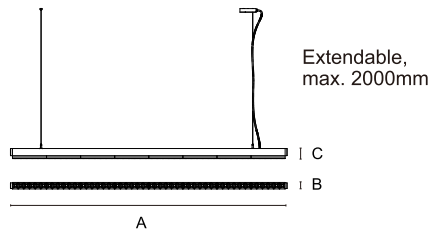

- Two installation methods available: pendant and surface mounted.
- Optional with backlight function.
- The light housing is made of high quality aluminum alloy material. Powder coating, corrosion resistance, easy to clean.
- 0-10V/DALI dimming from 10% to 100%. A good option for different environment atmosphere and eye protection. Ideal for wide spaces such as commercial office living room, restaurant and exhibition hall,etc.

▶

▶

▶

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8718 306	25W	2500lm	60°	1129.4x40.6x71	pendant/surface mounted
8718 307	50W	5000lm	60°	2249.8x40.6x71	pendant/surface mounted

Reflector colour

Bright Black Blue

Bright Gold

Frosted Silver

Bright Silver

Transparent

CCT

3000K


4000K

6500K

Color

White


Black

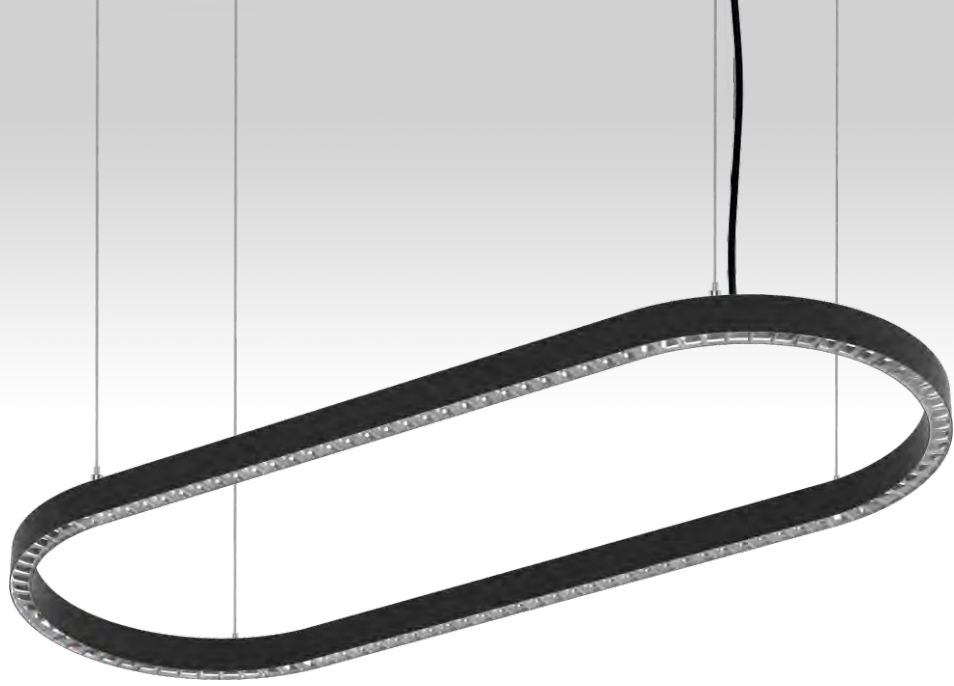

MIRADA Linear light

NEW

Oval Design

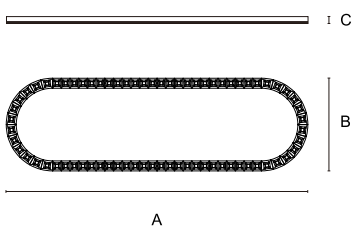

- Two installation methods available: pendant and surface mounted.
- Optional with backlight function.
- The light housing is made of high quality aluminum alloy material. Powder coating, corrosion resistance, easy to clean.
- 0-10V/DALI dimming from 10% to 100%. A good option for different environment atmosphere and eye protection. Ideal for wide spaces such as commercial office living room, restaurant and exhibition hall,etc.

▶

▶

▶

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8718 305	90W	9000lm	60°	1869.5x750x71	pendant/surface mounted

Reflector colour

Bright Black Blue

Bright Gold

Frosted Silver

Bright Silver

Transparent

CCT

3000K


4000K

6500K

Color

White


Black

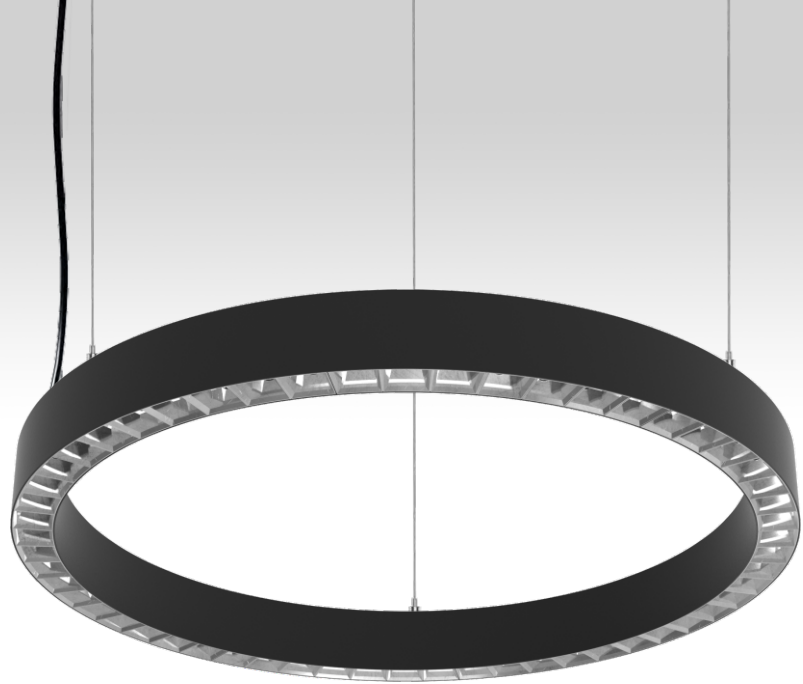

MIRADA Linear light

NEW

Rounded Design



- Two installation methods available: pendant and surface mounted.
- Optional with backlight function.
- The light housing is made of high quality aluminum alloy material. Powder coating, corrosion resistance, easy to clean.
- 0-10V/DALI dimming from 10% to 100%. A good option for different environment atmosphere and eye protection. Ideal for wide spaces such as commercial office living room, restaurant and exhibition hall,etc.

▶

▶

▶

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8718 301	45W	4500lm	60°	Ø750x71	pendant/surface mounted
8718 302	90W	9000lm	60°	Ø1459x71	pendant/surface mounted

Reflector colour

Bright Black Blue

Bright Gold

Frosted Silver

Bright Silver

Transparent

CCT

3000K


4000K

6500K

Color

White


Black

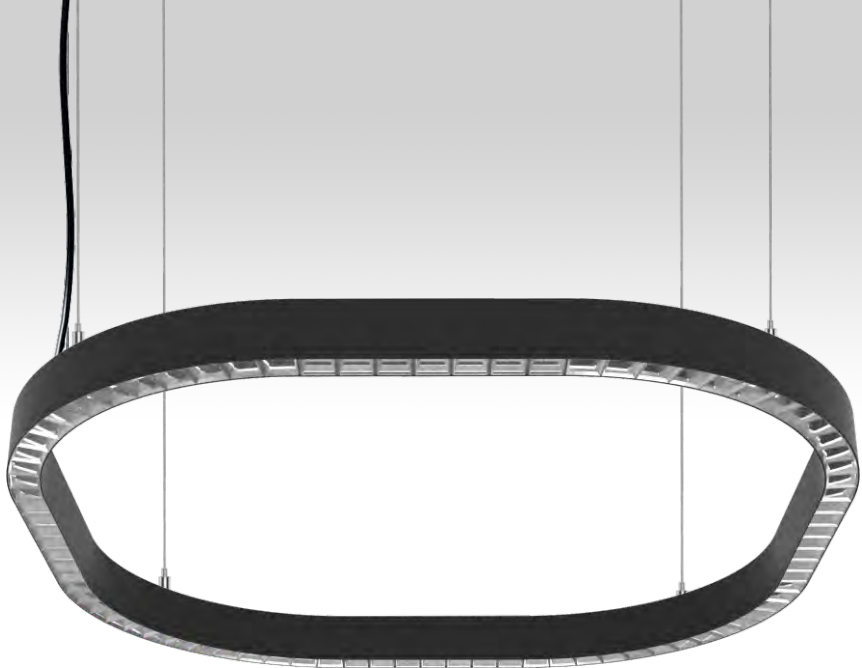

MIRADA Linear light

NEW

Square Design



- Two installation methods available: pendant and surface mounted.
- Optional with backlight function.
- The light housing is made of high quality aluminum alloy material. Powder coating, corrosion resistance, easy to clean.
- 0-10V/DALI dimming from 10% to 100%. A good option for different environment atmosphere and eye protection. Ideal for wide spaces such as commercial office living room, restaurant and exhibition hall,etc.

▶

▶

▶

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBmm)	Installation
8718 303	65W	6500lm	60°	□1030x71	pendant/surface mounted
8718 304	90W	9000lm	60°	□1310x71	pendant/surface mounted

Reflector colour

Bright Black Blue

Bright Gold

Frosted Silver

Bright Silver

Transparent

CCT

3000K


4000K

6500K

Color


White

Black

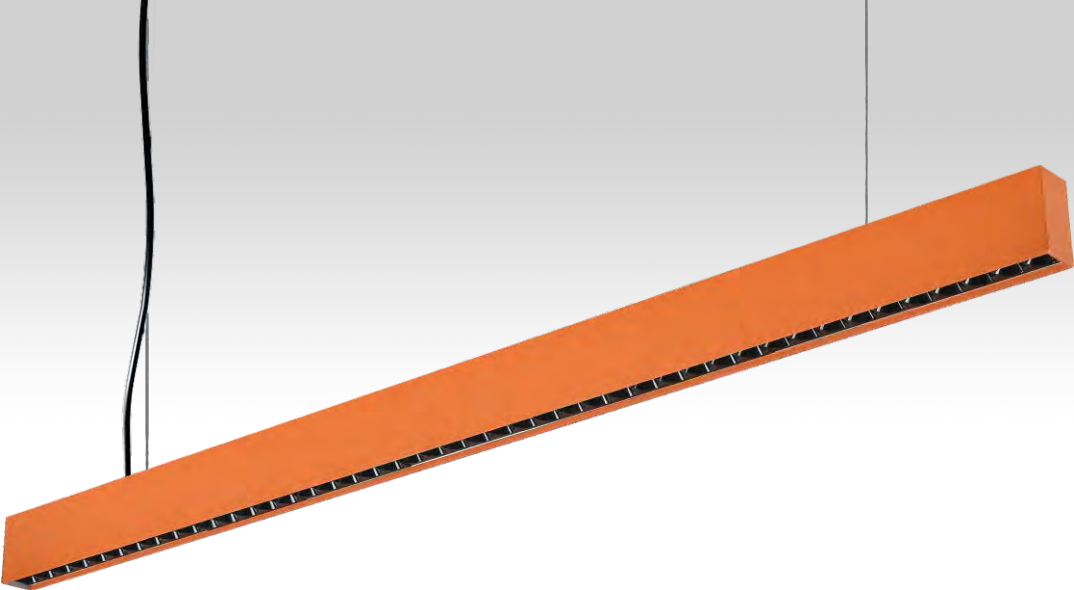

ECLAT Linear light

NEW



- More than just lighting, a space shaper Our newly launched commercial lighting line series perfectly blends functionality and aesthetics.
- Whether featuring a minimalist grille, professional anti-glare prism panels, or a soft diffuser, each one is meticulously designed to enhance the quality of any space.

▶

▶

▶

▶


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8735 701(Lens type)	30W	3000lm	24°	1200x36.7x70.2	pendant/surface mounted
8735 702(Linear type)	30W	2400lm	60°	1200x36.7x70.2	pendant/surface mounted
8735 703(Micropismatic diffuser)	30W	3000lm	100°	1200x36.7x70.2	pendant/surface mounted
8735 704(Honeycomb type)	30W	2400lm	60°	1200x36.7x70.2	pendant/surface mounted




Lens type



Linear type



Micropismatic diffuser



Honeycomb type

CCT

3000K

4000K

5700K

Available Colours

001

002

003

004


005

006


007

008



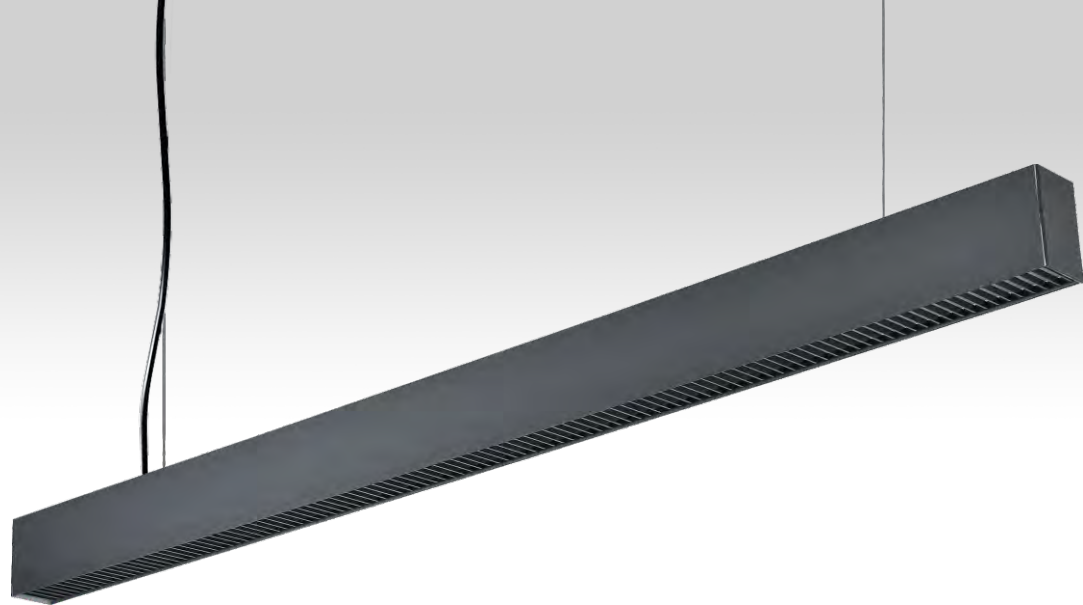

SERENITA Linear light NEW



- Light and shadow art, spatial rhythm - a new generation of multifunctional commercial linear lights, reshaping the new dimension of lighting.
- Freely combine.
- A variety of optical options are available.


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8750 801(Lens type)	30W	3000lm	24°	1200x50x80	pendant/surface mounted
8750 801(Linear type)	30W	2400lm	60°	1200x50x80	pendant/surface mounted
8750 801(Micropismatic diffuser)	30W	3000lm	100°	1200x50x80	pendant/surface mounted
8750 801(Honeycomb type)	30W	2400lm	60°	1200x50x80	pendant/surface mounted




Lens type



Linear type



Micropismatic diffuser



Honeycomb type

CCT

3000K

4000K

5700K

Available Colours

001

002

003

004


005

006

007

008




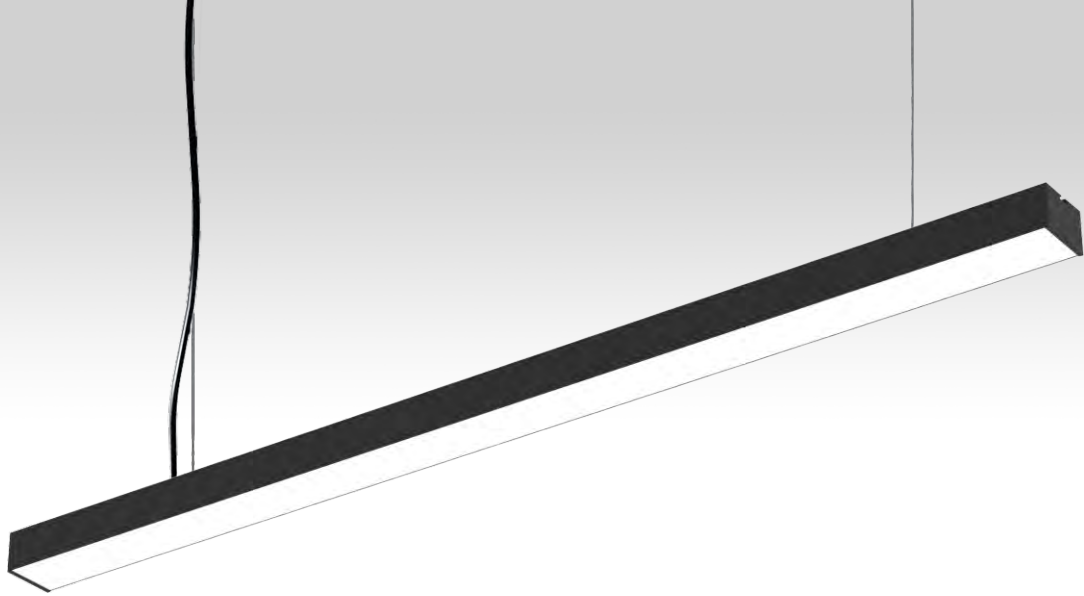

LUNA

Linear light

NEW



- Flexible Shapes: It supports splicing, bending, and cutting, allowing for flexible creation of various geometric shapes.
- Customizable Sizes: Lengths can be customized to meet project requirements, achieving seamless integration and meeting the lighting requirements of spaces of varying sizes.

▶

▶

▶

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8750 351	25W	3000lm	100°	1200x50.8x35.2	pendant/surface mounted
8750 352	30W	3600lm	100°	1200x60.8x35.2	pendant/surface mounted
8750 353	40W	4800lm	100°	1200x70.8x35.2	pendant/surface mounted
8750 354	50W	6000lm	100°	1200x80.8x35.2	pendant/surface mounted
8750 355	55W	6600lm	100°	1200x100.8x35.2	pendant/surface mounted

CCT —

3000K

4000K

5700K

Available Colours

001

002

003


004

005

006

007


008

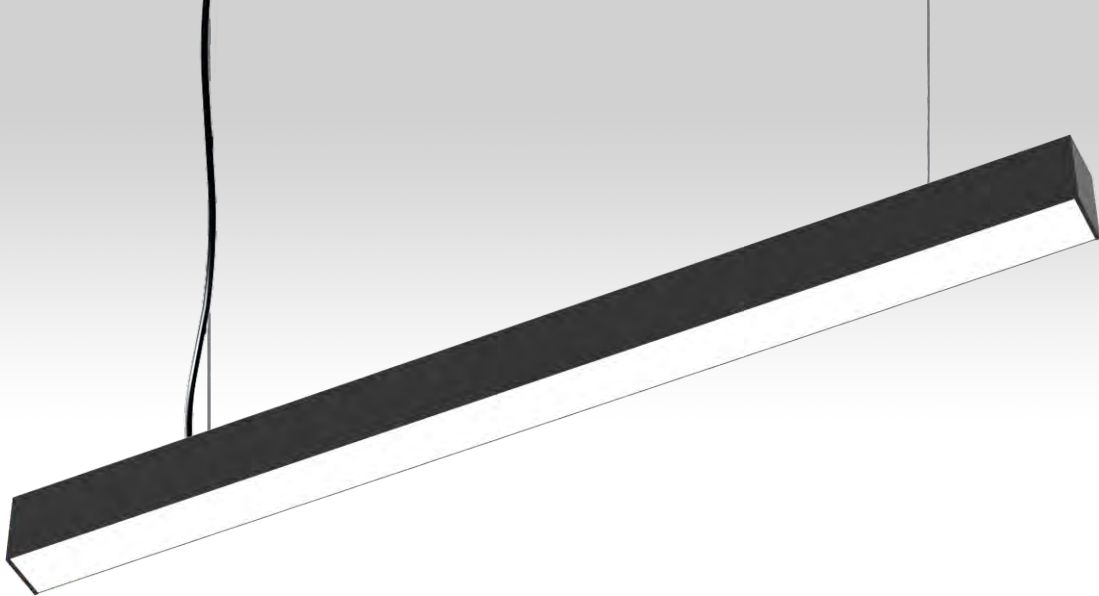

VENTUS

Linear light

NEW



- Freely combine, limitless possibilities.
- The modular design allows lighting to transcend traditional limitations.
- Straight lines, curves, and intersections can be freely combined to create a variety of shapes, easily embodying diverse applications such as ceiling contouring, shelf accent lighting, and space zoning, making light the ultimate decorative element.

▶

▶

▶

▶

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8750 751	25W	3000lm	100°	1200x50.8x75	pendant/surface mounted
8750 752	30W	3600lm	100°	1200x60.8x75	pendant/surface mounted
8750 753	40W	4800lm	100°	1200x70.8x75	pendant/surface mounted
8750 754	50W	6000lm	100°	1200x80.8x75	pendant/surface mounted
8750 755	55W	6600lm	100°	1200x100.8x75	pendant/surface mounted

CCT —

3000K

4000K

5700K

Available Colours

001

002

003

004

005


006

007


008



YAFFA Linear light NEW

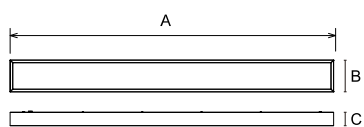

- The light housing is made of high quality aluminum alloy material. Powder coating, corrosion resistance, easy to clean.
- Using imported high transmittance PC flexible anti-glare cover, which is specially designed for LED source.
- Linkable Solution, Customized length Maximum link to 40M.
- 0-10V/DALI dimming from 10% to 100%. A good option for different environment atmosphere and eye protection. Ideal for wide spaces such as commercial office living room, restaurant and exhibition hall,etc,

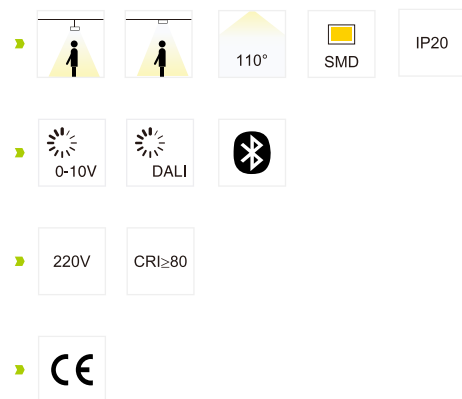


Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8711 501	12W	960lm	110°	300x55x65	pendant/surface mounted
8711 502	24W	1920lm	110°	600x55x65	pendant/surface mounted
8711 503	36W	2880lm	110°	900x55x65	pendant/surface mounted
8711 504	50W	4000lm	110°	1200x55x65	pendant/surface mounted
8711 505	60W	4800lm	110°	1500x55x65	pendant/surface mounted
8711 506	80W	6400lm	110°	2000x55x65	pendant/surface mounted

CCT — 3000K 4000K 5700K


Color — Black



GENOA Linear light NEW

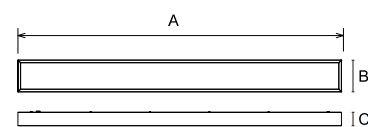

- The light housing is made of high quality aluminum alloy material. Powder coating, corrosion resistance, easy to clean.
- Using imported high transmittance PC flexible anti-glare cover, which is specially designed for LED source.
- Easy installation and quick splicing.
- 0-10V/DALI dimming from 10% to 100%. A good option for different environment atmosphere and eye protection. Ideal for wide spaces such as commercial office living room, restaurant and exhibition hall,etc,

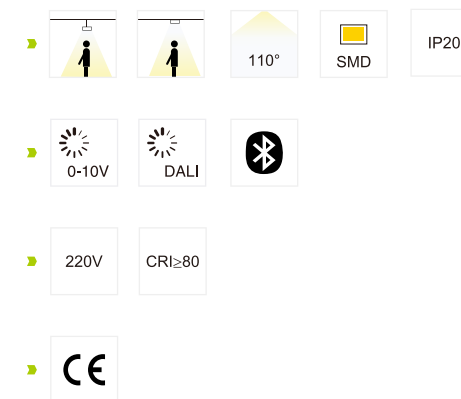

Code	Watt	Lumen(lm)	Optic	Size(AxBxCmm)	Installation
8711 601	12W	960lm	110°	300x58x58	pendant/surface mounted
8711 602	24W	1920lm	110°	600x58x58	pendant/surface mounted
8711 603	36W	2880lm	110°	900x58x58	pendant/surface mounted
8711 604	50W	4000lm	110°	1200x58x58	pendant/surface mounted
8711 605	60W	4800lm	110°	1500x58x58	pendant/surface mounted
8711 606	80W	6400lm	110°	2000x58x58	pendant/surface mounted

CCT — 3000K 4000K 5700K

Color — Black